## U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through 1).


(a) identify the corner by reference to the U.S. public land survey system.

O = Corner monument restored.

Section Corner to Sections 28 and 33, T.34N., R.14E., Forest County, Wisconsin.

State Plane Coordinates
Wisconsin North zone
85116.08206-N
2289576.62837-E

Geographic Coordinates 45-23-35.37546-N 088-45-00.79608-W

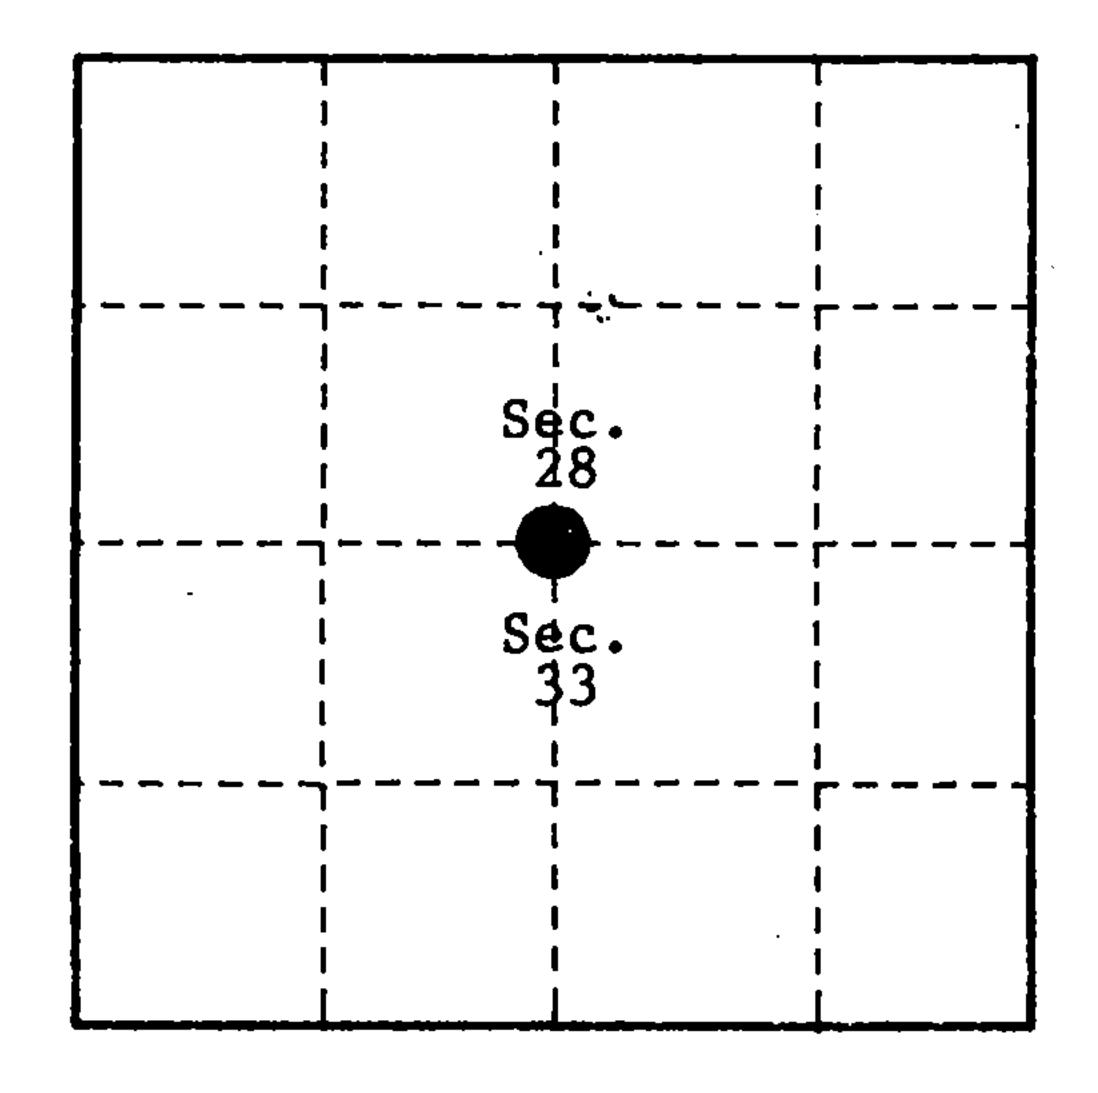

(b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1859 James McBride set a wood post and bearing trees; Hemlock, 16", N.71°W., 5 links (3.30 feet), Hemlock, 8", S.23°E., 25 links (16.50 feet).


In 1922 N. Smith found & corner post and original bearing trees in good condition.

In 1936 A.J. Vaonch (CCC) found 1 post in good condition and bearing tree stump; Hemlock, 14", S.54°W., 7 links (4.62 feet).

In 1987 Paul Smith (RLS) found old post hole with 1" iron pipe at fence corner: Set a Forest County Monument with bearing trees; Maple, 10", S.88°E., 22.61 feet, Maple, 14", S.37°E., 21.52 feet, Maple, 20", N.70°W., 24.14 feet.

On 1993 Alan Harrison found Smith's monument and bearing trees: adding a Steel Sign Post, Southwest, 1.70 feet.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron orother equally durable material.)
- (d) Show a plan view drawing depicting the relevent monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.
  - 1. Forest County Monument
  - 2. Maple, 9", S.76°E., 22.80 feet.
  - 3. Maple, 12", S.44°E., 22.29 feet.
  - 4. Maple, 17", N.74°W., 24.80 feet.
  - 5. Steel Sign Post, Southwest, 1.70 feet.

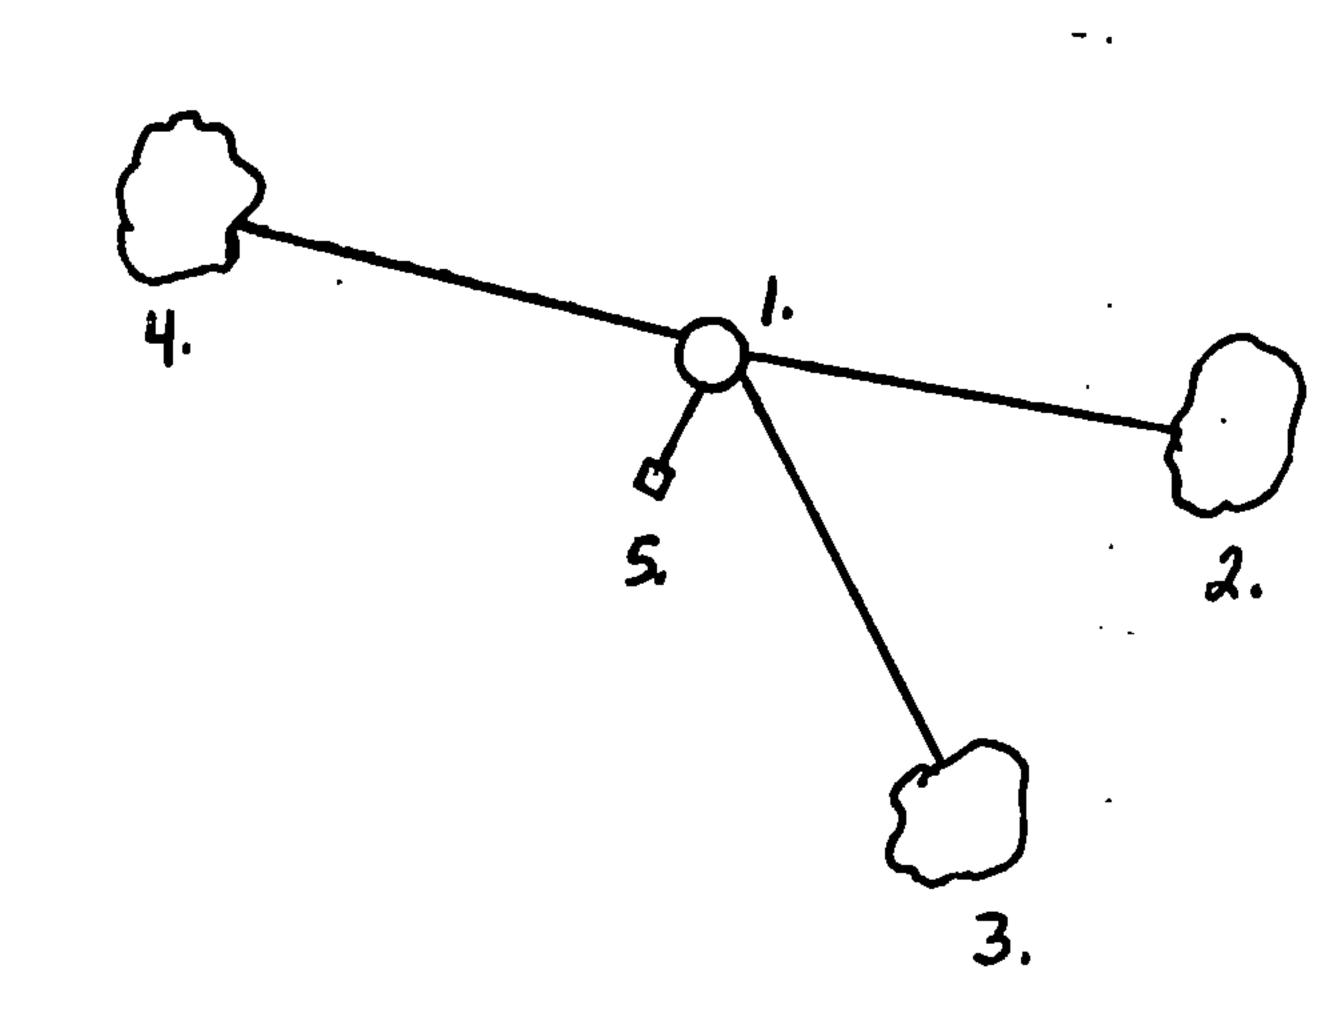

( e )	Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d). above. Show the distances between the corner as previously restored or reestablished				
	and (1) the corner as restored or r monuments shown on the drawing in (	eestablished.			
	None.		•		
		-		tod avldanca	10000100 00 (2) 0
•	Was the corner restored through acc found perpetuated location?	eprance of ( )	) an oblitero	rea evidence	iocailon, or, (2) a
	(2)	,			
					•
. a . 8	h) Was the corner reestablished th	rough lost coi	rner brobert	onate method	le? If so show the
	method, including the direction as evidence or used for propor	ns and distanc	es to other	public land	survey corners used
	No.		•		
		-			
	•				
		•	,	•	
		•			
		•			
		•			
			•	•	
				RE(	SISTER'S OFFICE
			-	rc	eived for record this day
			•	in Ve	20'clock A.M. and recorded
				page.	34.14.17. 34.14.17.1/2 Dant
					Register of Deeds
	•			1 ! A	11   X   A CONTROL Section
	•		•		
					ALAN D. HARRISON
_	. Alan D. Harrison		-		S-1651 WABENO
[ 1 ]	(type or print name) certify that the	he corner loca	Itlon shown		WIS.
	on this record was determined by me control and that this U.S. Public Lacorrect and complete to the best of	and Survey Mon	ument Record	i s	SURVENO

Da't e

District Ranger

Signature

CERTIFICATE READY FOR FILING: