

FILED ON:
11/11/2025 03:52 PM
CORTNEY BRITTEN CLEEREMAN
REGISTER OF DEEDS
FOREST COUNTY WI
PAGES: 1

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a)(b)(c)(d)(e)(f)(g)(h)(i).

The coordinate value shown has been verified by at least one of the following methods: 1) Comparison to a previously GNSS determined published value; 2) The value is the average of two or more GNSS observations at a markedly different time; 3) One or more distances were measured back to the GNSS observed corner from temporary GNSS observed offset locations.


A-E 7.08(3)(a) Identity of the corner:

E 1/4 Corner Section 18	WISCRS - Forest County
Township 34 North	N: 519406.272 USFT
Range 13 East	E: 835703.791 USFT
Town of Nashville	Datum: NAD 83 (2011)
County of Forest	GNSS Method: WISCORS VRS Direct Observation

Original Corner Information:

Original Surveyor: J.L. Nowlin	Original B.T.'s: Hemlock 20" - S85°W, 6 links
Date of Survey: October 1865	Hemlock 8" - N85°E, 10 links

Corner ID: 43413182000

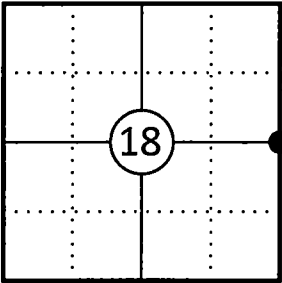


A-E 7.08(3)(b)(e)(f)(g) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence considered. Describe any discrepancy between the corner restored and any previously established location. State whether the corners was restored through acceptance of obliterated evidence, a found perpetuated location, or determined by proportionate methods.


1966 W.H. Stuth, Owens - Illinois indicates does not show a monument at this location on the survey prepared on March 5, 1987.

05/14/2025 We found no subsequent surveys where anyone found or showed the east quarter corner of Section 18. I searched for and found no remaining evidence of the original corner or bearing trees. We positioned the corner by single proportion online and midway between the northeast and southeast corners of Section 18 and set a Forest County aluminum monument with a 3" dia. cap stamped to identify the corner 3" above grade and made four new bearing trees to witness the corner as shown below.


A-E 7.08(3)(c)(d)(e)(h) Plan view of corner with ties to at least four witnesses. If in disagreement with previously established corner, show the distances between the two corners and also indicate the tie to the disputed corner. Distances and directions to other PLSS used as evidence or for proportioning.

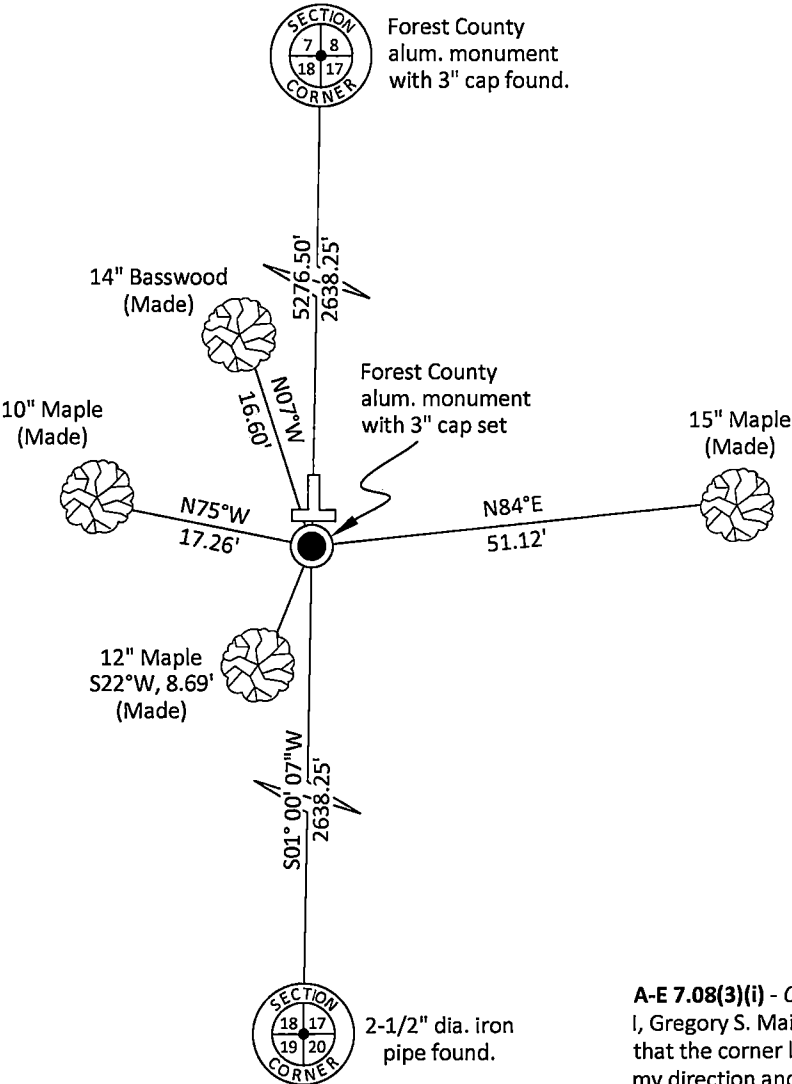

Bearings given to the nearest second are Forest County Grid. All other bearings are magnetic



- * Vinyl "T" post 0.6' north of corner.
- * Distances to bearing trees are to nail in side with BT tag on tree.
- * Sketch is not to scale

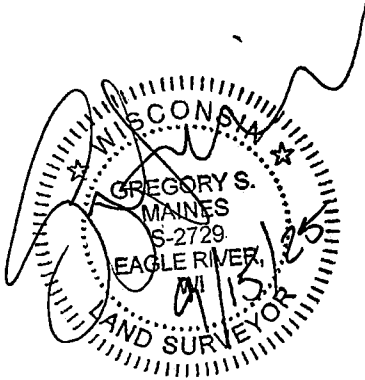

A-E 7.08(3)(i) - Certification
I, Gregory S. Maines, Professional Land Surveyor No. 2729, hereby certify that the corner location on this record was referenced by me or under my direction and control and that this U.S. Public Land Survey Monument Record is complete to the best of my knowledge and belief.

43413182000

Index No.: 15