

U. S. PUBLIC LAND SURVEY MONUMENT RECORD


I N S T R U C T I O N S :

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.

○ = Corner monument restored.

Quarter Corner to Sections 14 and 23, T.34N., R.14E.

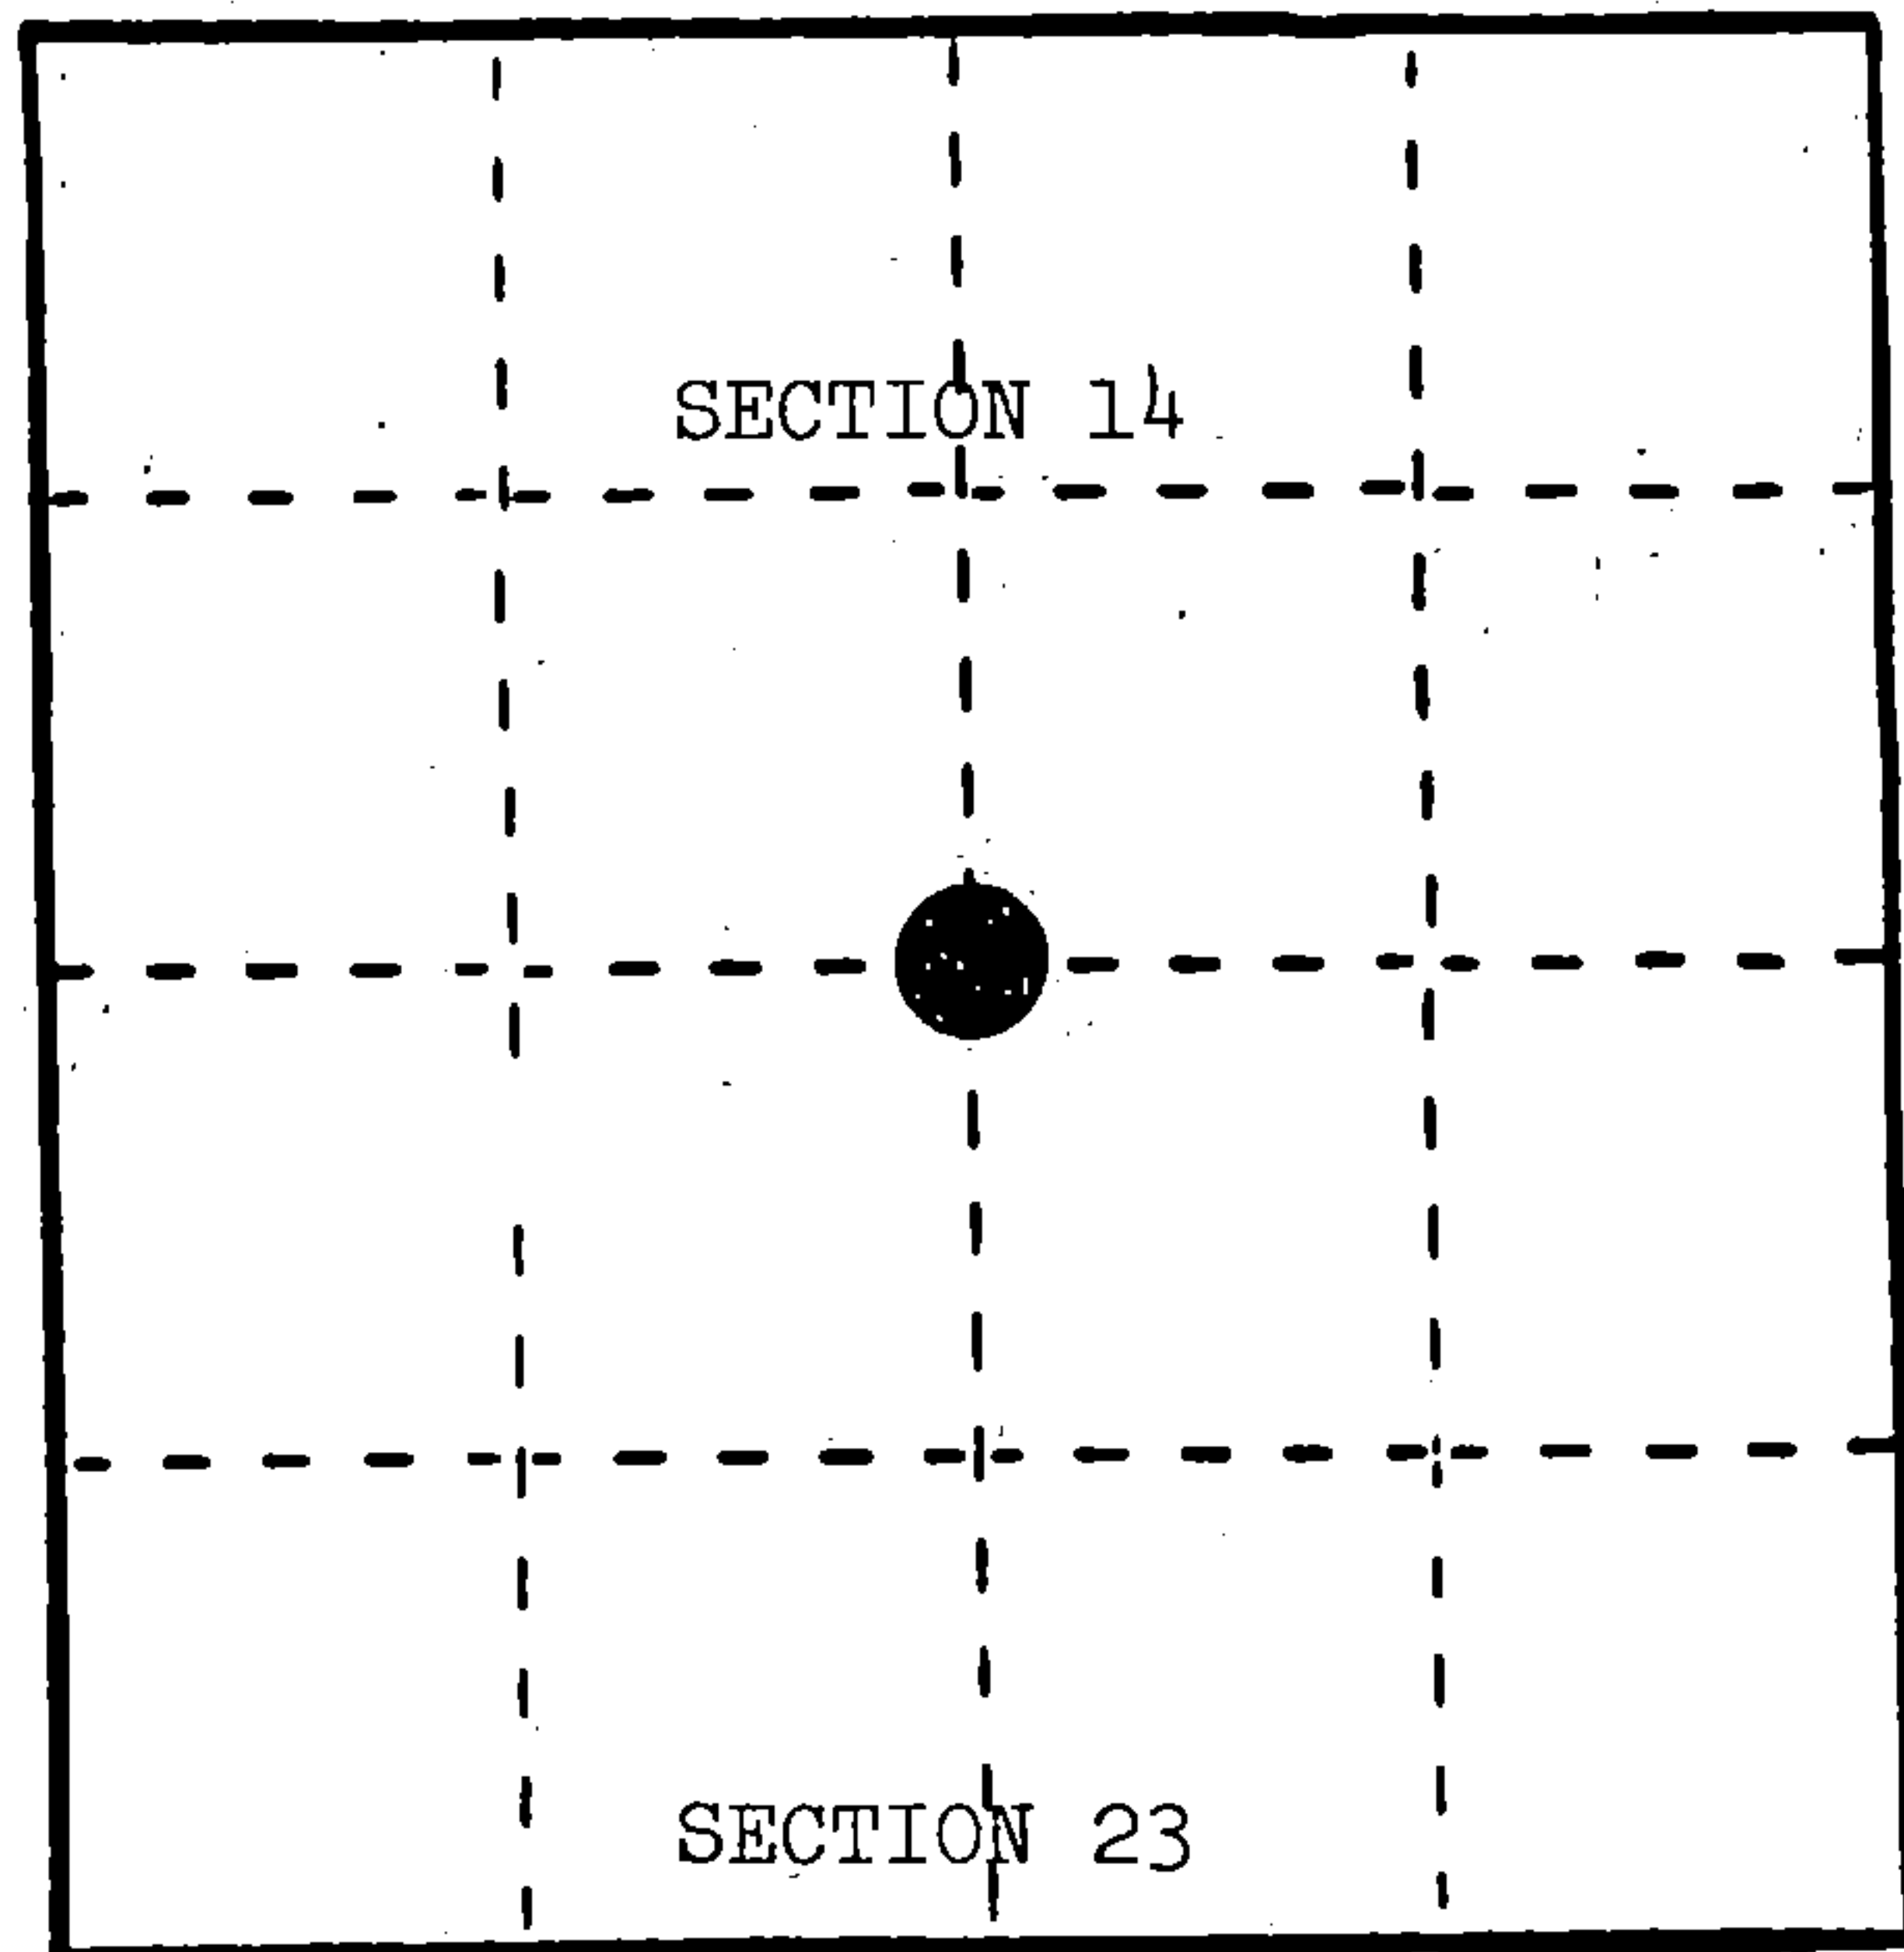

REGISTER'S OFFICE
Forest County, Wis.

Received for record this 17th day

of February A.D. 1988 at

10:00 o'clock A.M. and recorded

in Vol. CORNER RESTORATIONS

page N-19

Paul A. Schenck
Register of Deeds

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1859, James McBride set wood post with the following BTs: Elm, 12", S.34°W., 12 links; Elm, 14", N.55°E., 13 links.

In March, 1908, J. J. Melendy ran from NW corner of Section 23 east to $\frac{1}{4}$ corner. Set an 8" x 10" x 14" stone with Hemlock witness posts, 2 rods north and south. Original BTs were stumps, marks plain and visible.

In 1934, John Faird found a post 18" above ground, 1' south of fence corner and put a location tag on fence corner. (Post found is most likely Melendy's witness, 2 rods north of corner.)


In 1985, Alan Harrison found fence lines north and south and set nail in centerline of road and tied to traverse.

In 1987, Alan Harrison found the position of the nail to fit well with the Melendy survey and replaced it with a 1" iron rod.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.) Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

- 1" iron rod marking corner location.
- 2 $\frac{1}{2}$ " x 36" Aluminum Monument Witness Corner, North, 29.97 feet.
Steel Sign Post, 0.80' North of Witness Corner.
- 2 $\frac{1}{2}$ " x 36" Aluminum Monument Witness Corner, South, 34.06 feet.
- Steel Sign Post, 1.00' South of Witness Corner.

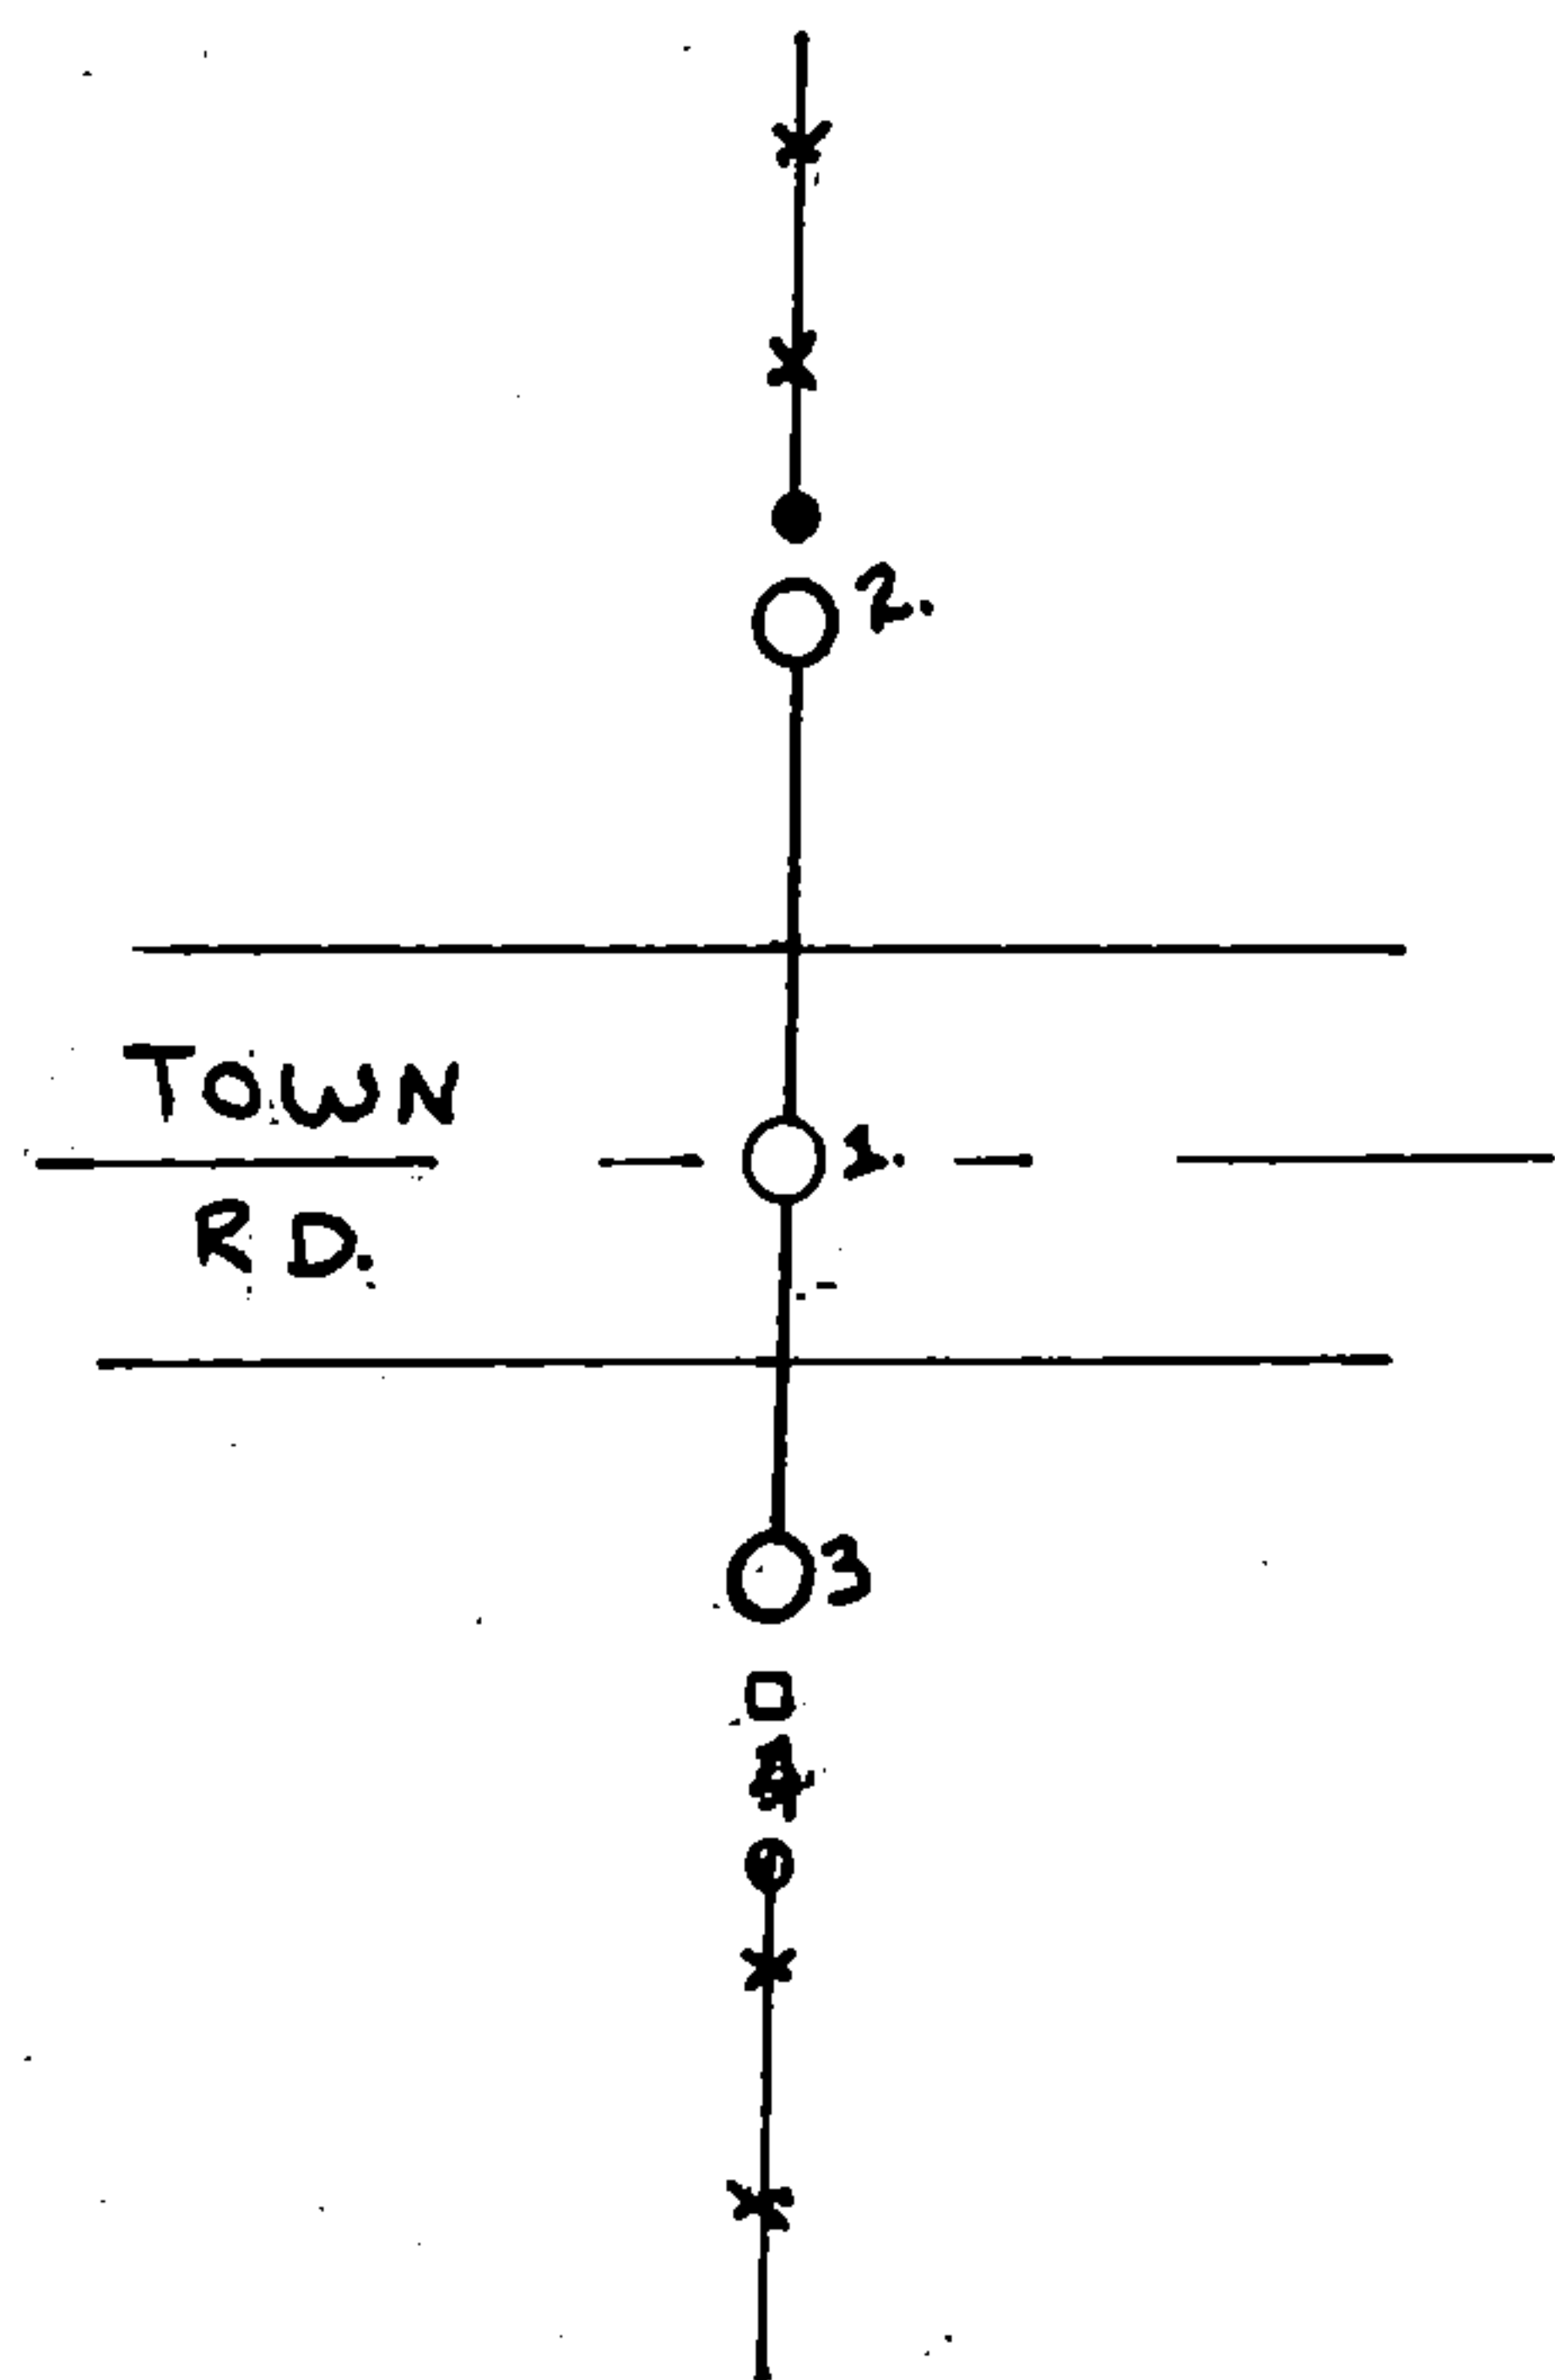

- (e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None.

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(1) an obliterated evidence location.

- (g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No.

- (i) I, Alan D. Harrison
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison
Signature

2/11/88
Date

