Σ	06973
HC Miller Compa	Z
<u>ਜ</u> ਼	Stock

DOCUMENT NUMBER

HC		I ANID	CHRVEY	MACRILINAE NIT	DECORD
U. J.	PUBLIC	LANU	SURVET	MONUMENT	RECURD

Index No.	E-19
THURST INCL.	

State	of	Wisconsin		
ounty of	FOR	EST	-	· [

I... John Schulke , do hereby certify that on the 15th day of August , 19.89., I found evidence of the North Quarter corner of Section 11.

Township 37 , North, Range 12 East , Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:	•
Al Tauer	·····
Roman Tauer	

	SECTION
 1	

= Corner monument restored.

History of original corner establishment:

In 1859, Original Government Surveyed by Wm. E. Daugherty. Set a wood post with the following corner references: Birch 6" S32°E 29 1ks.

Hemlock 25" N32°W 25 1ks.

Description of corner evidence found:

In 1989, John Schulke found no evidence of the original corner. Resident witnesses stated original corner stood in North-South fence line about 2 feet South of the fence corner. I accept this as the best available evidence of the corner position.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2 1/2" dia. X 36" aluminum magnetic cap monument stamped to identify the corner. Fence line running North and South. Fence corner bears North a distance of 2.2 ft. from the monument. Set a steel sign post 1.0 ft South of the monument. The following corner references:

Sugar Maple	5"	N87°E	7.07	ft.
Sugar Maple	5"	S09°E	32.22	fť.
Birch	10"	N36°W	22.96	ft.
Balsam	7"	s39°W	35.90	ft.

Dated at Mabera			•		
Signature County Surveyor, Register	Re_Title.Re	gister La	ıd Surveyor	Registra	tion No.S-1665
(County Surveyor, Register	ed Land Surveyo	or, or other duly	y authorized officia	l)	
	1.5	_			
Office of Register of Deeds, County of instrument was filed in this office for rec	ord on the	8th	day of	March	19.90
at 1:00,ø' clo ck P., M.			_		
Faul Achendra	an es				
(Register of Deed	s)	·	•		-

e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

No.

- (r) was the corner restored through acceptance or (1) an obliterated evidence location, or, (2) a found perpetuated location?
 - (1) an obliterated evidence location.

(gkh) was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?


No.

do

QUARTER CORNER

S2

S11

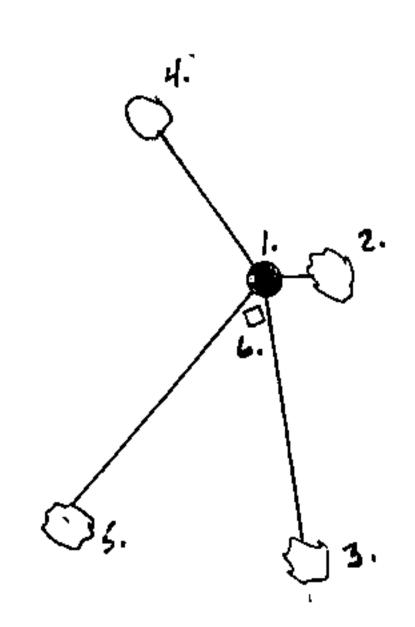

1. 2 1/2" X 36" aluminum monument.

2. Sugar Maple 5" N87°E 7.07 ft. 3. Sugar Maple 5" S09°E 32.22 ft. 4. Birch 10" N36°W 22.96 ft.

5. Balsam
 6. Steel-sign post---South--1.0-ft.

Affix Land Surveyor Scal

Affix Land Surveyor Scal

JOHN C.

SCHULKE

S-1665

LUDINGTON

MI

SURVEYOR

SUR

John Schulke (RLS-1665)

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

mature Trans

Oct 25, 1989

Survey requested by; District Ranger

1989

0 Date