DOCUMENT NUMBER

139183


U. S. PUBLIC LAND SURVEY MONUMENT RECORD.

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).

(a) Identify the corner by reference to the U.S. public land survey system.

O - Corner monument restored.

CENTER QUARTER CORNER TO SECTION 3, TWP. 34 N., R. 14 E.

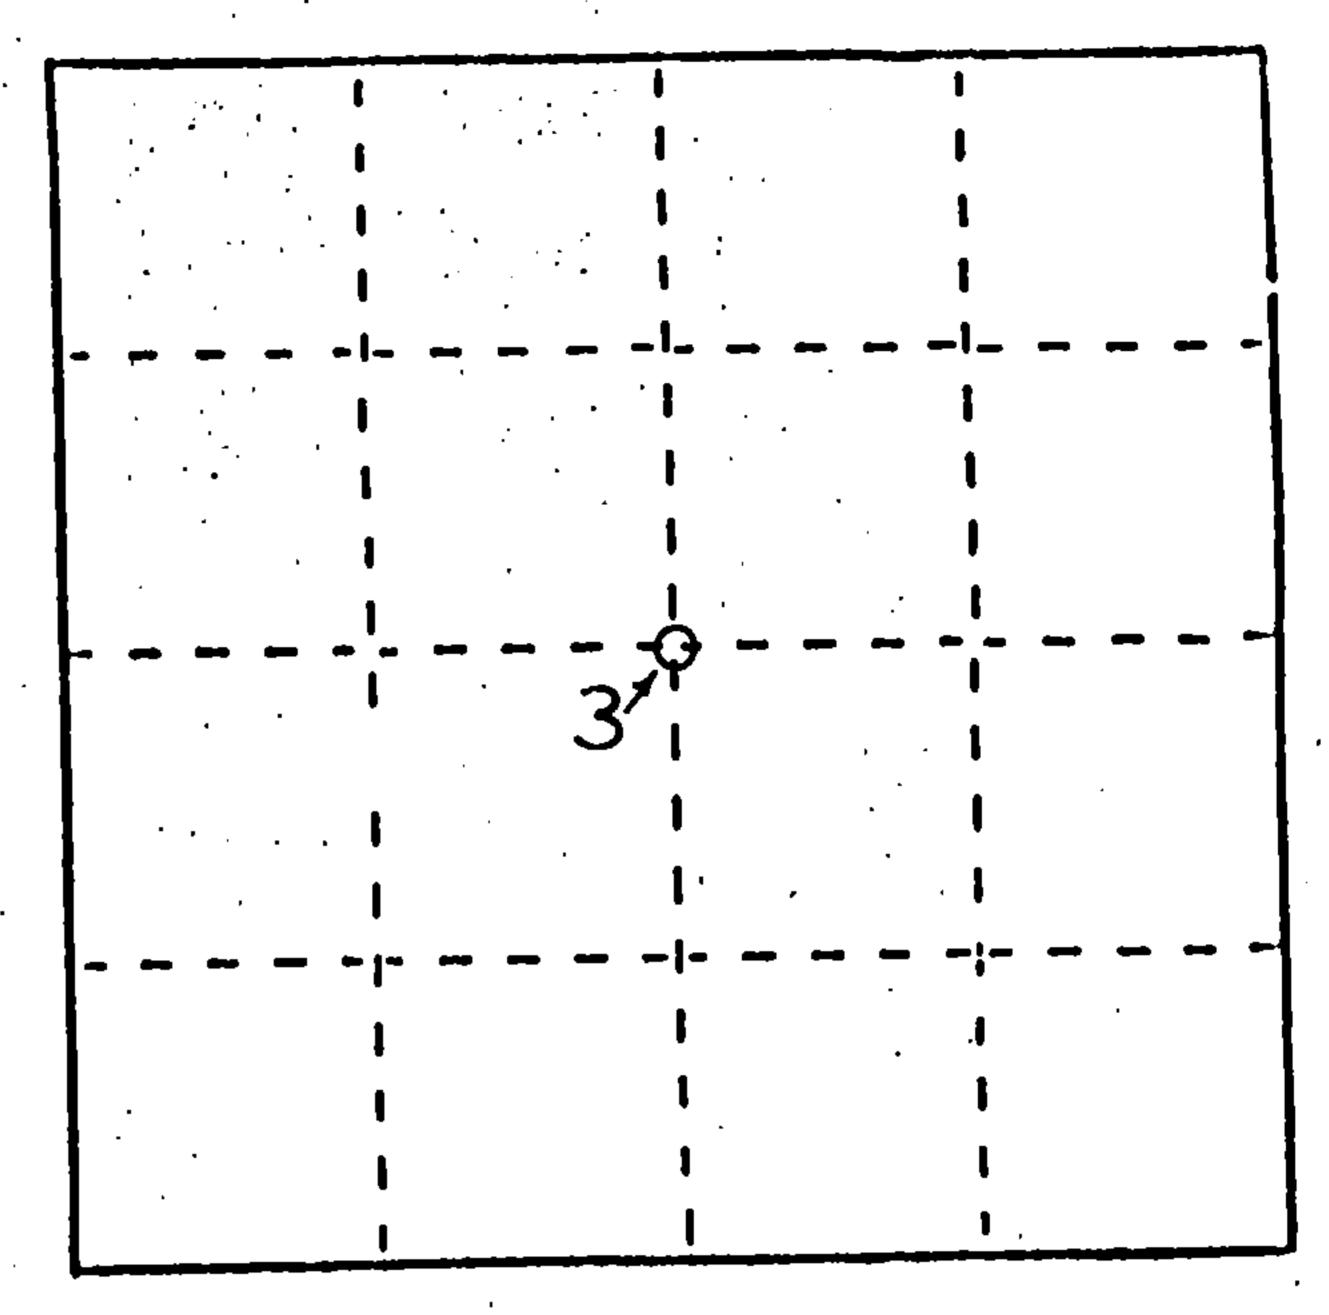

(b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

1857 & 1859	ORIGINAL SURVEY OF SECTION 3
	SUBDIVISION OF SECTION 3, BY STEFAN R.L.S. NO. S-1558
1982	PUDDIATION OF PROTEON AS DESCRIPTION AS DESCRIPTION AS DESCRIPTION
	SET 2" DIA. ALUMINUM MONUMENT AT CENTER QUARTER CORNER
	DELLE DELLE LEGISTE CO CATION MANANDACIZ DI C 20° F 20 73FT.
	B.T.s TAMARACK 6" N.17° E. 50.94FT., TAMARACK 8" S.29° E. 29.73FT.
	TAMARACK 10" S.19" W. 26.00FT.
	TAMARACK TO BOTT WE CONCOLLE
	WITTNESS STEEL SIGN POST NORTH 15.00FT.
	THE TABLE OF A STATE OF A STATE OF THE TOTAL OF AND DOSM AS MOMENT BY
1989	DOBBRATZ R.L.S. NO. S-973, FOUND B.T.S AND POST AS NOTED BY
. , , , , , , , , , , , , , , , , , , ,	STEERAN IN 1982. TOP OF MONUMENT SHEARED OFF BY ROAD GRADER.

(c) in the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

Describe witness monuments.

REGISTER'S OFFICE

Forest County, Wis.

Received for record this

of remies A.D., 1940 at

dapicting the ralevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

B.T.s 1 TAMARACK 6" N.17 E. 50.94FT. (EXISTING)

TAMARACK 8" S.29° E. 29.73FT. (EXISTING)

3) TAMARACK 10" S.19 W. 26.0FT. (EXISTING)

WITTNESS MONUMENTS

5 110NOFIEM 15


1" X 36" ALUMINUM MONUMENT 16.00FT. (NEW)

NORTH OF CENTER QUARTER CORNER

6 STEEL SIGN POST 15.05 NORTH OF (EXISTING) CENTER QUARTER CORNER

(4) CENTER QUARTER CORNER, REMAINS OF 2" DIA. ALUMINUM MONUMENT.

NOTE! 1" X 36" ALUMINUM MONUMENT IS STAMPED TO IDENTIFY CORNER.

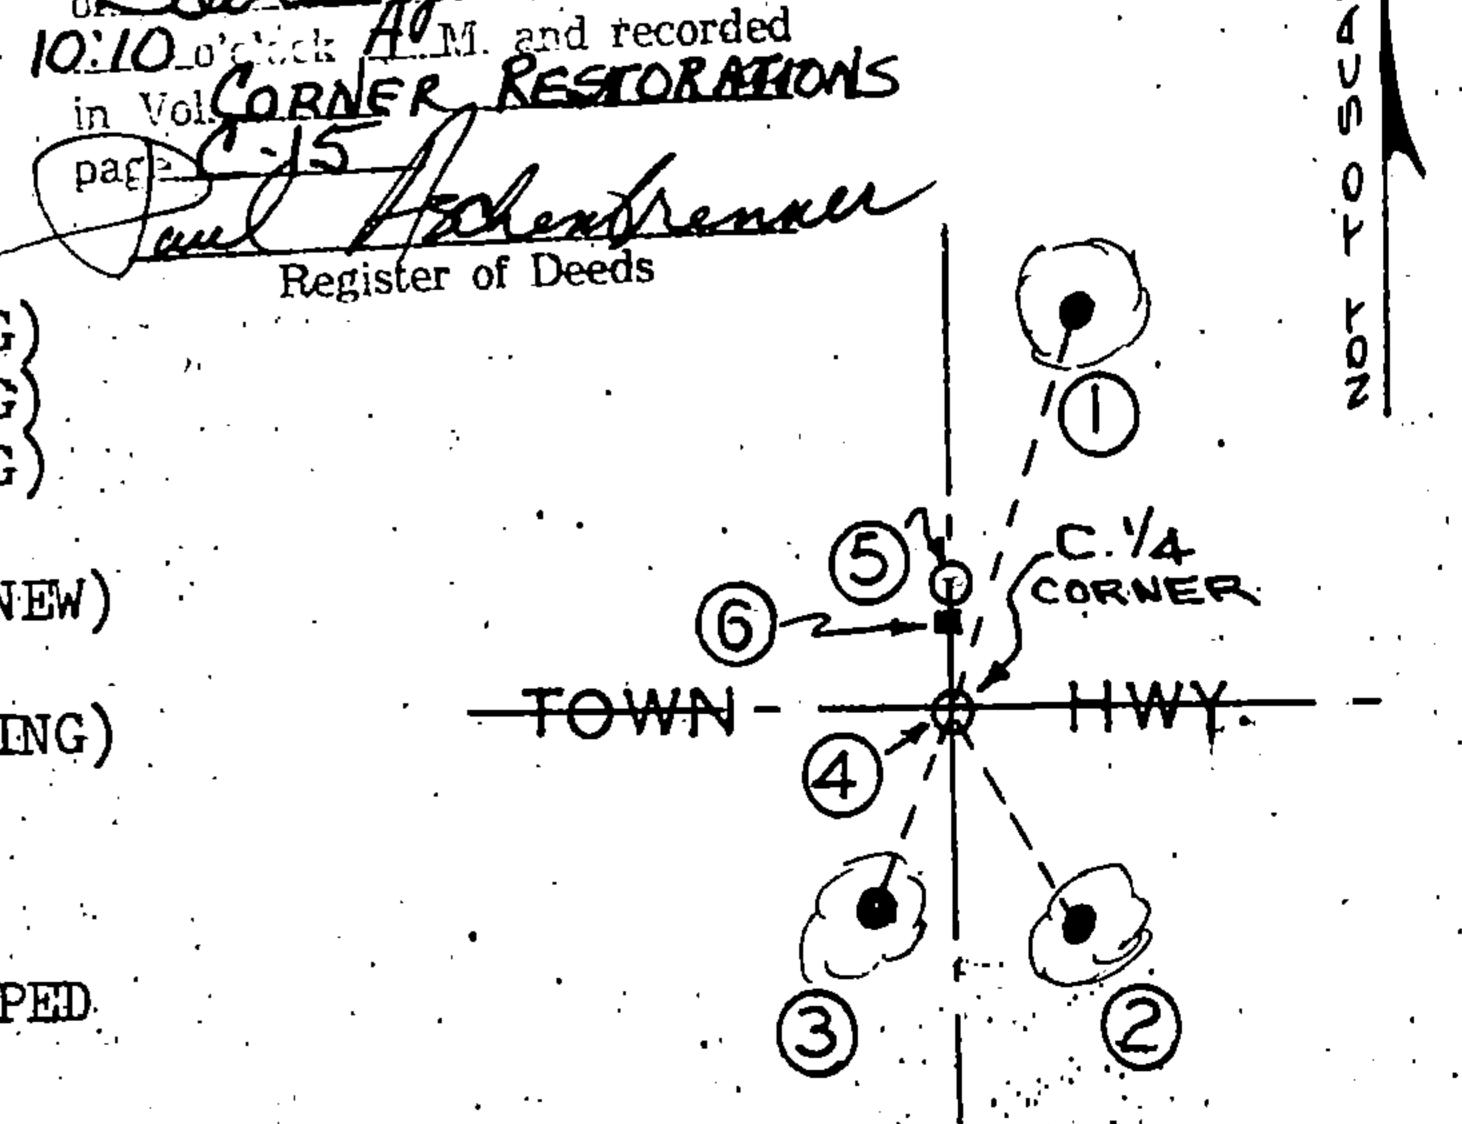

C= 15

(e) Describe any material discrepancy between the location of the corner as restored or reastabilished and the location of that corner as previously restored or reastablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reastablished and (1) the corner as restored or reastablished, and (2) to at least 2 of the witness manuments shown on the drawing in (d), above.

tipes distribility of the substant had be truly like section of the literation was a lift in the first of the bishops of

(NONE)

- [f] was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?
 - (2) FOUND PERPETUATED LOCATION
- (gan) was the corner reestablished through lost corner propertionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

Affix Land Surveyor Seal

OF WISCONS

WAYNE G.

DOBBRATZ

S-00973

TOWNSEND,

WIS.

WAYNE	G.	DOBBRATZ
-------	----	----------

ltype or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature de Colland

10/6/89

Date

CERTIFICATE READY FOR FILING:

District Ranger