

## U. S. PUBLIC LAND SURVEY MONUMENT RECORD

### INSTRUCTIONS:


This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.  
○ = Corner monument restored.

Quarter Corner Common to Sections 12 and 7, T.35N., R.16-17E. Forest/Marinette Counties, Wisconsin.

Geographic Coordinates: 45°31'41.859" North  
88°25'33.012" West

State Plane Coordinates: 135,863.552 North  
2,371,926.877 East

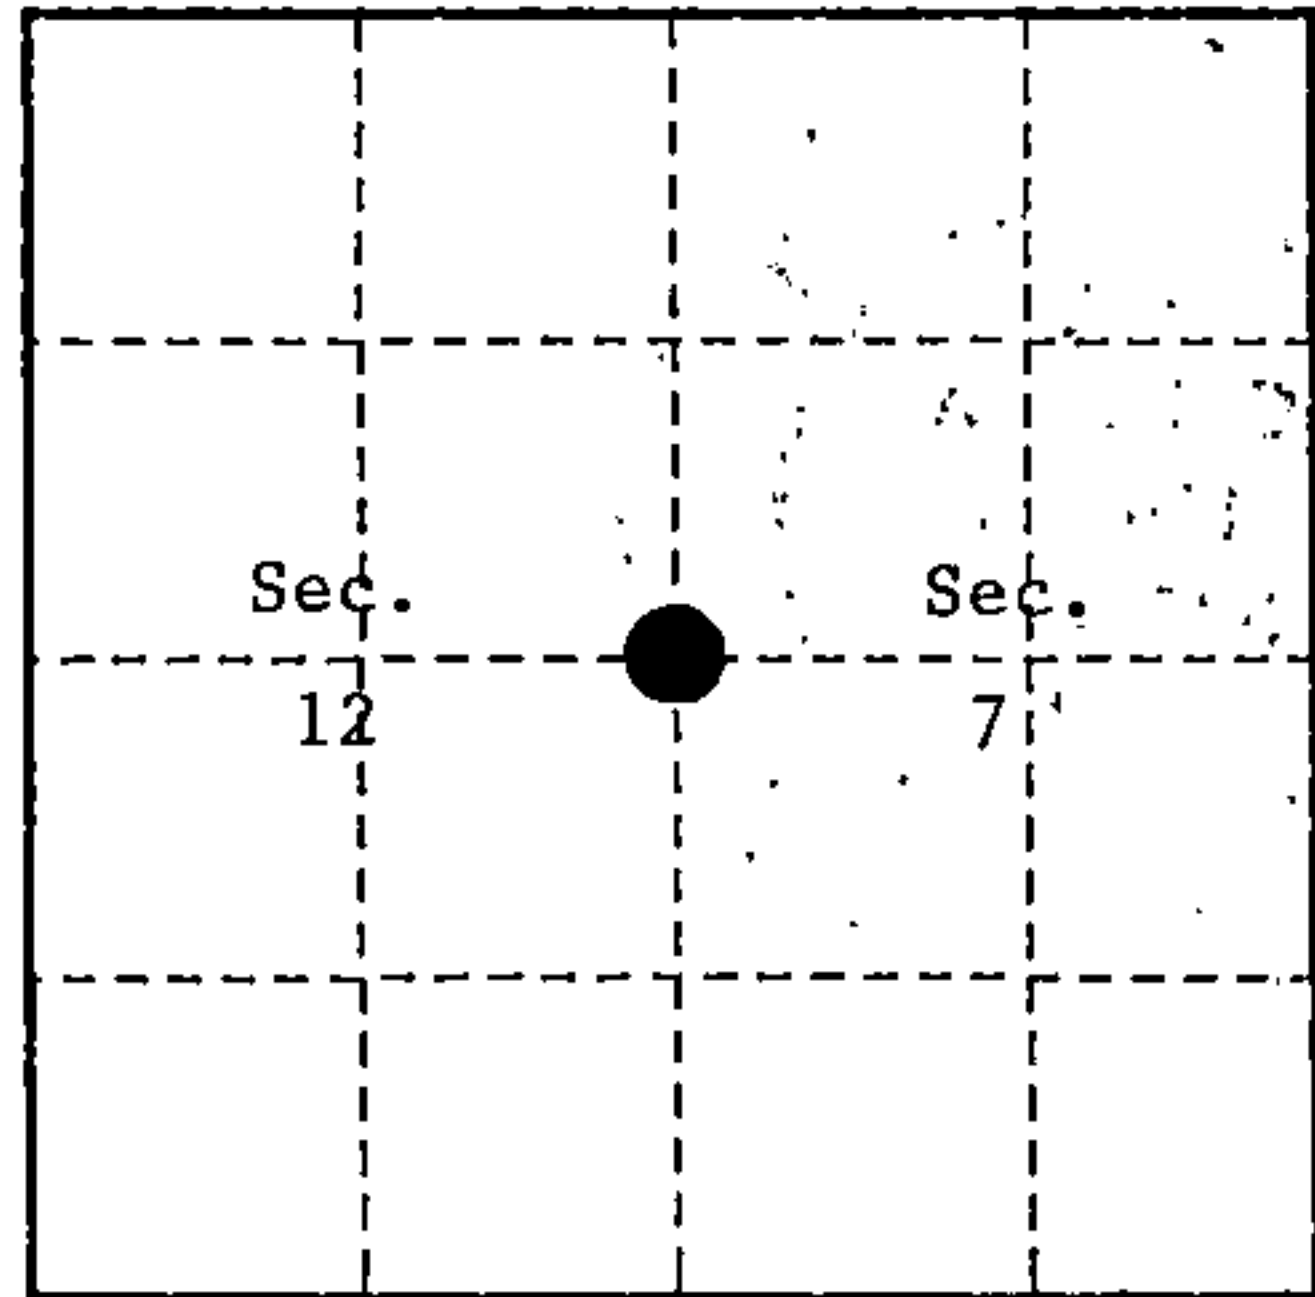

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1857 - Artemis Curtis set 1/4 post and made the following B.T.S.: Tamarack 16" S18°W 26 lks (17.16'), Tamarack 16" N38°E 48 lks (31.68')

In 1927- Goodman Co. found 3" cedar post in swamp and set 30" flue pipe and dead cedar 8" S45°W 13 lks (8.58').

In 1933 - J. Jenkins, set 4" iron post for 1/4 corner along side wood post.


In 1998 - Alan Harrison, R.L.S. found Marinette Co. monument tipped over with wood post along side. Set new monument and sign posts as below in middle of dead beaver flowage.

REGISTER'S OFFICE  
Forest County, Wis.  
Received for record this 24<sup>th</sup> day  
of March A.D., 1999 at  
1:15 o'clock P.M. and recorded  
in Vol. CORNER RESTORATION  
page 6-25  
Christi Ehling  
Deputy Register of Deeds

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

- 1.) 2 1/2" x 60" aluminum monument stamped with corner location.
  - 2.) Steel sign post North 0.50 feet.
  - 3.) Steel sign post South 0.50 feet.
- No other references within 250 feet.

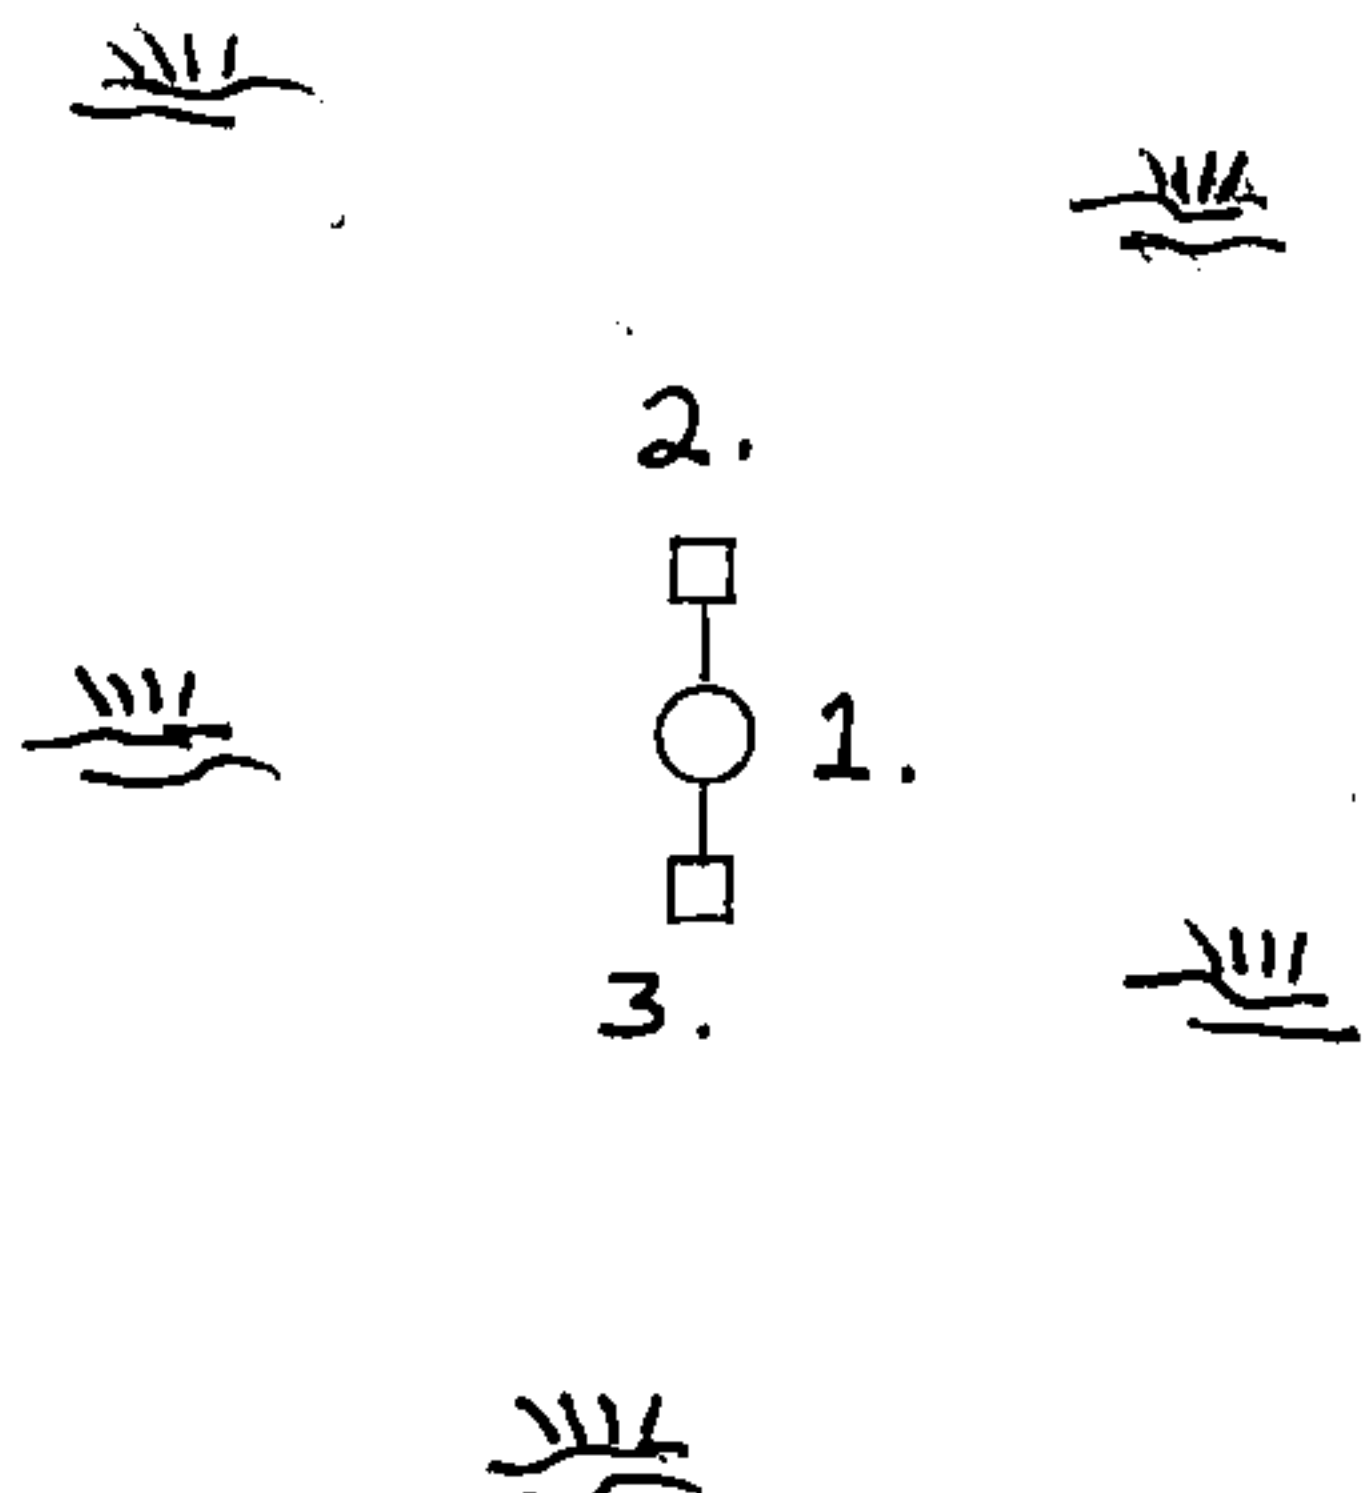

43516 12 2000

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

2) a found perpetuated location

(g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

no

(1) ALAN D. HARRISON

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison

Signature

Date

12/23/98

CERTIFICATE READY FOR FILING:

Edward

District Ranger

