




## U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following hine elements (a through 1).

(a) Identify the corner by reference to the U.S. public land survey system. O . Corner monument restored.

Section Corner Common to Sections 7, 8, 17 and 18, Township 37 North, Range 16 East, Forest County, State of Wisconsin.

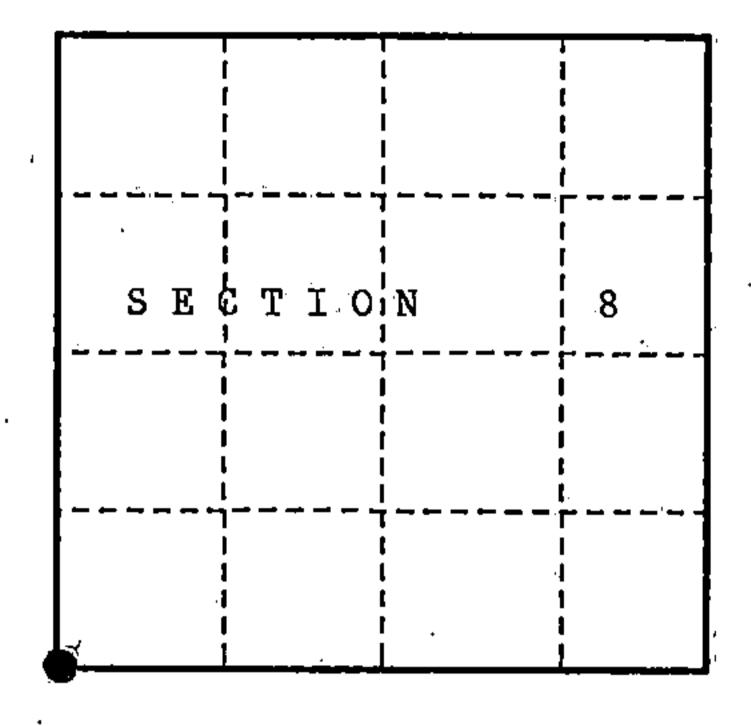

(b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1859, James McBride set a wooden post at the corner and selected the following corner references: 8" N10°E 8 1ks. Tamarack, Tamarack 12" S55°E 30 1ks. S46°W 27 1ks. Tamarack Tamarack 10" N22°W 39 1ks.

In 1982, Kim Pritzlaff restored the corner by using the GLO river calls and set a 2" dia.

driveable Bernstein monument. Selected the following corner references: S84°E Tamarack 23.17 ft. 4" S45°E Spruce 50.28 ft. Spruce N21°E 26.70 ft. Tamàrack 4" N28°W 51.90 ft.

SSP 1.0 ft. West

In 1990, John Schulke recovered monument in place and the following corner references: Dead Spruce S45°E 50.28 ft. Tamarack S85°E 23.18 ft. Dead Spruce N21°E 26.70 ft. Tamarack N28°W 51.70 ft.

SSP W-SW · 1.2 ft.

The following new corner references: Tamarack S27°W 33.05 ft. S25°E Tamarack 40.25 ft.

In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, If the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, Iron orother equally durable material.)

(d) Show a plan view drawing depicting the relevent monuments and reference tles which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed.

1. 1721 dia. driveable alum. monument stamped to identify the corner.

., 5<sup>11</sup> Tamarack S85°E 23.18 ft. 3. N28°W Tamarack. 51.70 ft.

S27°W 33.05 ft. Tamarack

Tamarack S25°E 40.25 ft.

6. SSP W-SW 1.2 ft.

REGISTER'S OFFICE Forest County, Wis. Received for record this of Lecember A.D., 19. 20 at 8:45 o'clock AM, and recorded In Vol. Corner Kesteration

43716070000

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness manuments shown on the drawing in (d), above.

NONE;

. (f) Was the corner restored through acceptance of (l) an obliterated evidence location, or, (2) a found perpetuated location?

(2) found perpetuated location.

(g & h) Was the carner reestabilished through lost carner proportionate methods? It so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No.

JOHN C.
SCHULKE
S-1965
LUDINGTON

(1) John Schulke (Register Land Surveyor)

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

John Lehulke

10/23/90

Date

CERTIFICATE READY FOR FILING:

District Ranger