

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).


- (a) Identify the corner by reference to the U.S. public land survey system.
 O = Corner monument restored.

1/4 Corner to Section 24, T.36 N., R.14 E.
 and Section 19, T.36 N., R.15 E. of the
 4th Principal Meridian, Wisconsin.

REGISTER'S OFFICE
 Forest County, Wis.

Received for record this 22nd day
 of Sept. A.D., 1986 at
10:20.0 o'clock A.M. and recorded
 in Vol. CORNER RESTORATIONS
 pag. P-25

Paul A. Schaeffer
 Register of Deeds

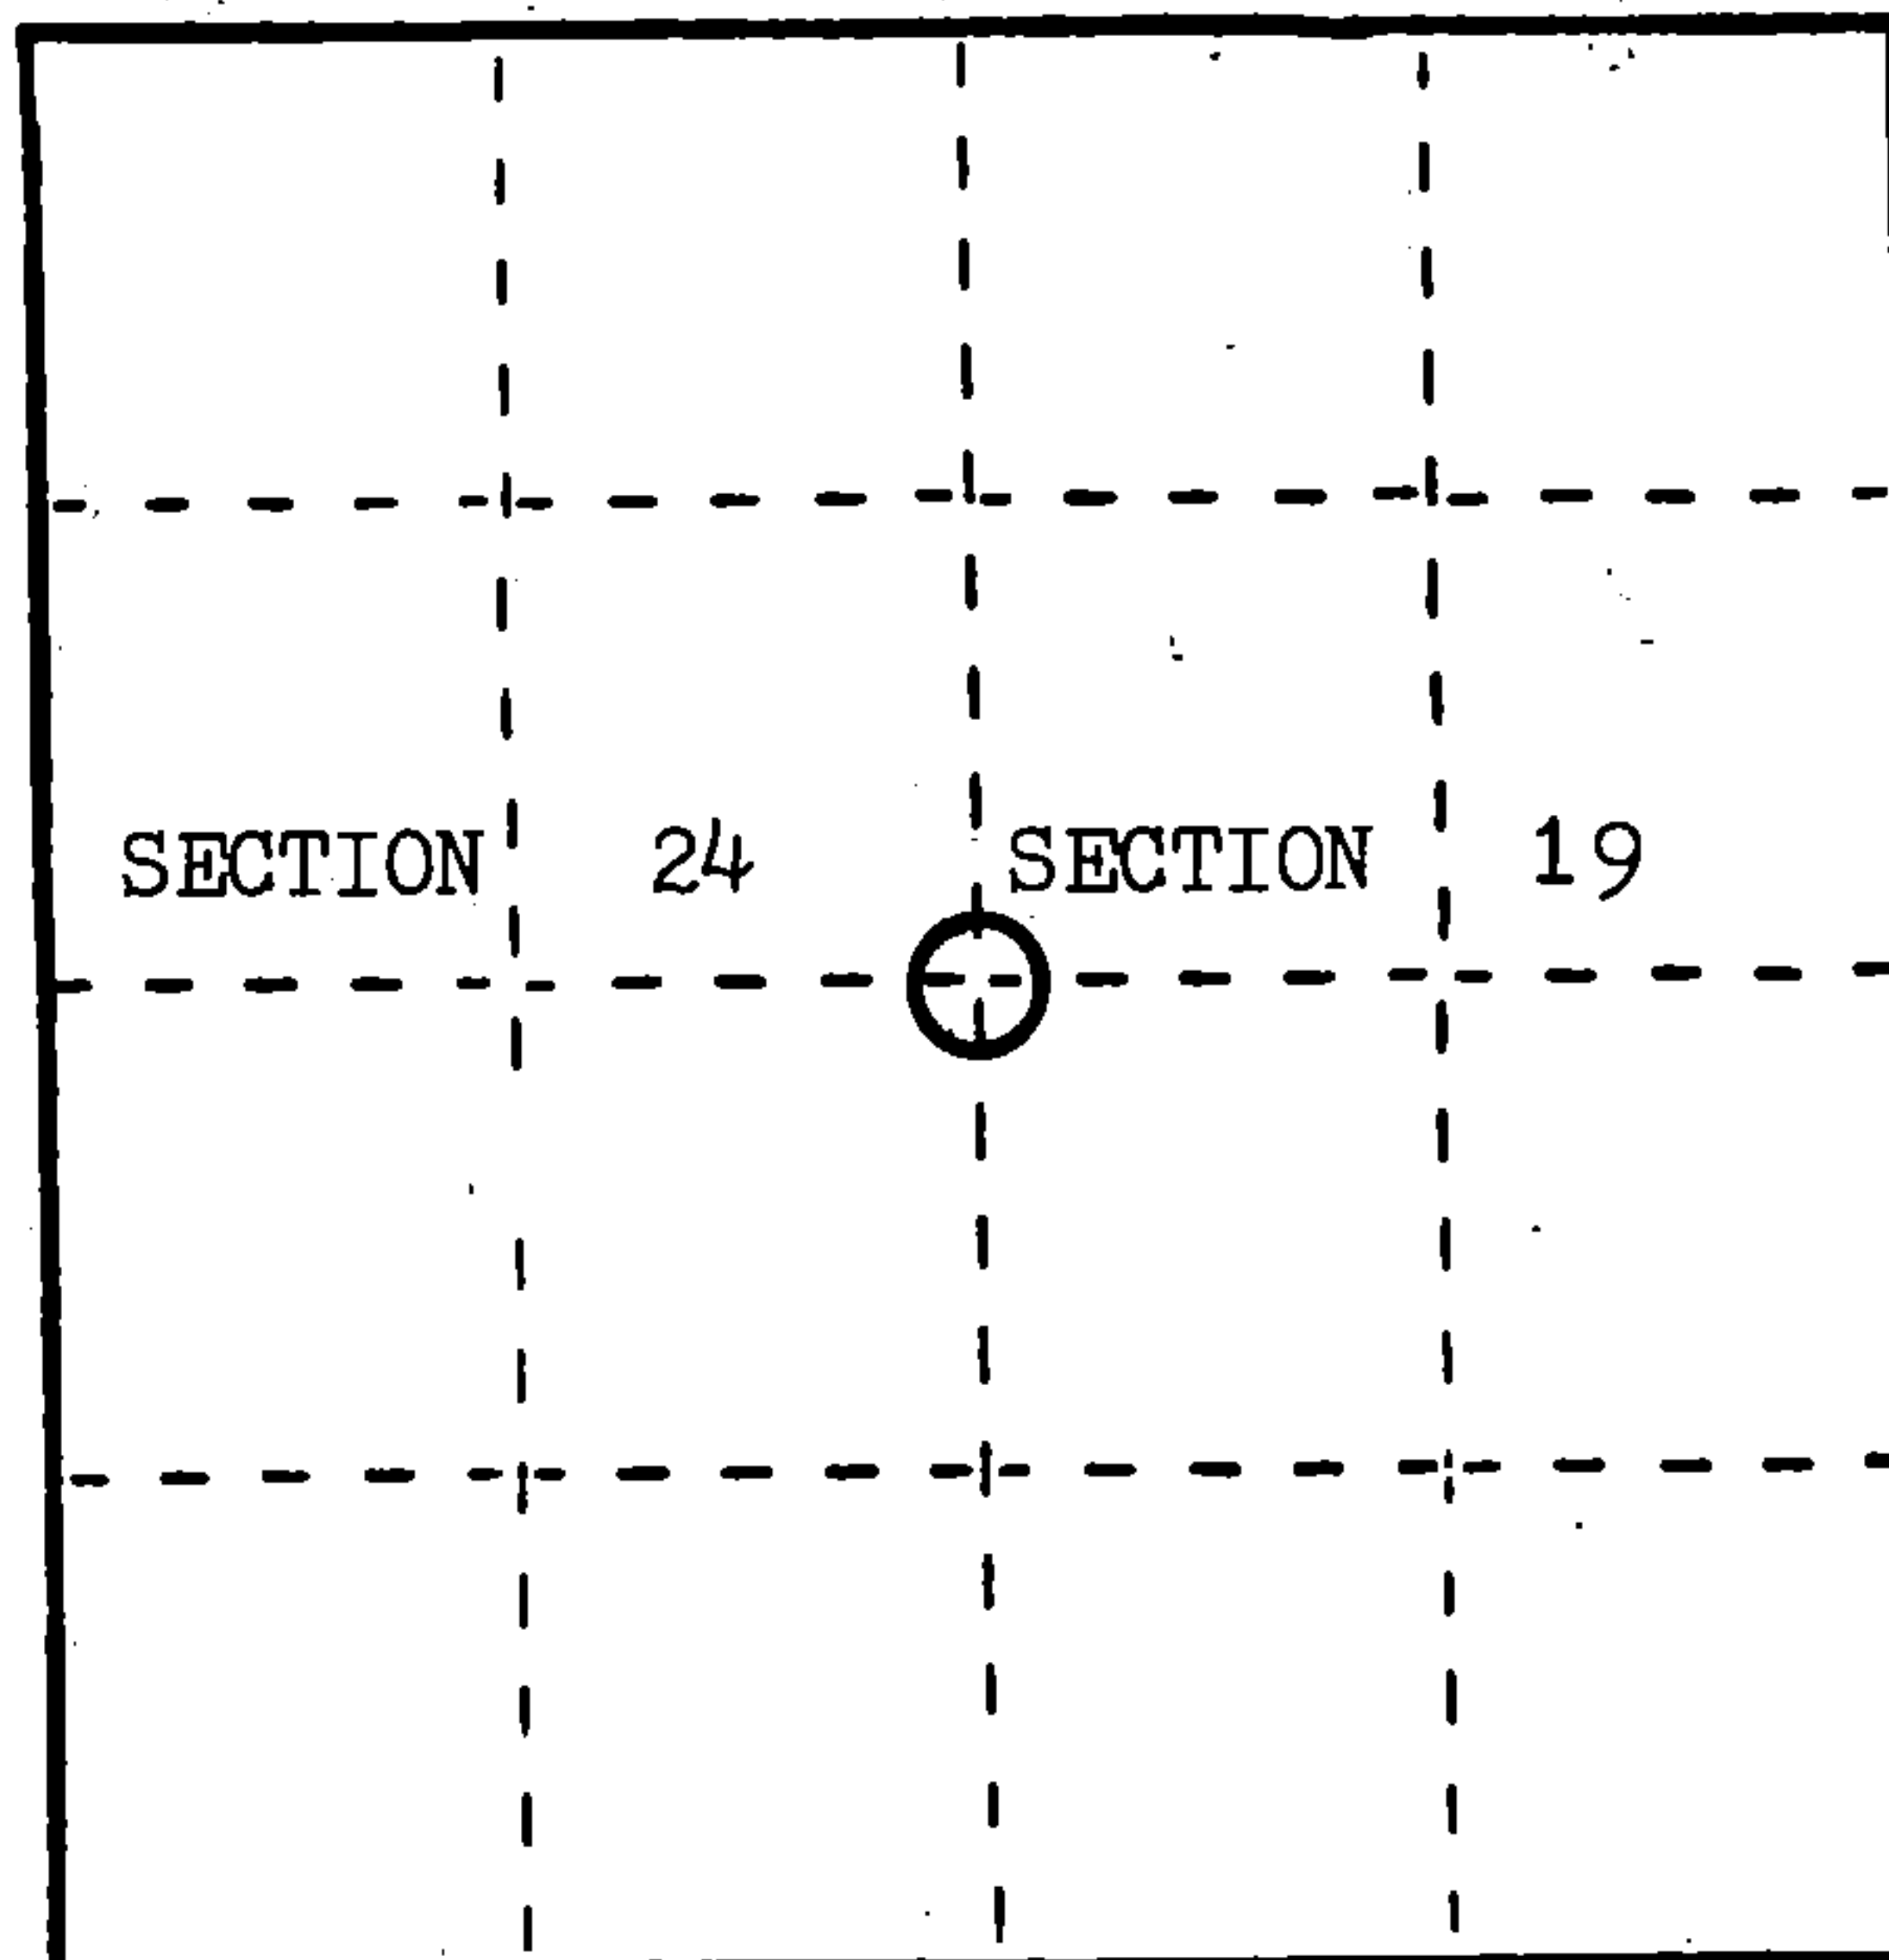

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1859 James Mc Bride set a wood post and marked B.T.s as follow;
 Cedar 6" S.48 W. 14 lks., Spruce 7" N.83 E. 21 lks.

On Oct. 25, 1985 I spoke to Frank Mohr and Bob Mentz, both long time residents of this immediate area. They both stated that this corner was located in the center of the old N.- S. highway, opposite an old fence corner east of the road; They both stated that during the 1950s the road had been rebuilt and that this part of the road had been mucked out to remove mud under the roadway. Mr. Mohr showed me the old fence corner east of the road and I found a 1 1/2" iron pipe witness corner in the fence corner. I later measured from this iron pipe 100.0' west to the center of the old road, set a temporary point and dug up road with a backhoe to check, I found that the road had indeed been mucked out and refilled.


- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)
 Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

In 1986 I set a Rail Road Spike at my temporary point, buried under surface of roadway; I accept this position as the best evidence of the corner location and referenced as shown below.

1. 1/4 Corner
2. 1 1/2" iron pipe east 100.0'
3. W.C. 2" Aluminum Pipe with cap S.87-07.2 W. 40.0'
4. B.T. W.Birch 8" N.77 E. 54.7'
5. B.T. Maple 4" S.87 E. 45.0'
6. B.T. Balsum 6" S.40 E. 65.4'

N
A

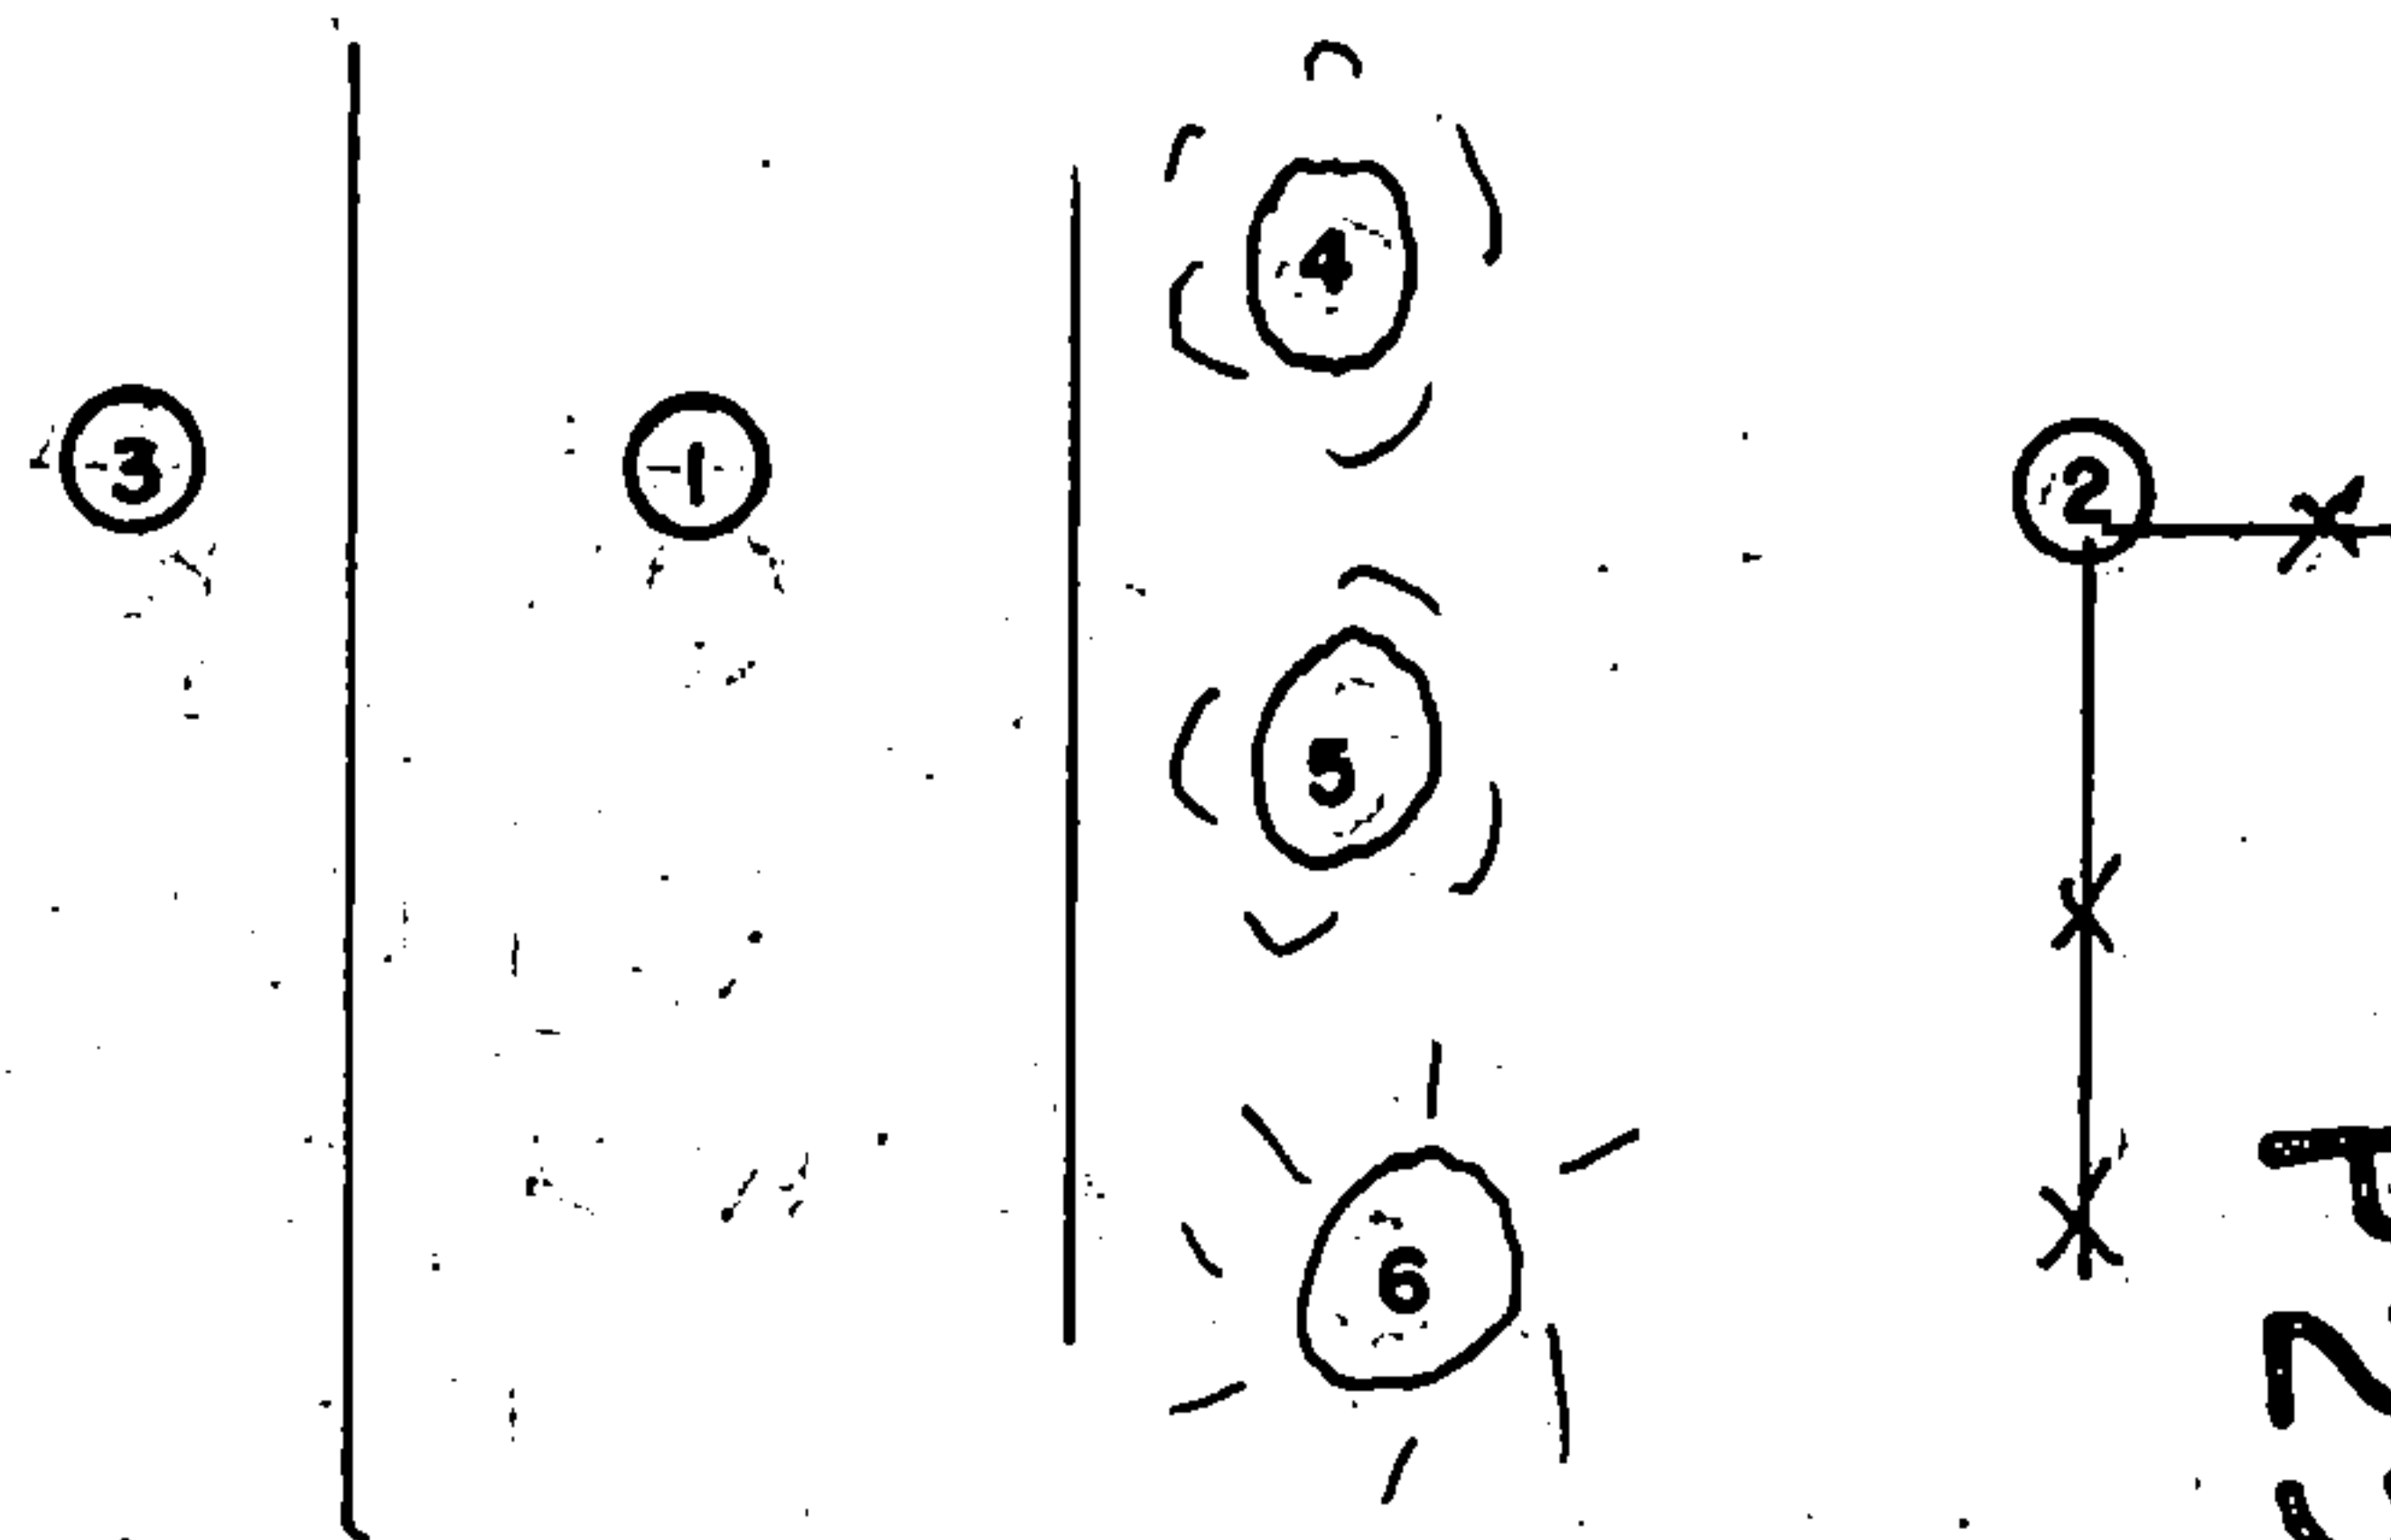

- (e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

none


- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

center of old roadway and old fence corner and W.C. 100.0' East.

- (g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

no

Affix Land Surveyor Seal

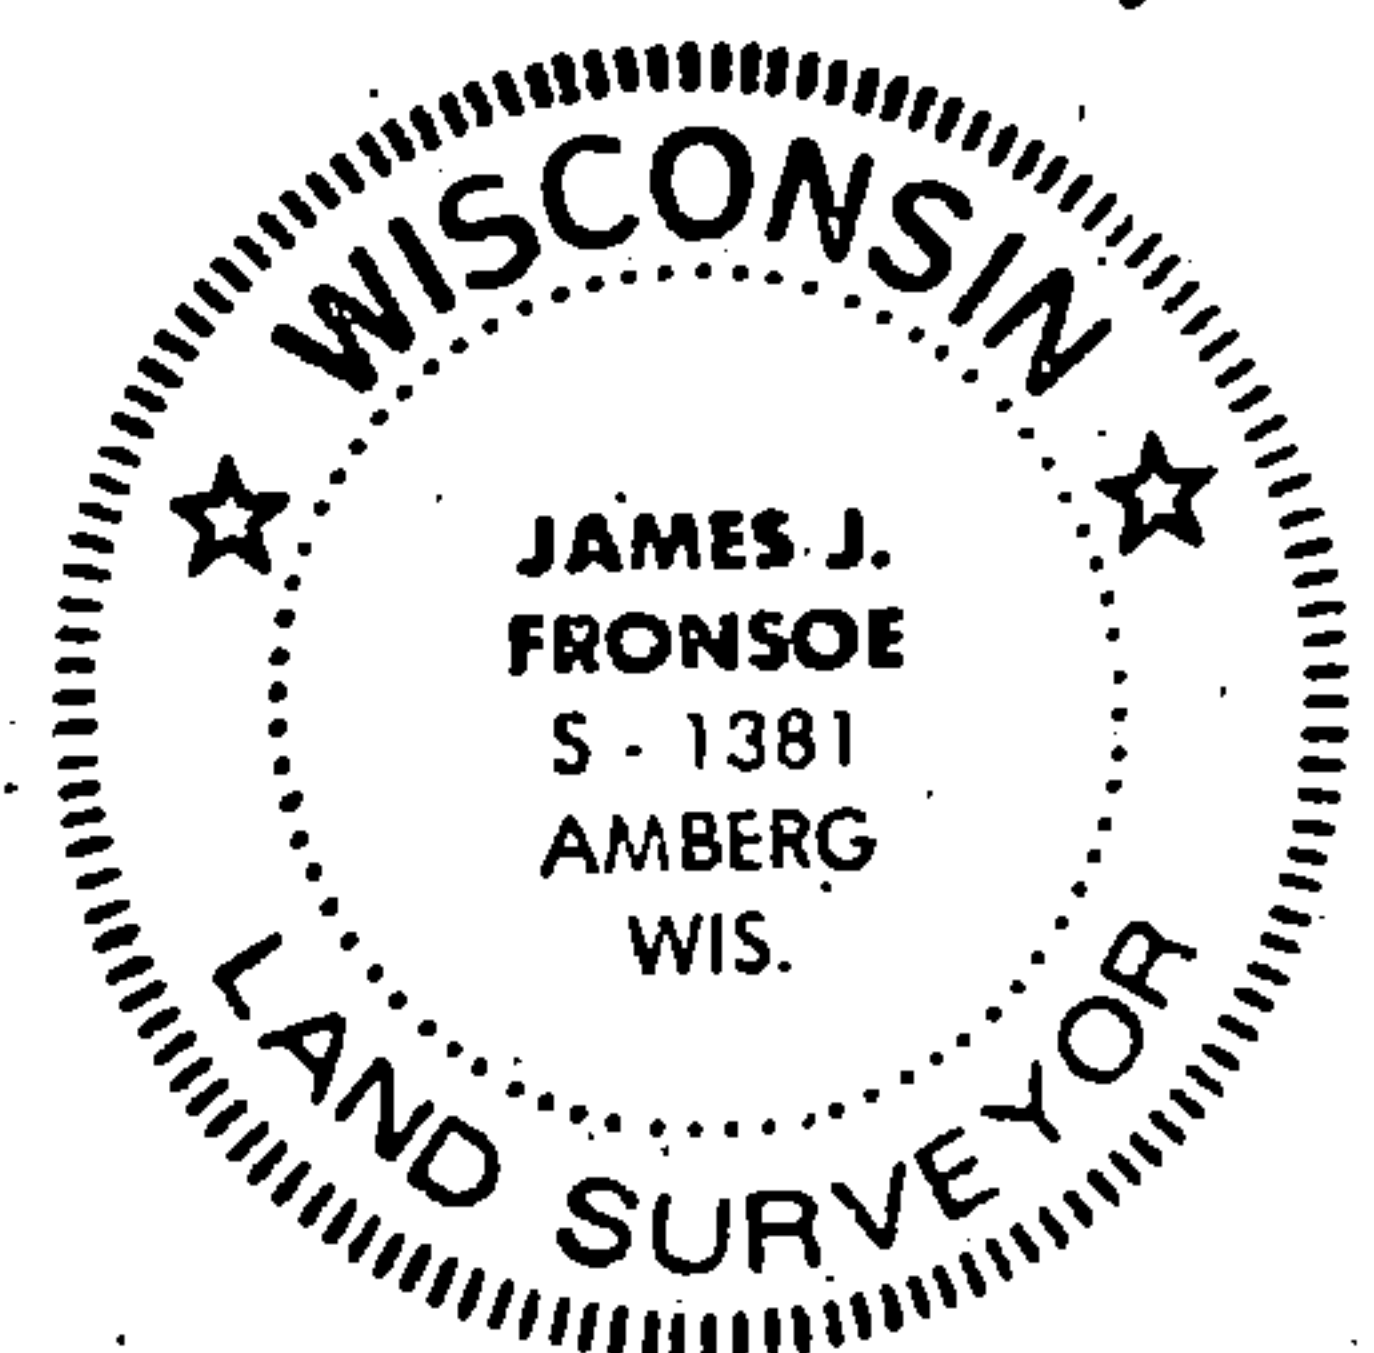

- (i) I, James J. Fronsoe, R.L.S.
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

James J. Fronsoe, Sept. 1986

Date