


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
○ = Corner monument restored.

Township corner to Section 36, T.37N., R.11E., Section 1, T.36N., R.11E., Section 6, T.36N., R.12E., and Section 31, T.37N., R.12E., Forest and Oneida Counties.

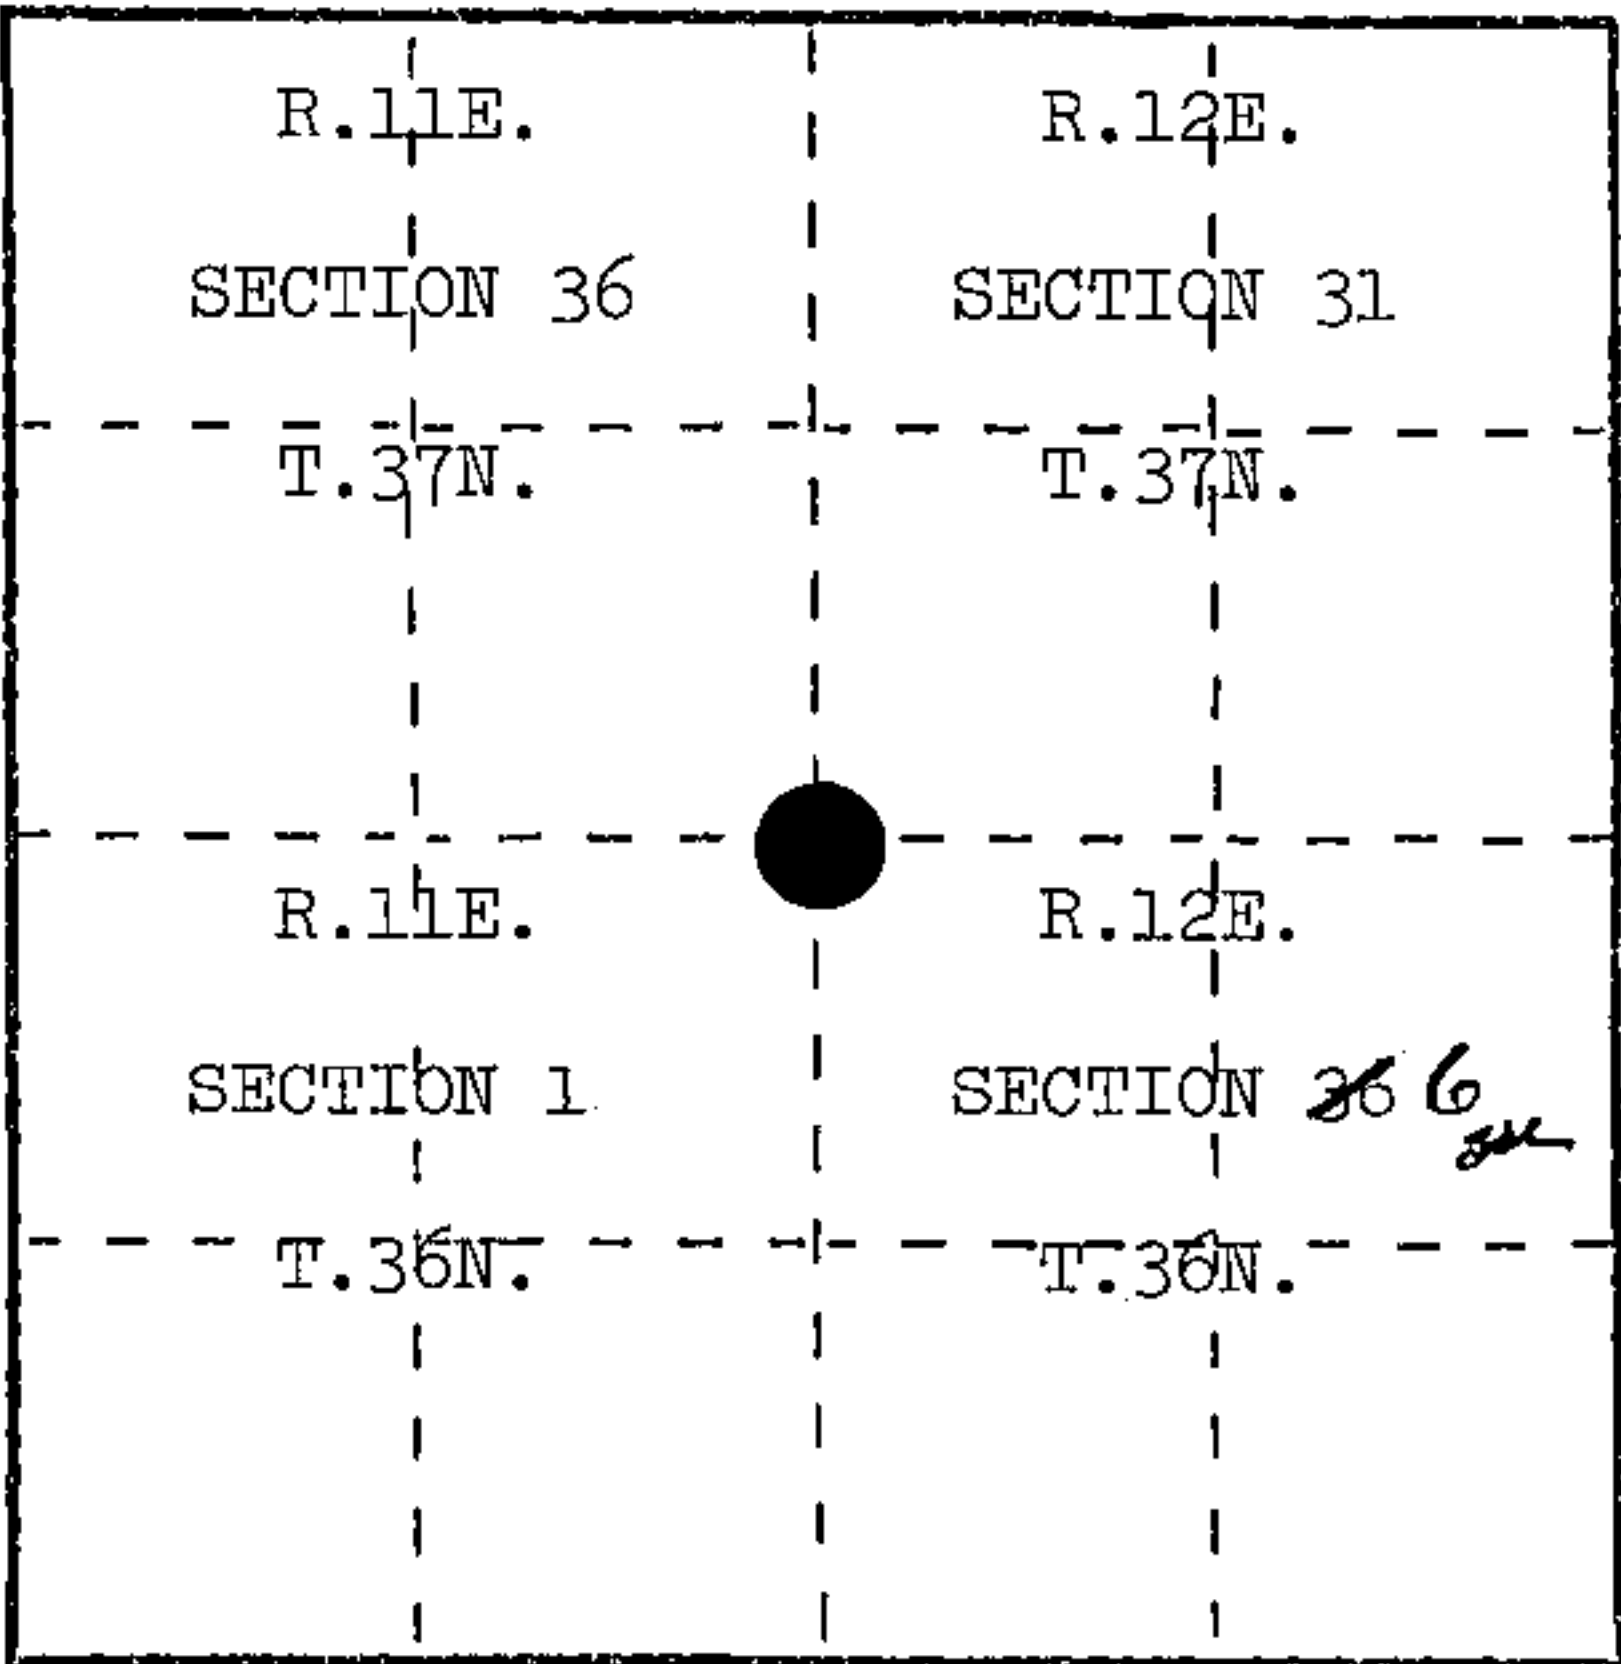

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

Monument found in place--a brass cap on a 2" galvanized iron pipe, as set by M. Maine, Oneida County Surveyor, September 5, 1935.


In 1858, Alfred Millard set wood post with the following BTs: Yellow Birch, 14", N.70°W., 41 links; Elm, 16", N.50°E., 218 links; Yellow Birch, 16", S.30°E., 48 links; Sugar, 18", S.50°W., 8 links.

9/5/35, V. M. Main, Oneida County Surveyor, set County Monument and made new BTs as follows: Hemlock, 12", N.46°E., 49 links; Yellow Birch, 28", S.62°E., 79½ links; Hemlock, 7", N.55°W., 55½ links.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)
Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. Hemlock, 18", N.50°E., 33.65 feet
2. Sugar Maple, 8", S.69°E., 13.84 feet
3. Yellow Birch, 10", S.81°W., 17.19 feet
4. Sugar Maple, 7", N.20°W., 51.40 feet
5. Steel Sign Post, East, 3.40 feet

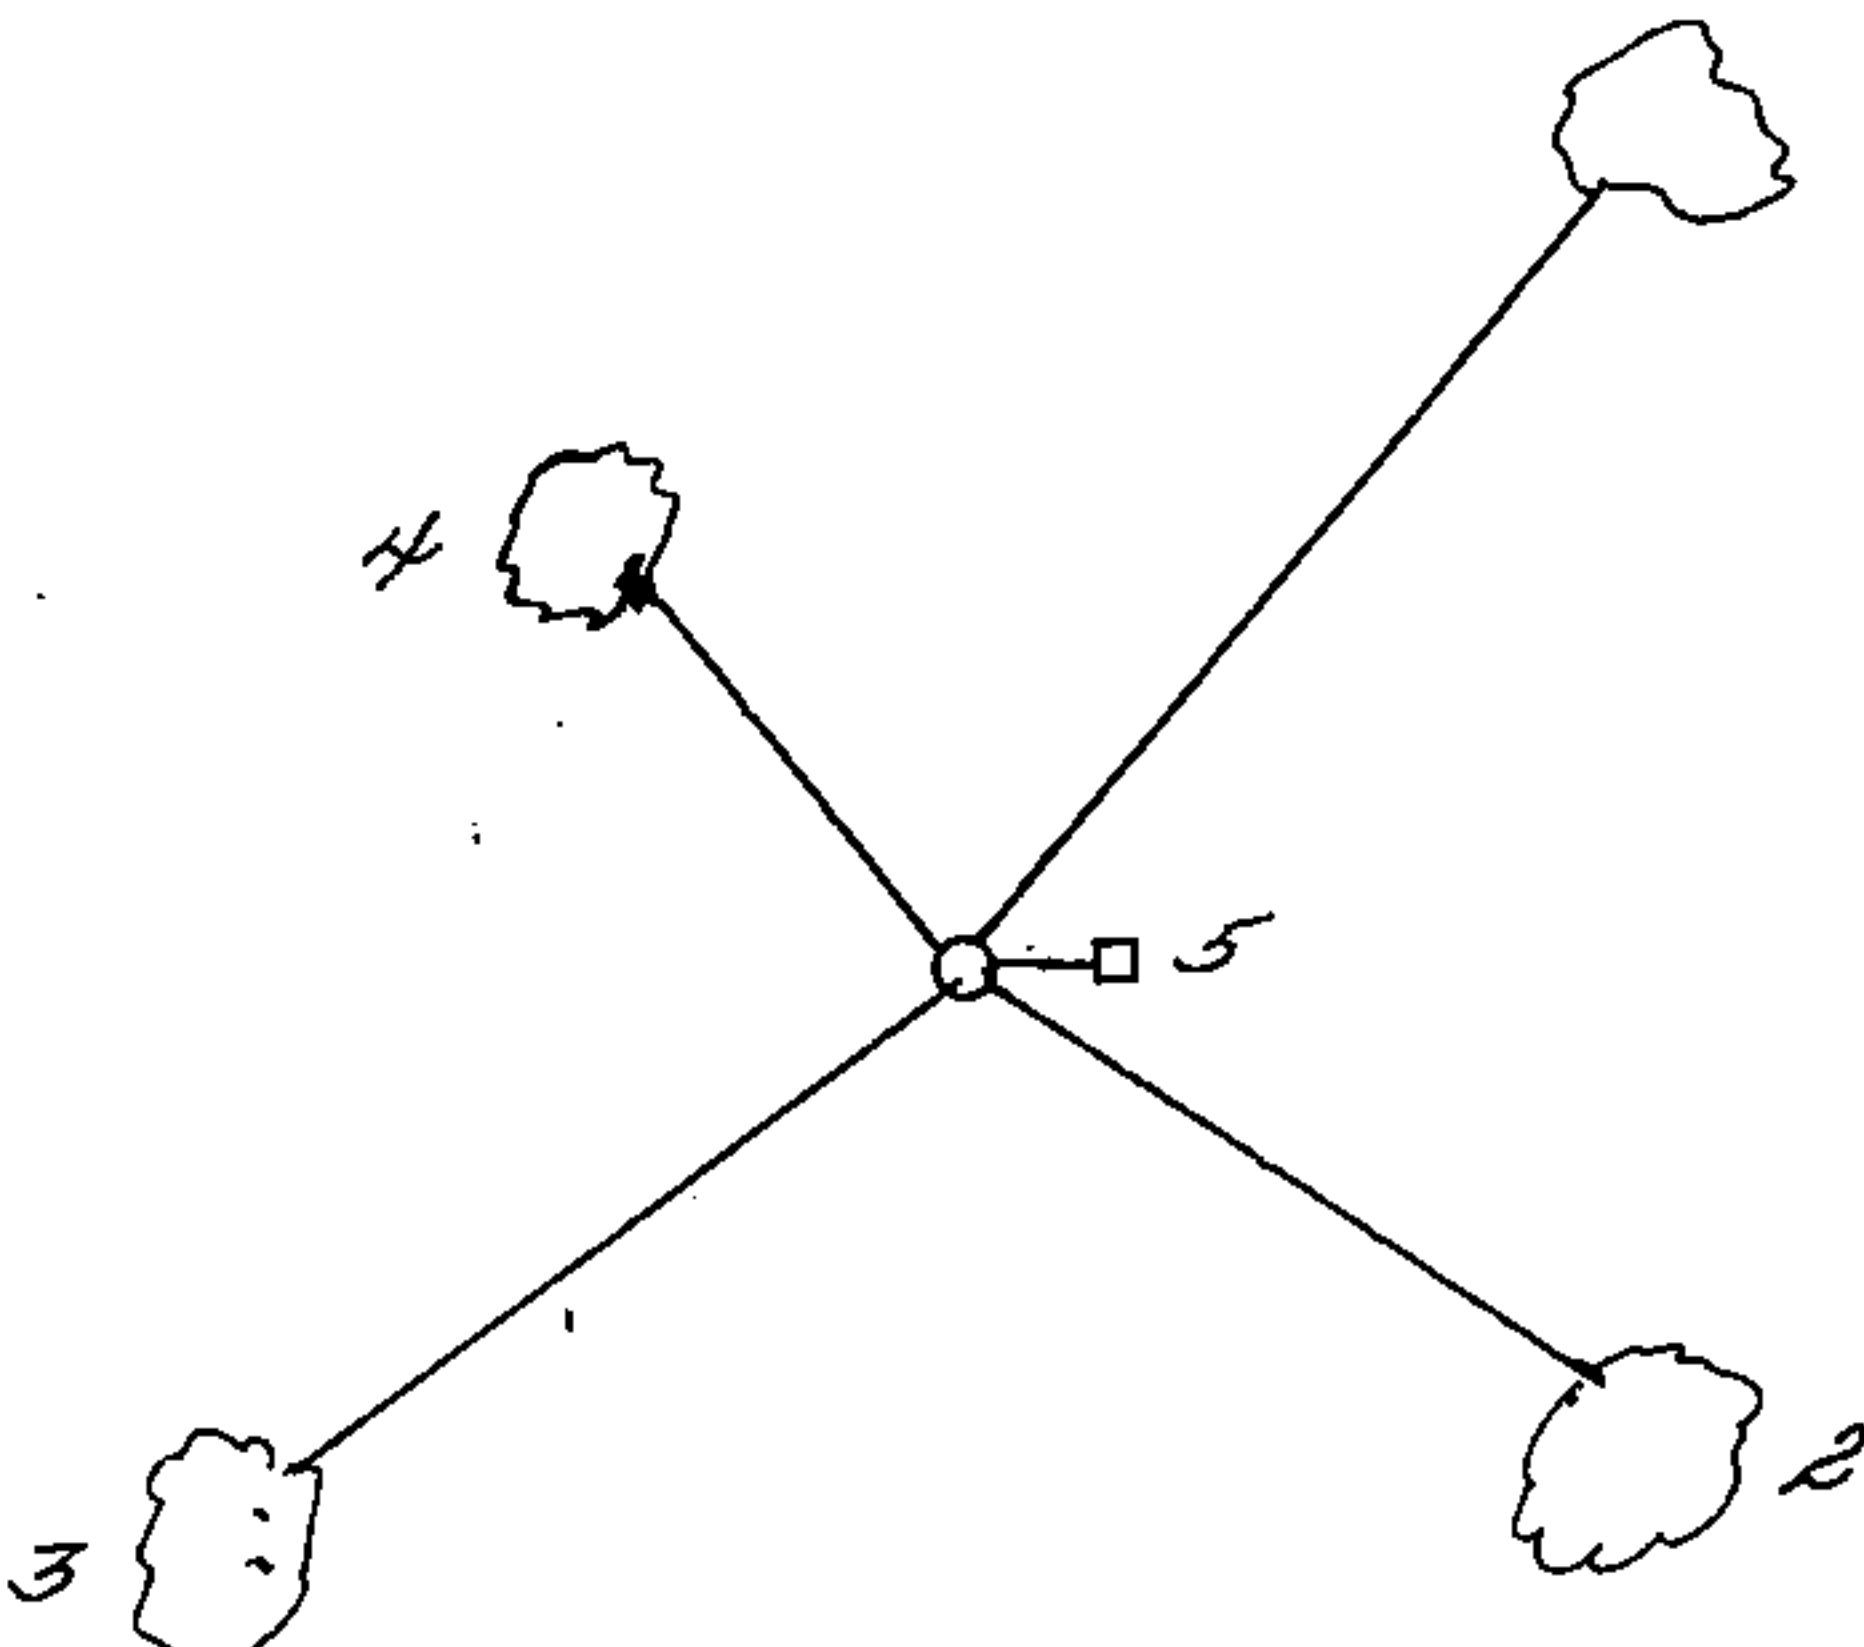

REGISTER'S OFFICE }
Forest County, Wis. }
Received for record this 11th day
of July A.D., 1985 at
3:15 o'clock P.M. and recorded
in Vol. CORNER RESTORATIONS
page 2-1
Paul Aschmussen
Register of Deeds

-Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

A found perpetuated location.

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

(i) I, Milo E. Stefan

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Milo E. Stefan
Signature

3/22/84
Date

Affix Land Surveyor Seal





CERTIFIED LAND CORNER RESTORATION

Index No. **A 1**

State of Wisconsin }
County of Forest } ss.

I Philip T. Hansen, do hereby
certify that on the 6th day
of December, 19 74, I found
evidence of the Section
corner of 1-36-31-6
Township 36 & 37, North, Range
11 & 12 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

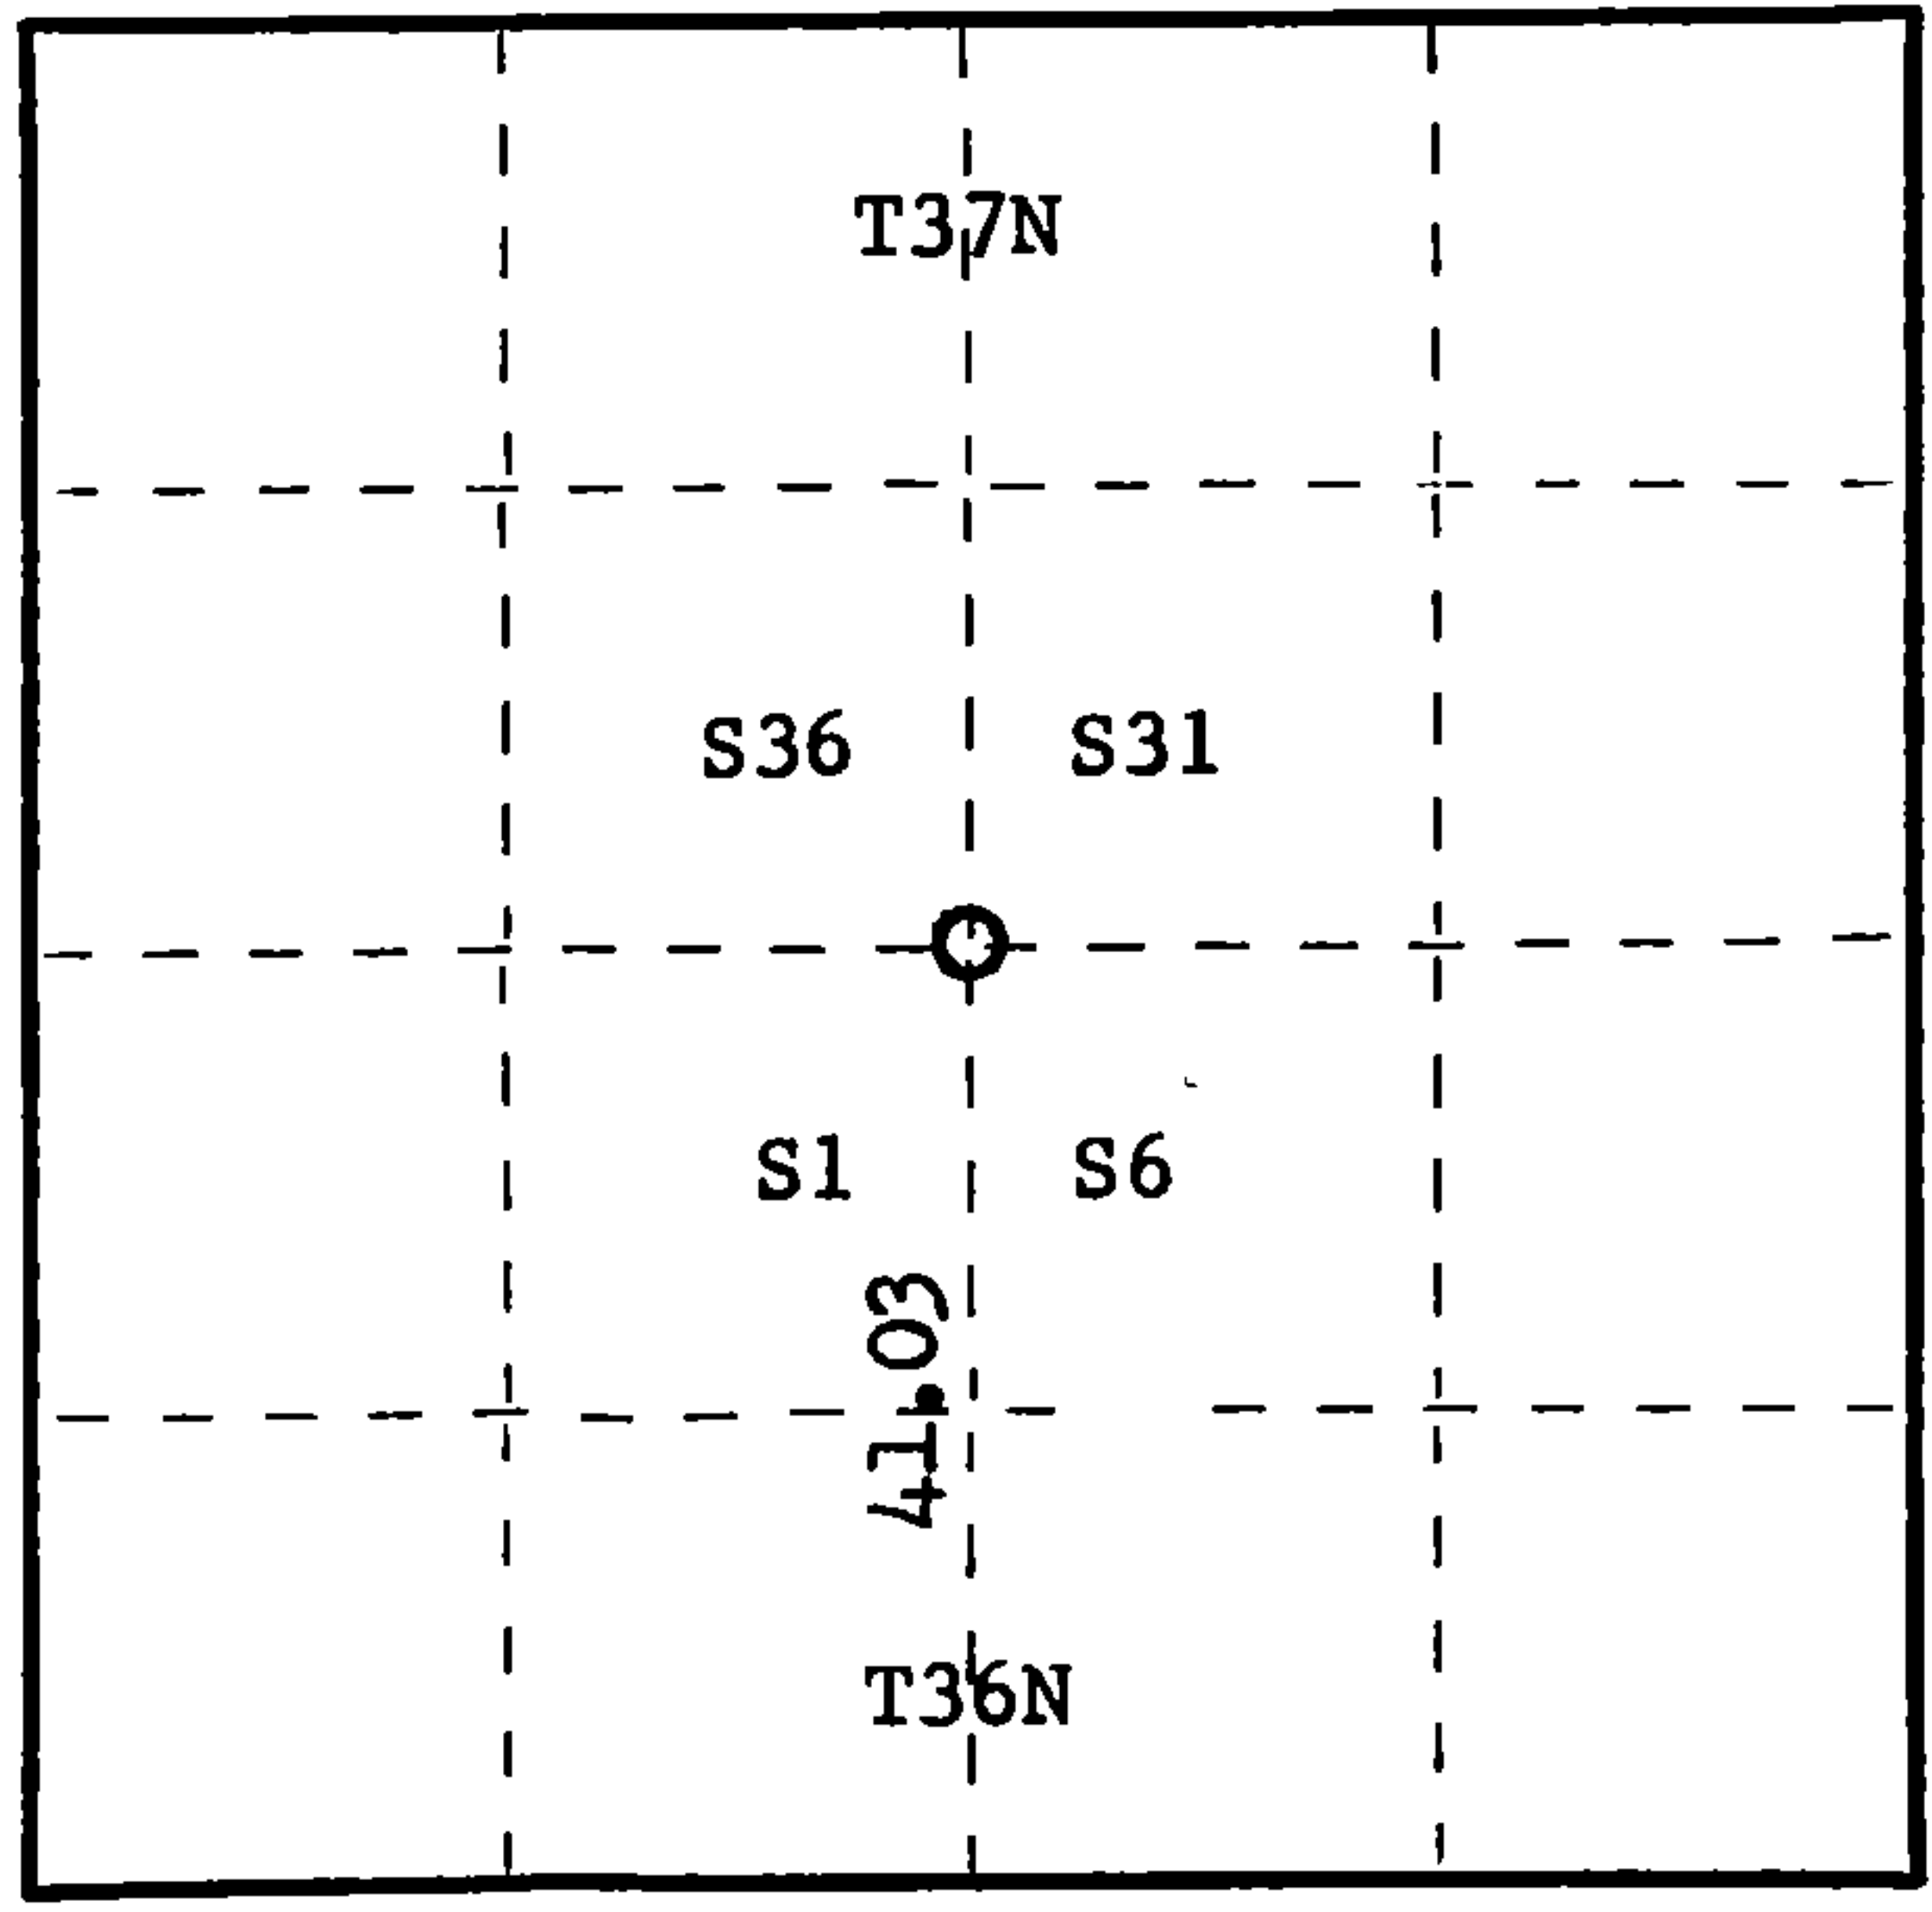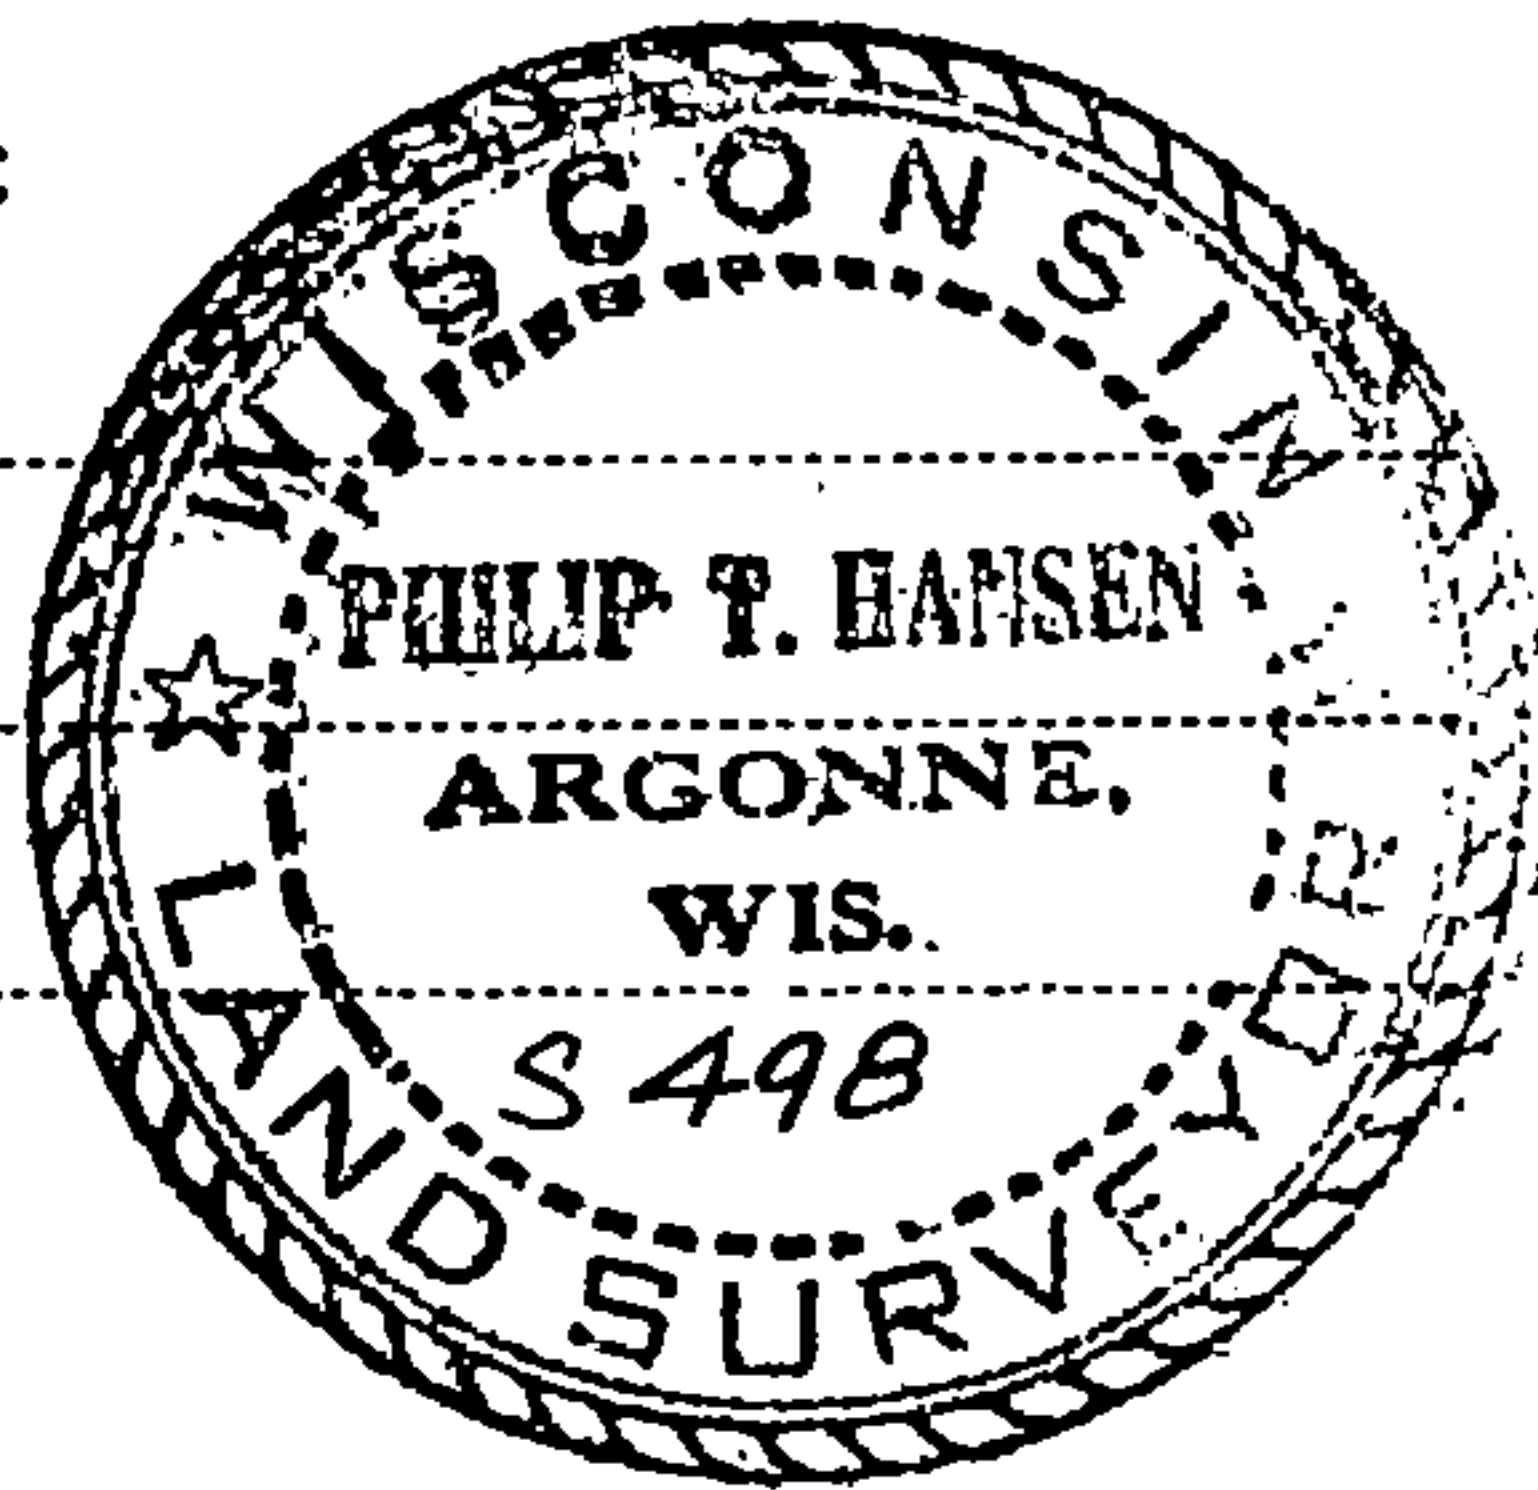

○ = Corner monument restored.

History of original corner establishment:

Original corner established by William E. Dougherty, Government Deputy Surveyor, in 1859.
Yellow birch 14" N70W 41 links
Elm 16" N50E 28 links
Yellow birch 16" S30E 48 links
Sugar 18" S50W 8 links

Resurvey by V.M. Maine, Oneida County Surveyor. Replaced recovered original corner with iron pipe with brass cap - good condition.

Retracement survey by H.C. Lawrence, 1950. Placed a new 4" hemlock post at corner.

Description of corner evidence found:

Recovered a 2-1/2" iron pipe with screw on brass cap with mound of rocks piled around it. 6" ironwood with Conservation Dept. location tag and U.S. Forest Service tag attached to it. Brass cap stamped as follows:

Recovered B.T.'s	Elm stump	N50E	28 links badly decomposed	R11	T37N	R12
	Hemlock 20"	N51E	49 links scribed S31 B.T.		S36 S31	
					S1 S6	
					T36N	

Description of monument and accessories I established to perpetuate the original location of this corner.

Blazed and scribed new B.T.

Yellow birch 11" S82W 25 1/2 links scribed S1 B.T.

Dated at Argonne, Wis., this 30th day of December, 1974

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Forest, I hereby certify that the within
instrument was filed in this office for record on the 17th day of March, 1975
at 3:35 o'clock P. M. Document No. 106807

Eugene Stutzman
(Register of Deeds)
By _____ Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE

43711360000

SEE ALSO Z 1-737-R12


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
 O = Corner monument restored.

Township Corner to Section 1, T.36N., R.11E.
 Section 6, T.36N., R.12E.
 Section 31, T.37N., R.12E.
 Section 36, T.37N., R.11E.,
 4th P.M.

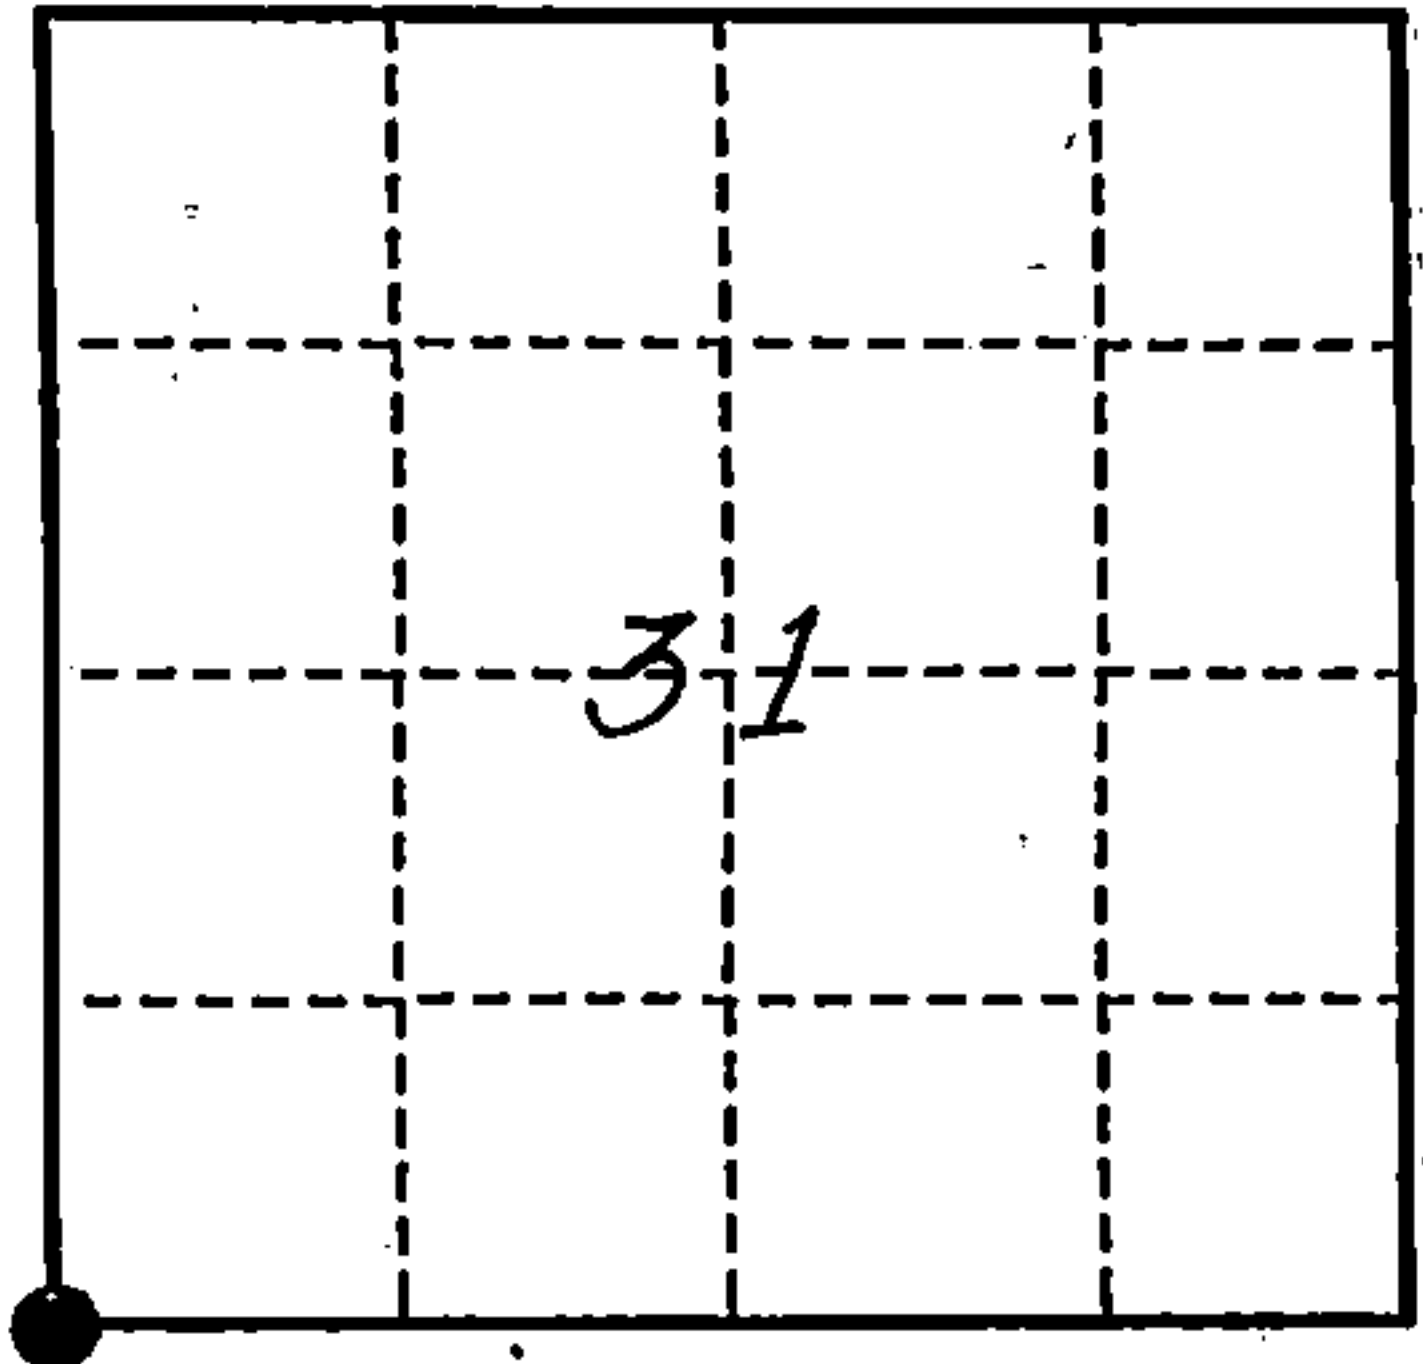

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.


2" Iron pipe 24" high with brass cap in mound of stone. Three BTs and steel sign post in good condition. Yellow Birch BT broken off and dead. - Made one new BT: Sugar Maple, 8", N.87°W., 24.05'.

This corner was restored by Oneida County Surveyor in 1937. Work was done by myself in 1985.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. 2" iron pipe/B.C.
2. Hemlock, 18", N.50°E., 33.65'.
3. Sugar Maple, 8", S.69°E., 13.84'.
4. Yellow Birch (dead), 10", S.81°W., 17.19'.
5. Sugar Maple, 8", N.87°W., 24.05'.
6. Sugar Maple, 7", N.20°W., 51.40'.
7. Steel sign post, East, 3.40'.

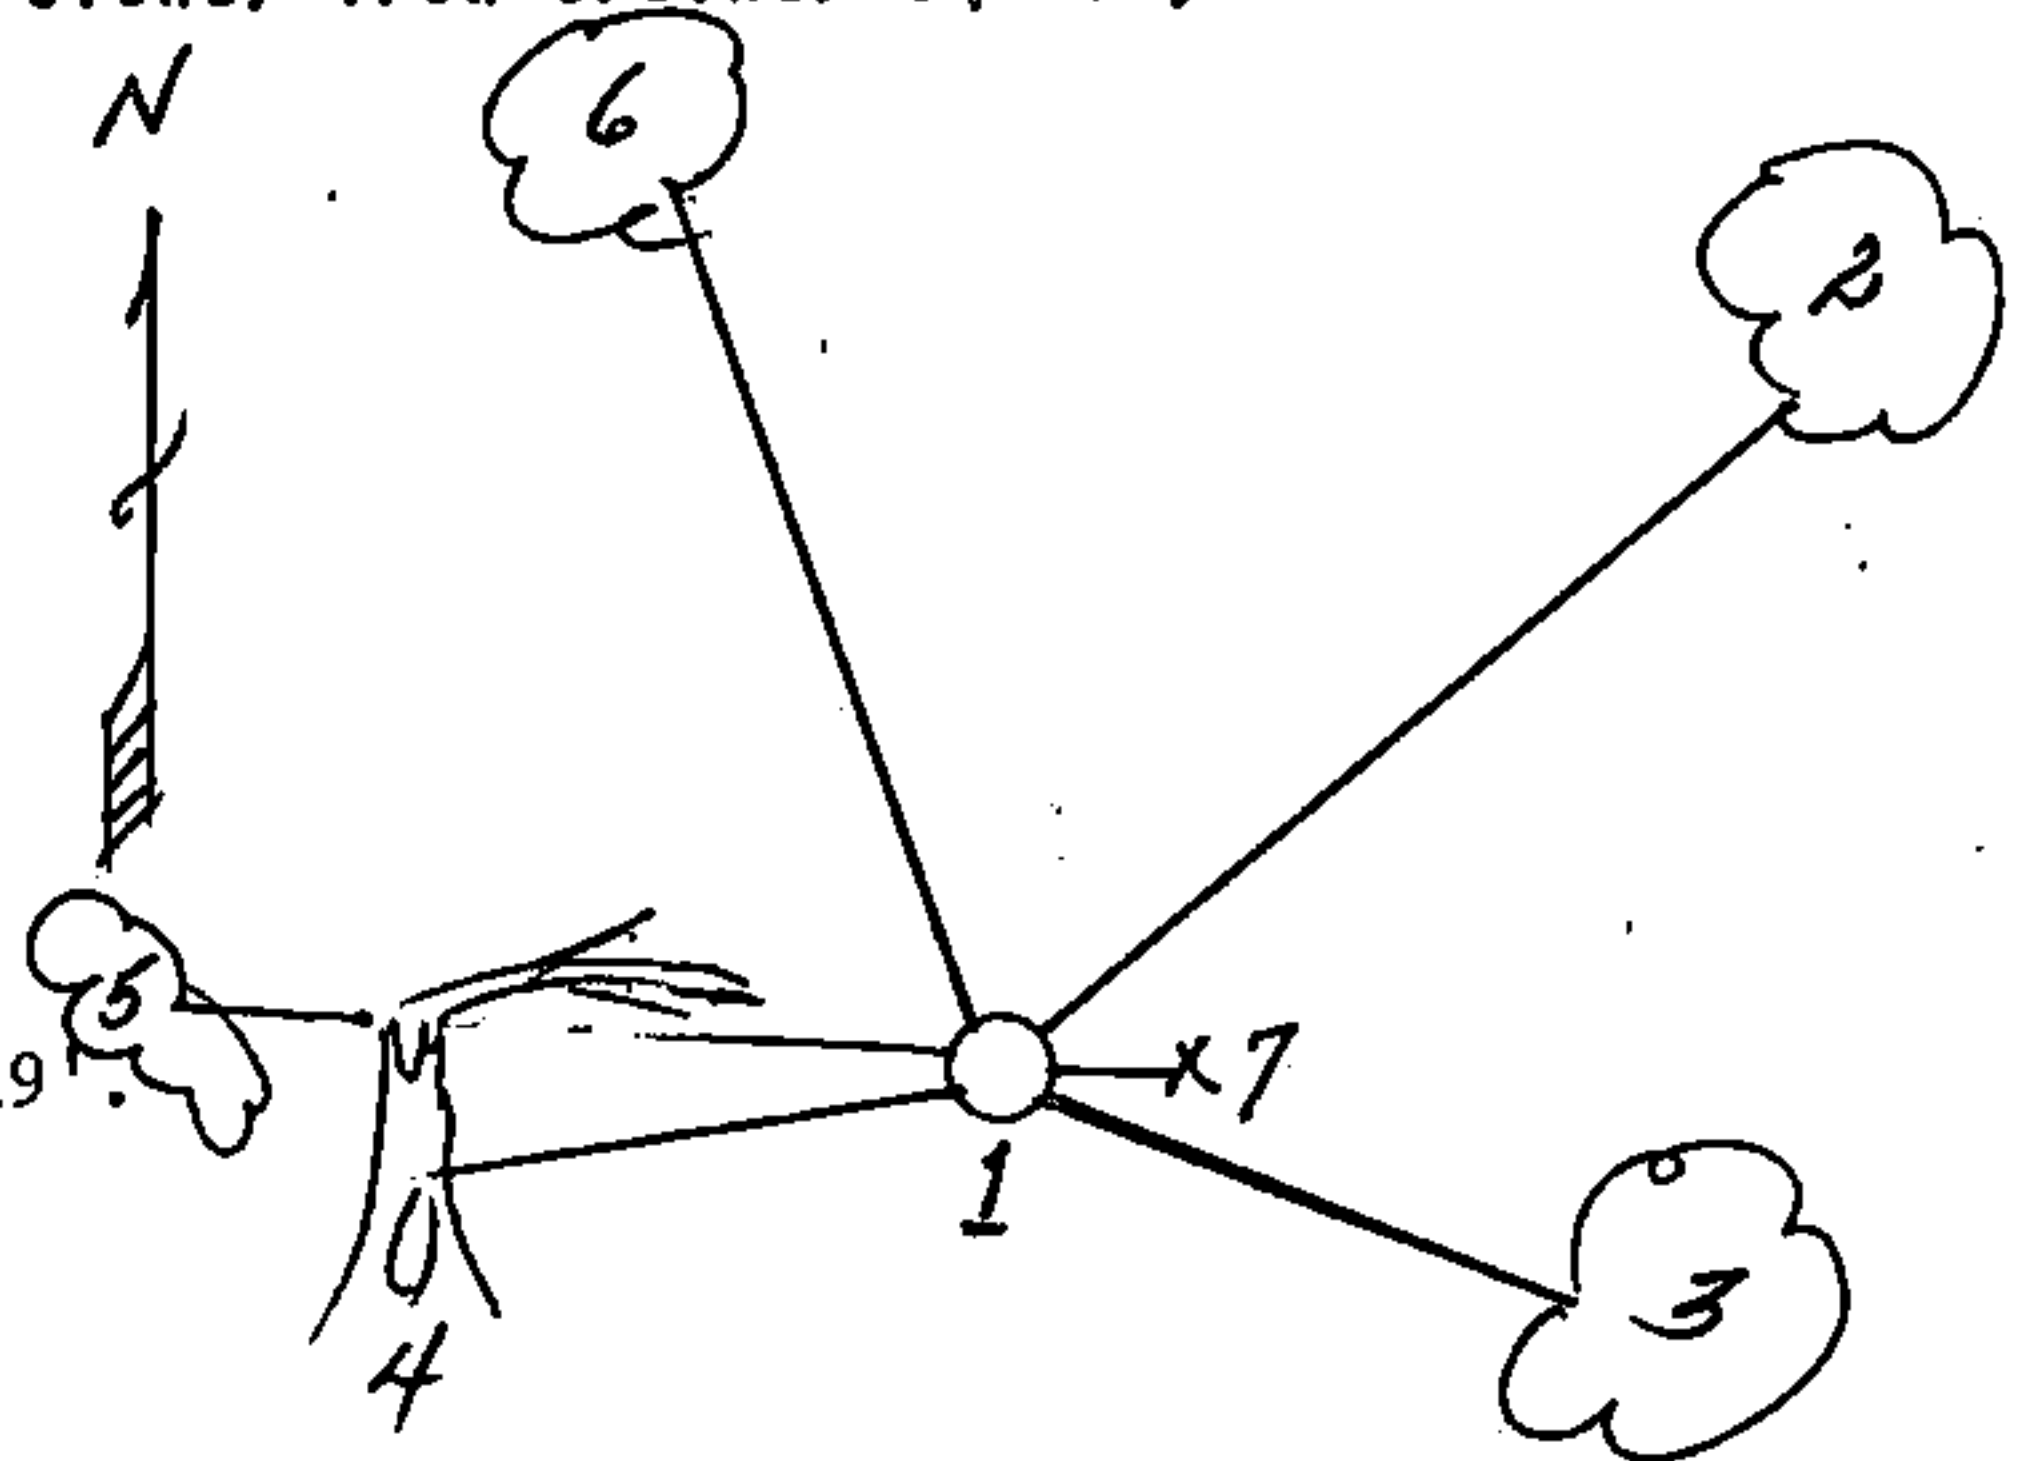

REGISTER'S OFFICE
 Forest County, Wis.

Received for record this 9th day
 of March A.D., 1993 at
9:15 o'clock A.M. and recorded
 in Vol. 3637-1112 Corner Restorations
 page 2-1
Paul C. Deery
 Register of Deeds

- (e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

N/A

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2)

- (g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

N/A

(1) I, Milo E. Stefan

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Milo E. Stefan
Signature

November 20, 1992

Date

CERTIFICATE READY FOR FILING:

Dale R. Covey
Acting District Ranger

