J-17

ŗ
CICKO
U
C
Ţ
MITMRED.
TIMENT

State of Wisconsin		original corner establishme	nt:		
County of FOREST	J The Orig	inal Government Surve	y of the subdivision of th	e township	
I John C. Schulke	do hocobu	in 1865 by J. L. Now		•	
certify that on the 14th	day Set a wor		llowing bearing trees:		
of June 19	CHUAL	14" N31°W 8" N20°E	20 lks.	DECICEUS A	Statestation)
evidence of the Section		8" N20°E	23 1ks.	REGISTER'S O Forest County	Wis.
corner of 10, 11, 15 and 14.					cord this
Township 38 Fourth Princip	——————————————————————————————————————				M. <u>a</u> nd recorded
as described hereon; and that from t		n of corner evidence found:		in Vol.Co.R.N.E.	RESTORATIO
I established a new monument and	d accessories			page	terla di
as described hereon to perpetuate	the original Found no	evidence		Registe	er of Deeds
location of this corner.					
Resident witnesses:					
Resident withesses.					
•	T	· 1	. T 145 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		
· · · · · · · · · · · · · · · · · · ·			ries I established to perpetuate the	_	ner.
			m pipe monument, 3 feet lo	•	
		_	luminum cap stamped: T38N 665. Established the foll		_
		eferences: Balsam	8" N58°E 20.94	_	-
	'	Twin Cher			•
	1	Birch	12" S61°W 20.68	ft.	-
1 1	1	Balsam	14" N11°W 34.31		
	<u>-</u>	Steel sig	n post Southwest 0.7	ft.	
1 1	1				
ISECTION	1				
	Dated at	Cable		v of	19.88
 	<u>-</u>	1) 1 0 0 1	11		1 7.07577
1 10	Signature	John C, Lehu	Me. Title Register Land Su	rveyor Registratio	on No.S1665
		(County Surveyor, Regist	ered Land Surveyor, or other duly author	orized official)	
	Office of R	egister of Deeds, County of	Forest	I hereby certify	~ ~ ~
		Was nied in this omce for r	ecord on the 9th	day of December	19.88
	1	el HEchenbres			
		(Register of De	eds) .		
O - Corner menument restand	D		Danuer		
O = Corner monument restored.	ъу	***************************************	Deputy		

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None, first corner restoration.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

No, proportional methods.

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

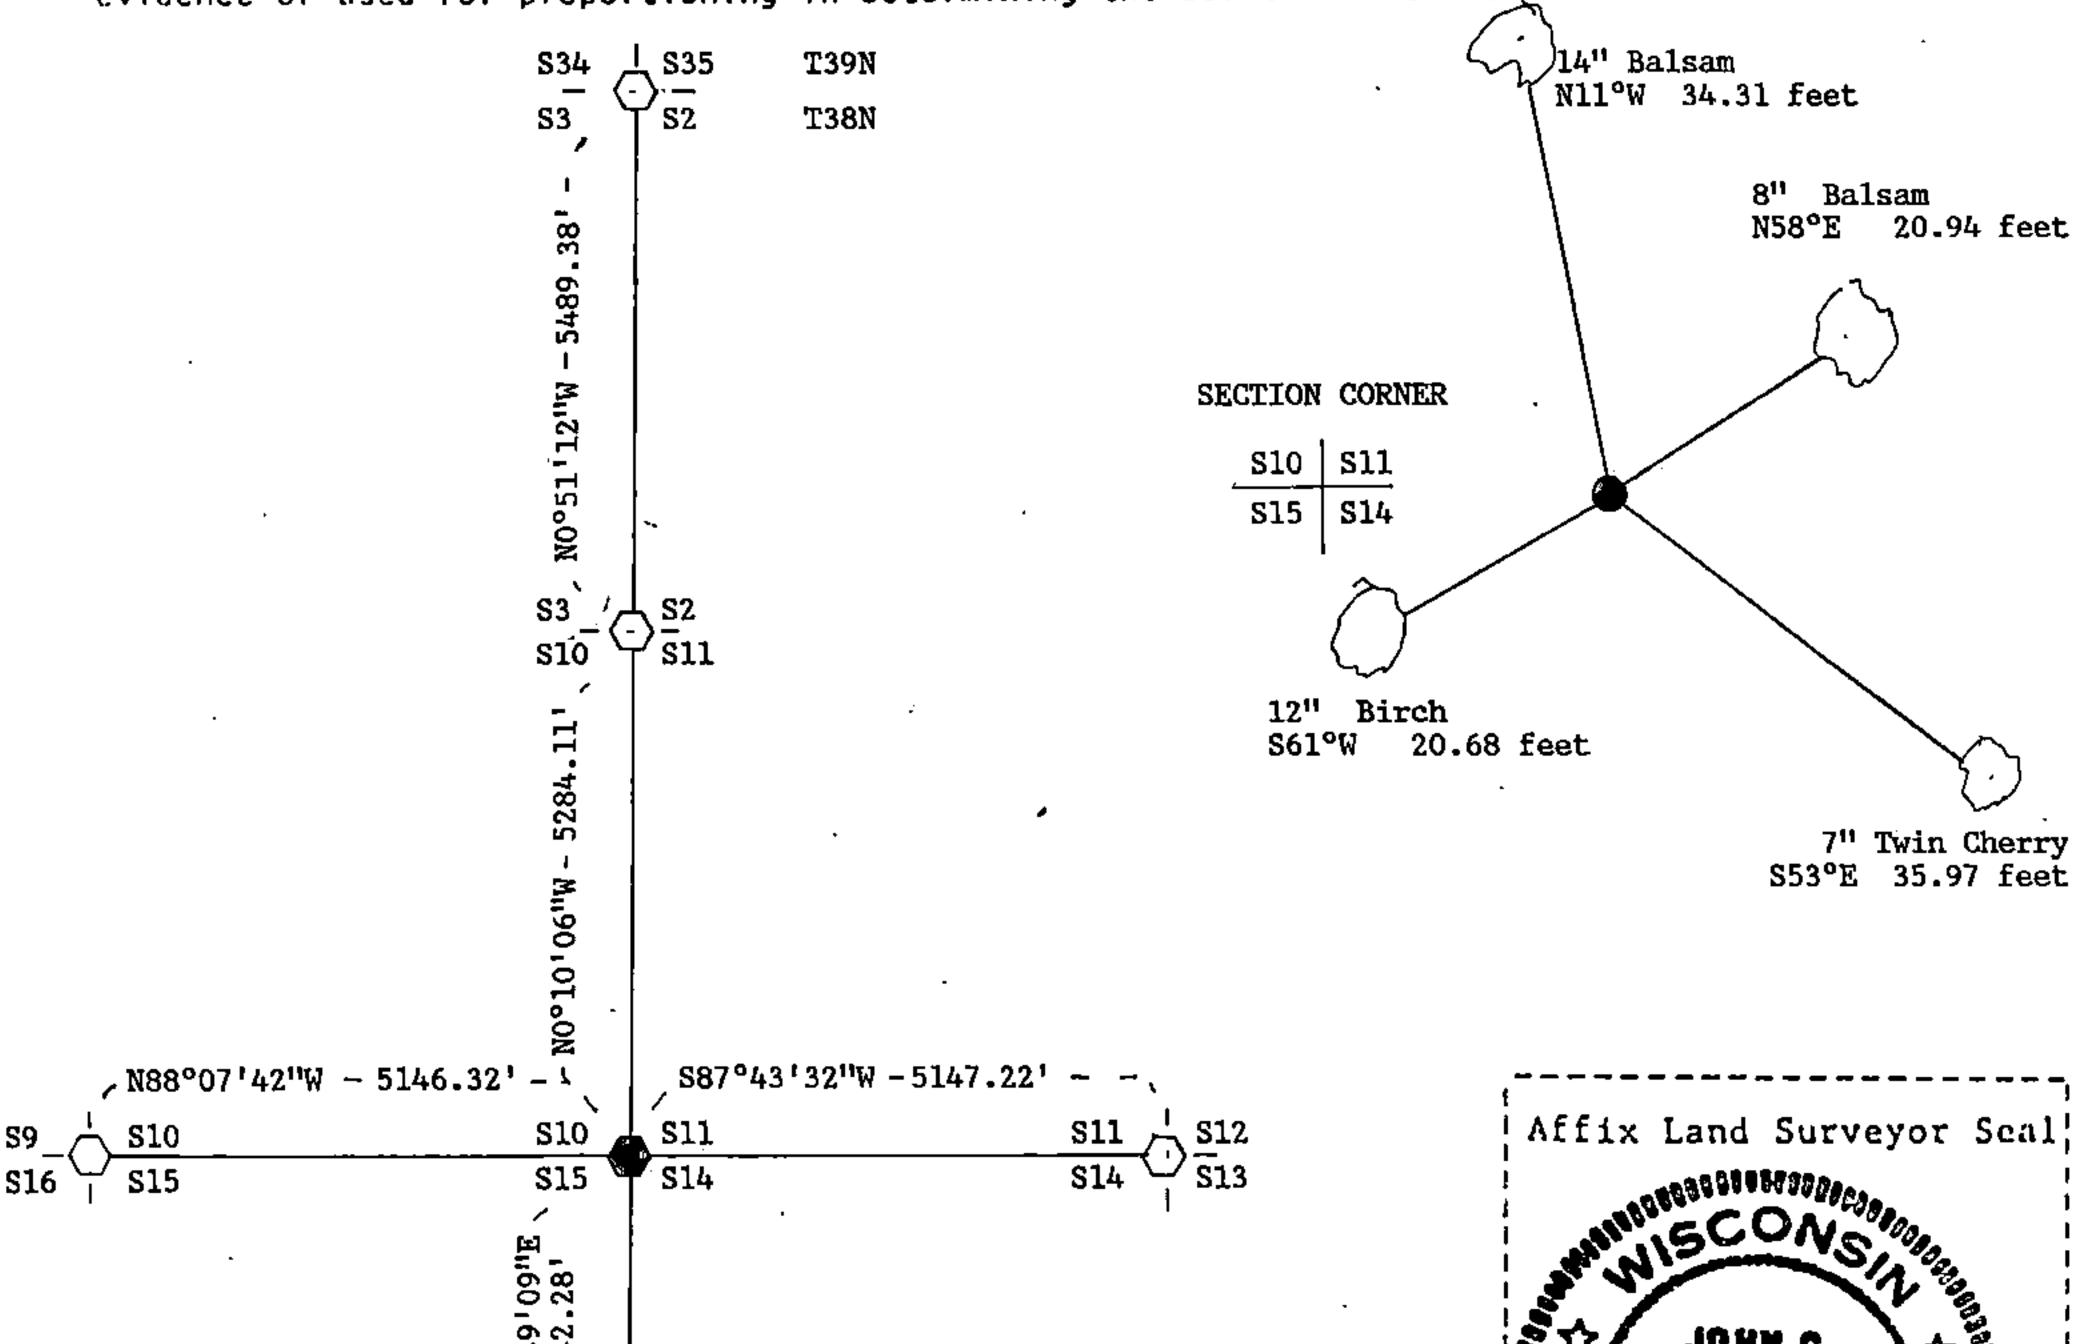

(i) John Schulke

4 g

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Oct. 15th, 1988

Survey requested by:

District Ranger

0-35-88 Date SCHULKE

S-1665

LUDINGTON

M

PNO SURVE BOOK