

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of Forest } ss.

I Jean F. Resvick, do hereby certify that on the 14 day of September, 19 79, I found evidence of the Northeast Section corner of Section 14 Township 34 North, Range 16 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Surveyed by James McBride in 1858
80.00 chains north between Sections 13 and 14, set post
Hemlock 24, N54W, 45 links
Hemlock 10, N83E, 25 links
Birch 16, S6E, 21 links
Hemlock 14, S64W, 9 links
South, 11 chains enter cedar swamp
North, 22 chains enter cedar swamp

Description of corner evidence found:



Cedar post with location poster
Possible hemlock stump at N54W, 45 links
Possible hemlock stump at S64W, 9 links
Plantation post SE of post dated 1938
South 11 chains enter cedar swamp
North 22 chains enter swamp
Small swamp just north of corner
Post was in place in 1934

Description of monument and accessories I established to perpetuate the location of this corner:

Replaced post with 2 inch inside diameter, galvanized iron pipe,
3 feet long, filled with concrete, with brass cap stamped
T34N, R16E, S11, S12, S14, S13, 1979, S-802

Blazed and scribed the following new bearing trees

Yellow Birch 4, bears N82E, 21.57 feet
Maple 10, bears S3E, 30.12 feet
Balsam 16, bears N49W, 40.38 feet
Set steel sign post northwest, 0.5 foot

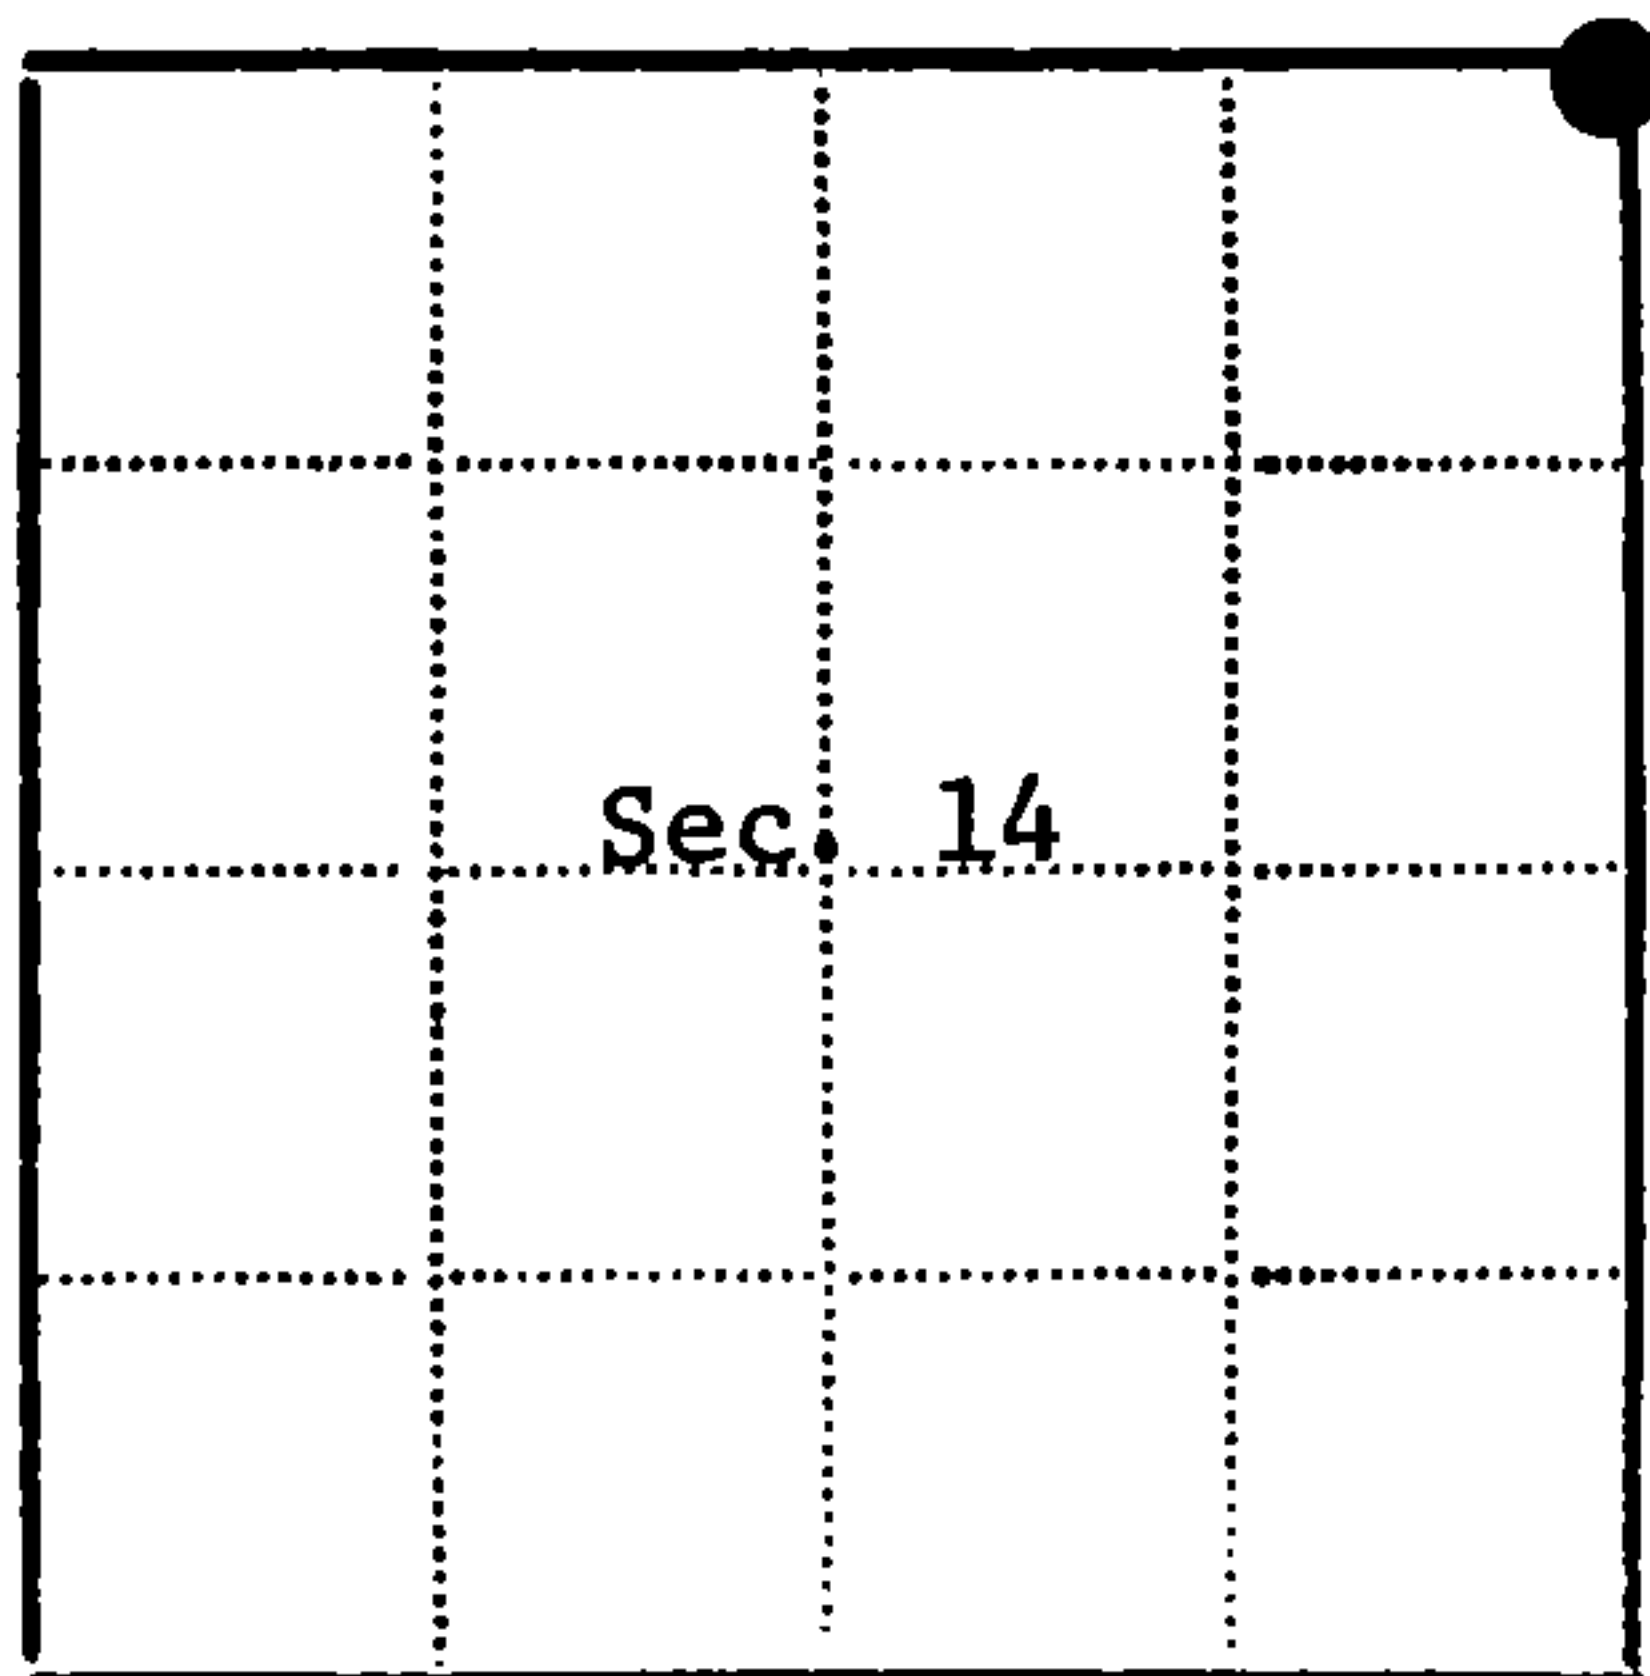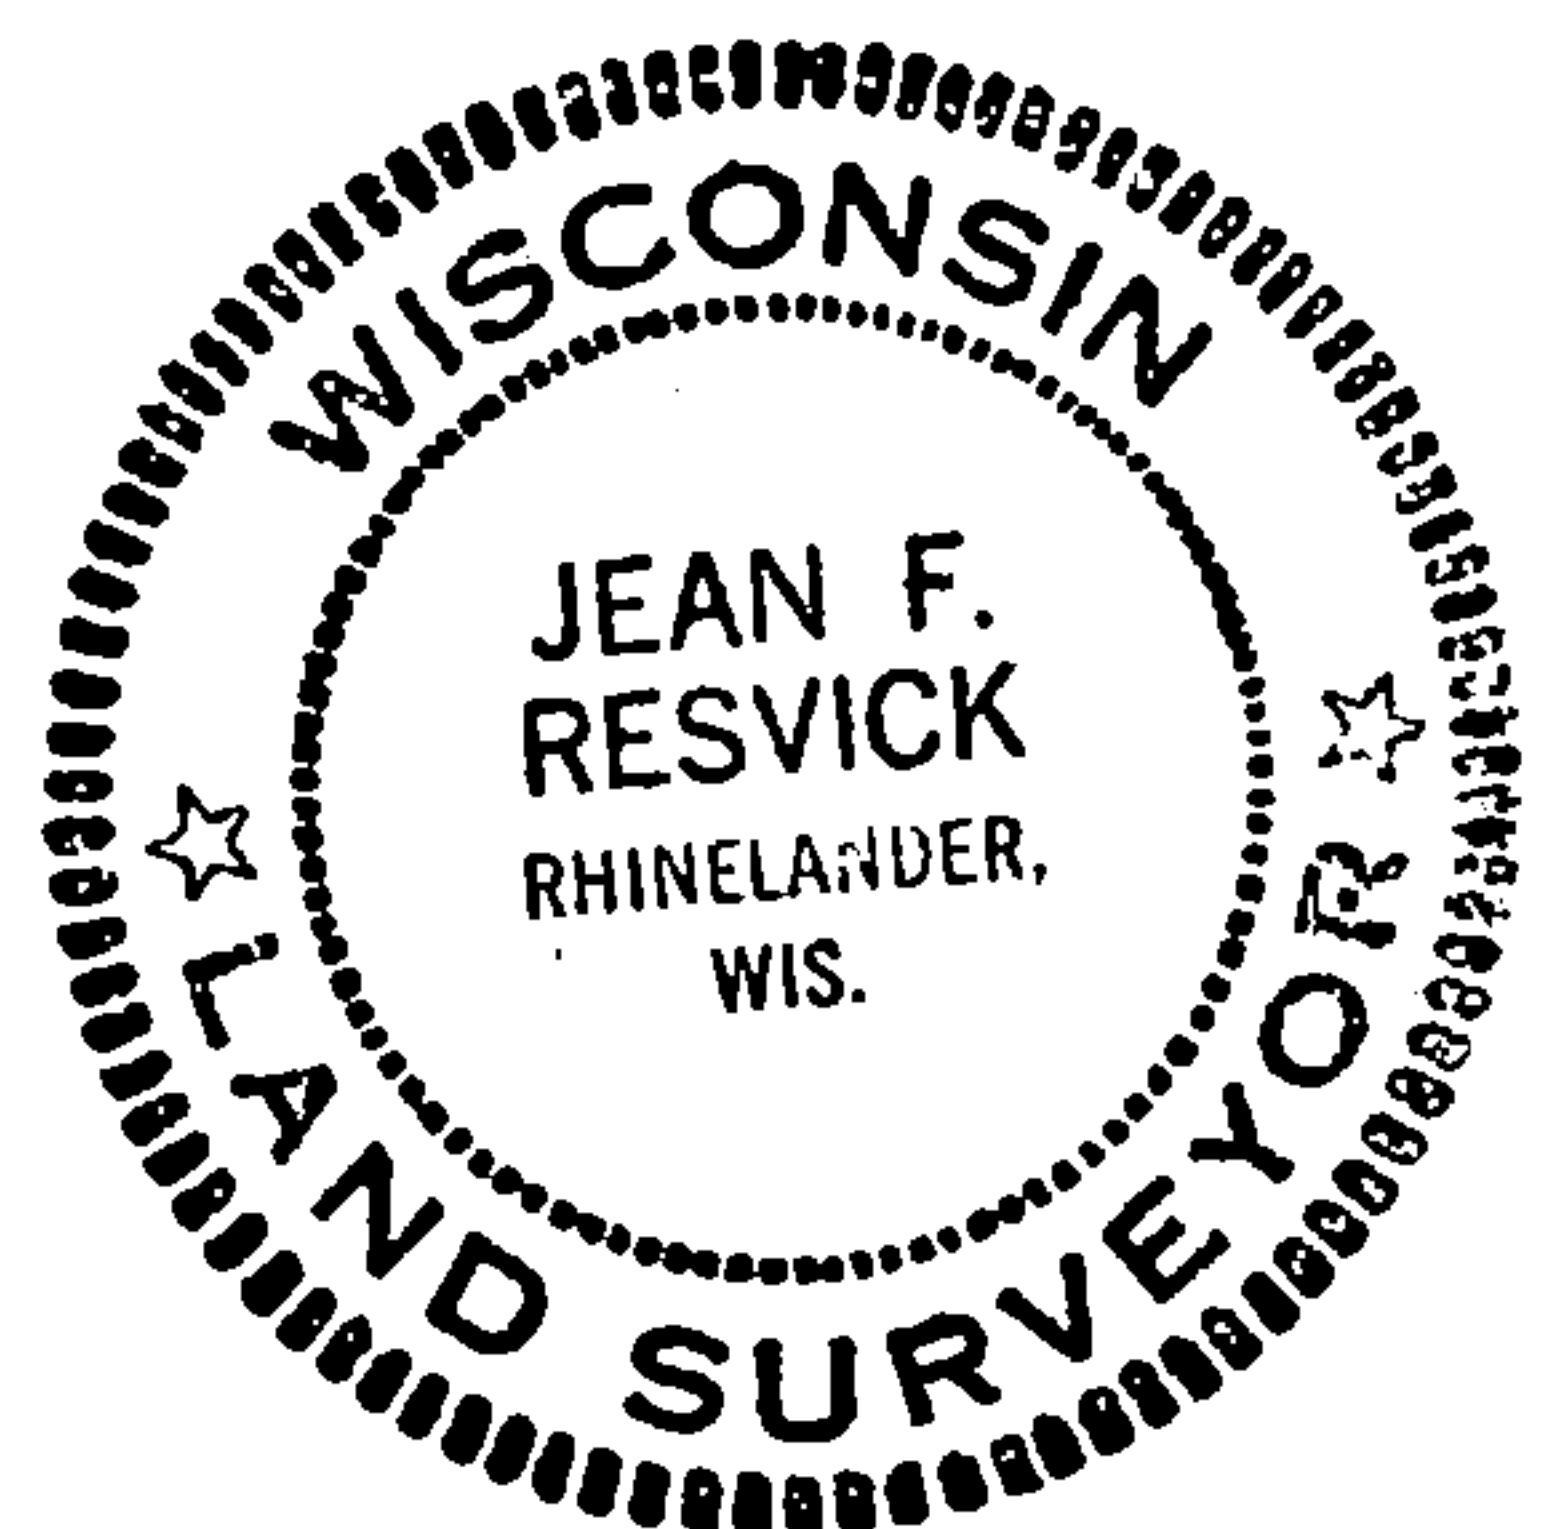

● - Corner monument restored
□ -

Resident witnesses.....

Dated at Rhinelander Wisconsin, this 25 day of September 19 79..

Signature Jean F. Resvick Title Land Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-802 DOCUMENT NO. 118066

Office of Register of Deeds County of Forest

I hereby certify that the within instrument was filed in this office for record on the 9th day of June 19 80, and was filed in Book No. Page No. of County Records.

Signature Sharon Mueller Title Deputy

Township 34 North, Range 16 East, Section 14, Index No. J-21, Page No.

43416110000

U. S. PUBLIC LAND SURVEY MONUMENT RECORD


INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.

○ = Corner monument restored.

Section Corner to Sections 11, 12, 13 and 14, T.34N., R.16E., Forest County, Wisconsin.

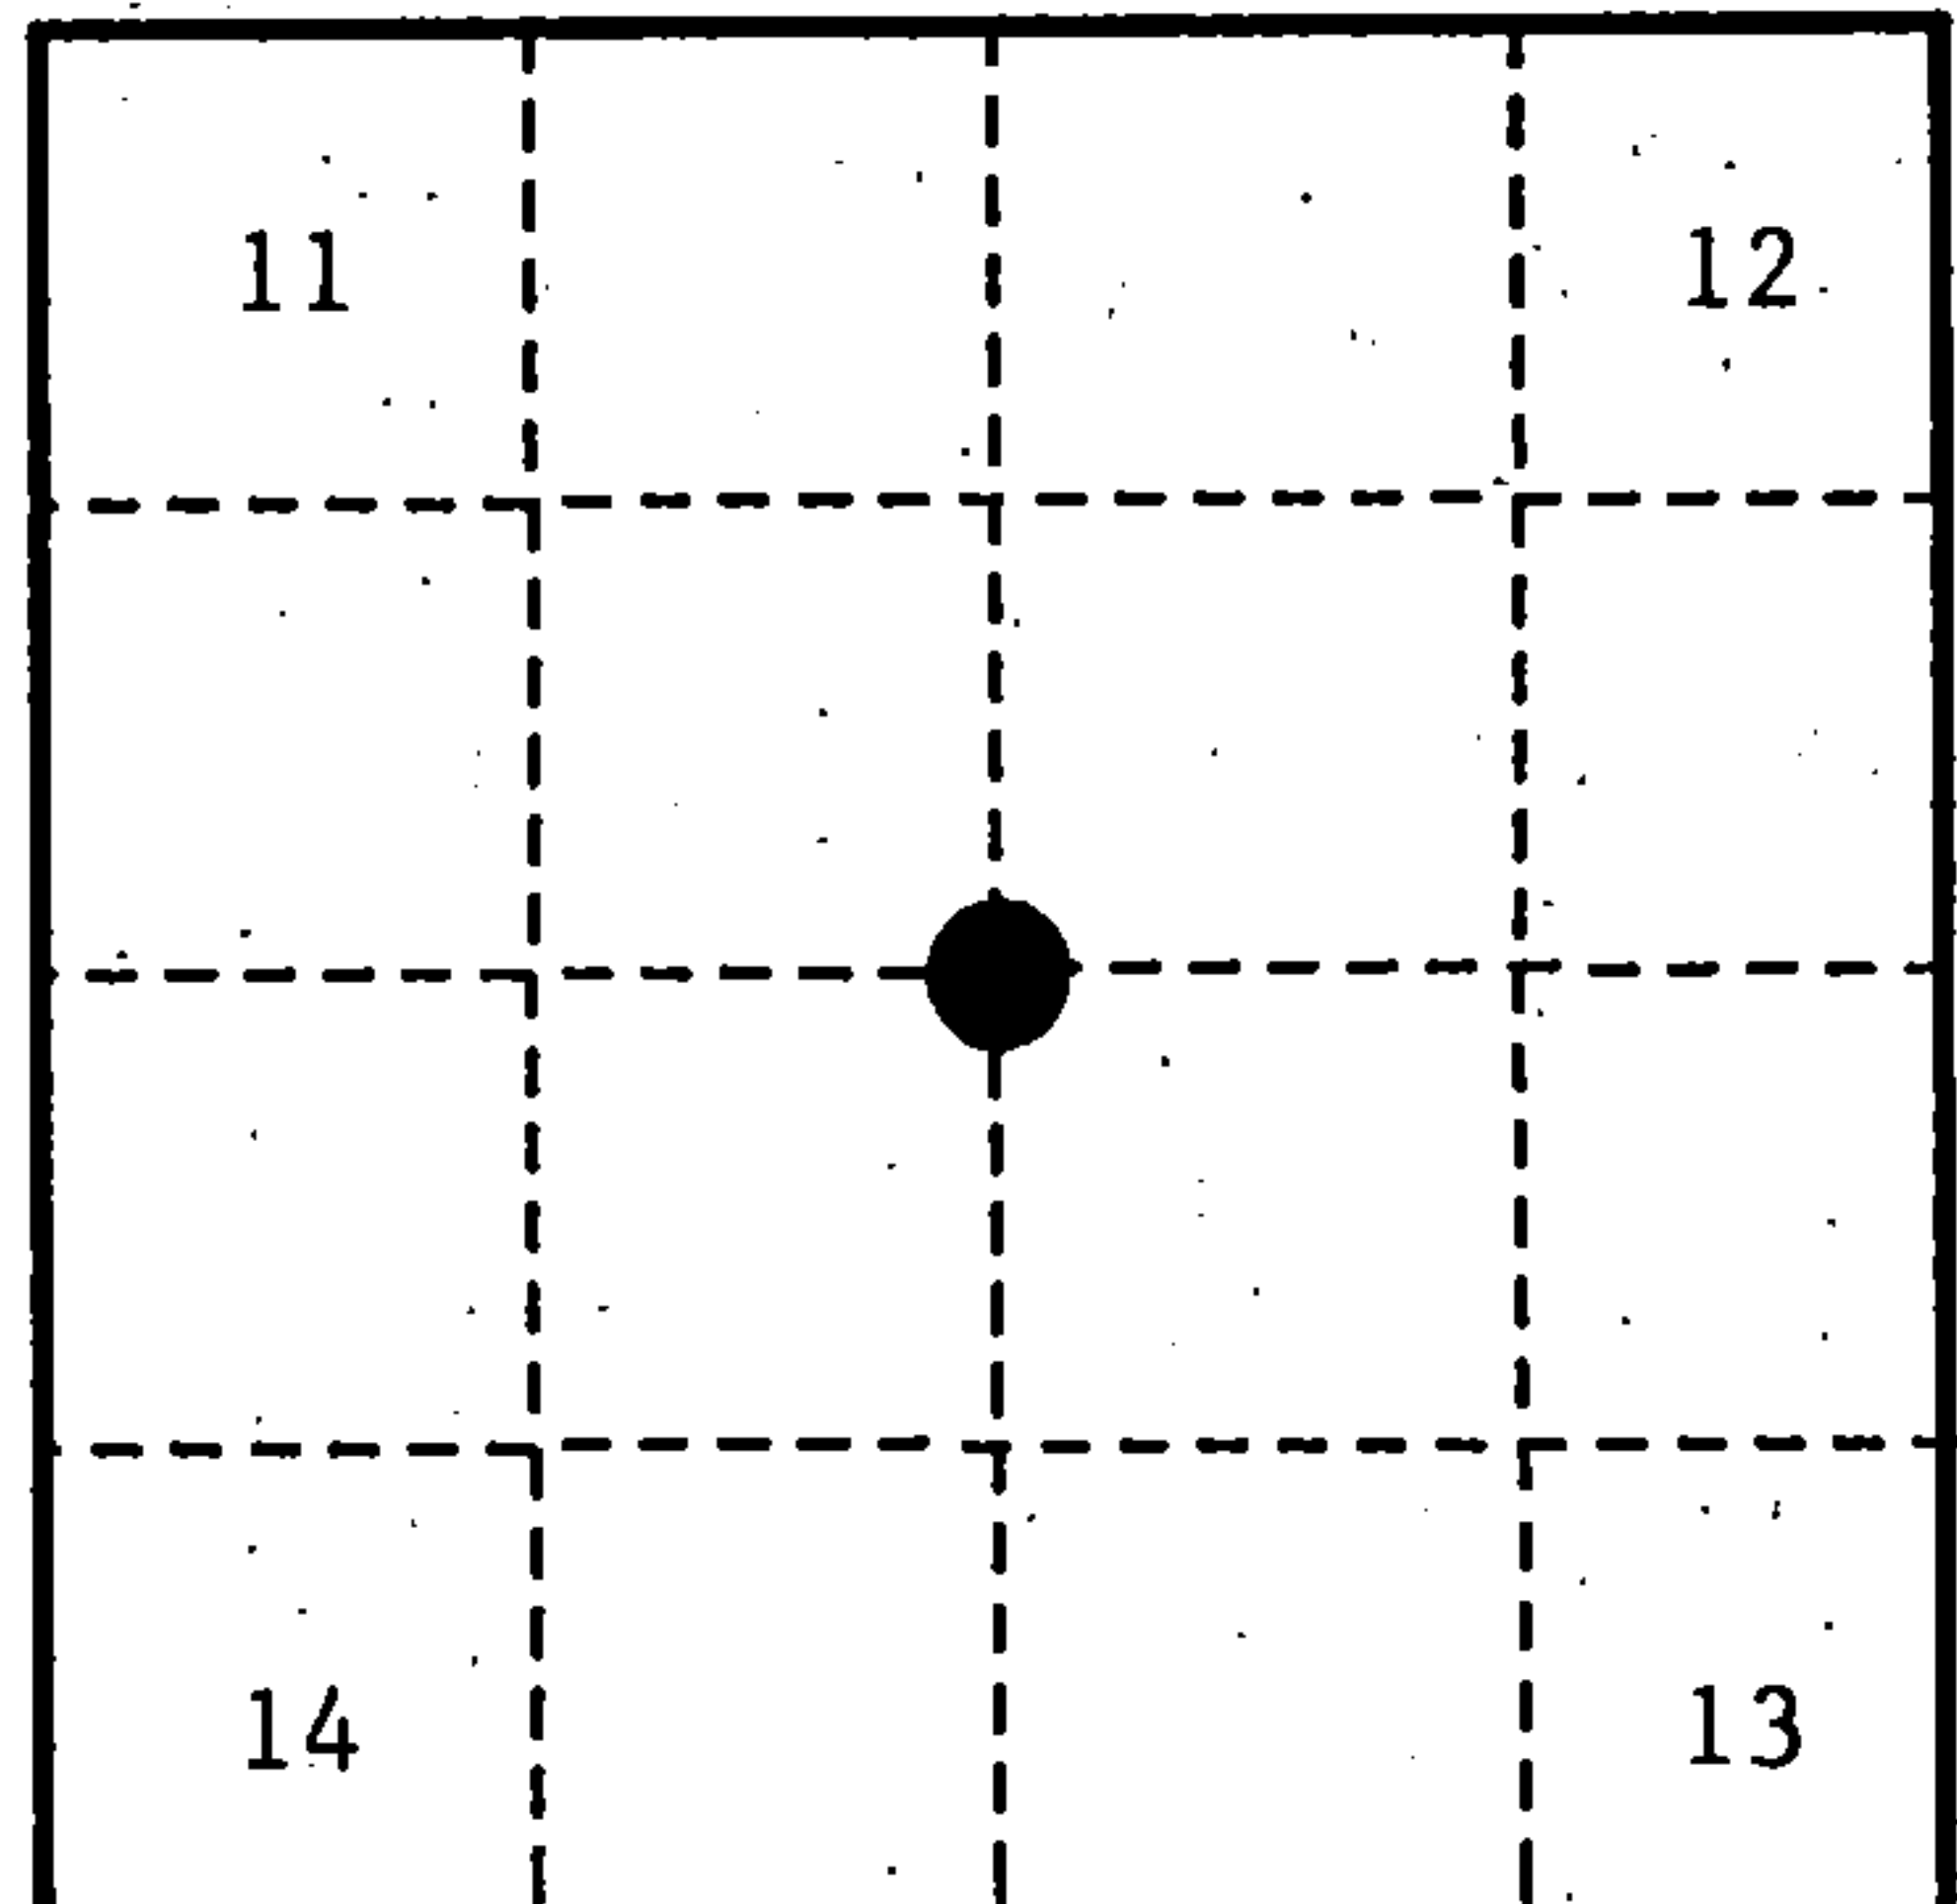

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1885, James McBride set a wood post with the following B.T.'s: Hemlock, 24", N.54W., 45 links (29.70 feet); Hemlock, 10", N.83E., 25 links (16.50 feet); Birch, 16", S.06E., 21 links (13.86 feet); Hemlock, 14", S.64W., 9 links (5.94 feet).

In 1834, Leonard Sobzak (C.C.C.) found cedar post and placed a metal location poster on the same.


In 1979, Jean Resvick (R.L.S.) found the cedar post with the Forest Service Location poster, Hemlock stumps at N.54W., 45 links (29.70 feet), and S.64W., 9 links (5.94 feet). Accepted as best evidence of corner. Set 2" monument with brass cap stamped to identify the corner and the following B.T.'s: Yellow Birch, 4", N.82E., 21.57 feet; Maple, 10", S.03E., 30.12 feet; Balsam, 16", N.49W., 40.38 feet.

In 1990, Alan Harrison (R.L.S.) found monument and B.T.'s and added a new B.T. and Steel Sign Post.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. 2" Iron pipe with stamped brass cap to identify the corner.
2. White Birch, 5", S.82W., 20.46 feet (new).
3. Yellow Birch, 4", N.82E., 21.59 feet.
4. Maple, 10", S.03E., 30.12 feet.
5. Balsam, 16", N.49W., 40.38 feet.
6. Steel Sign Post, West, 0.51 feet.

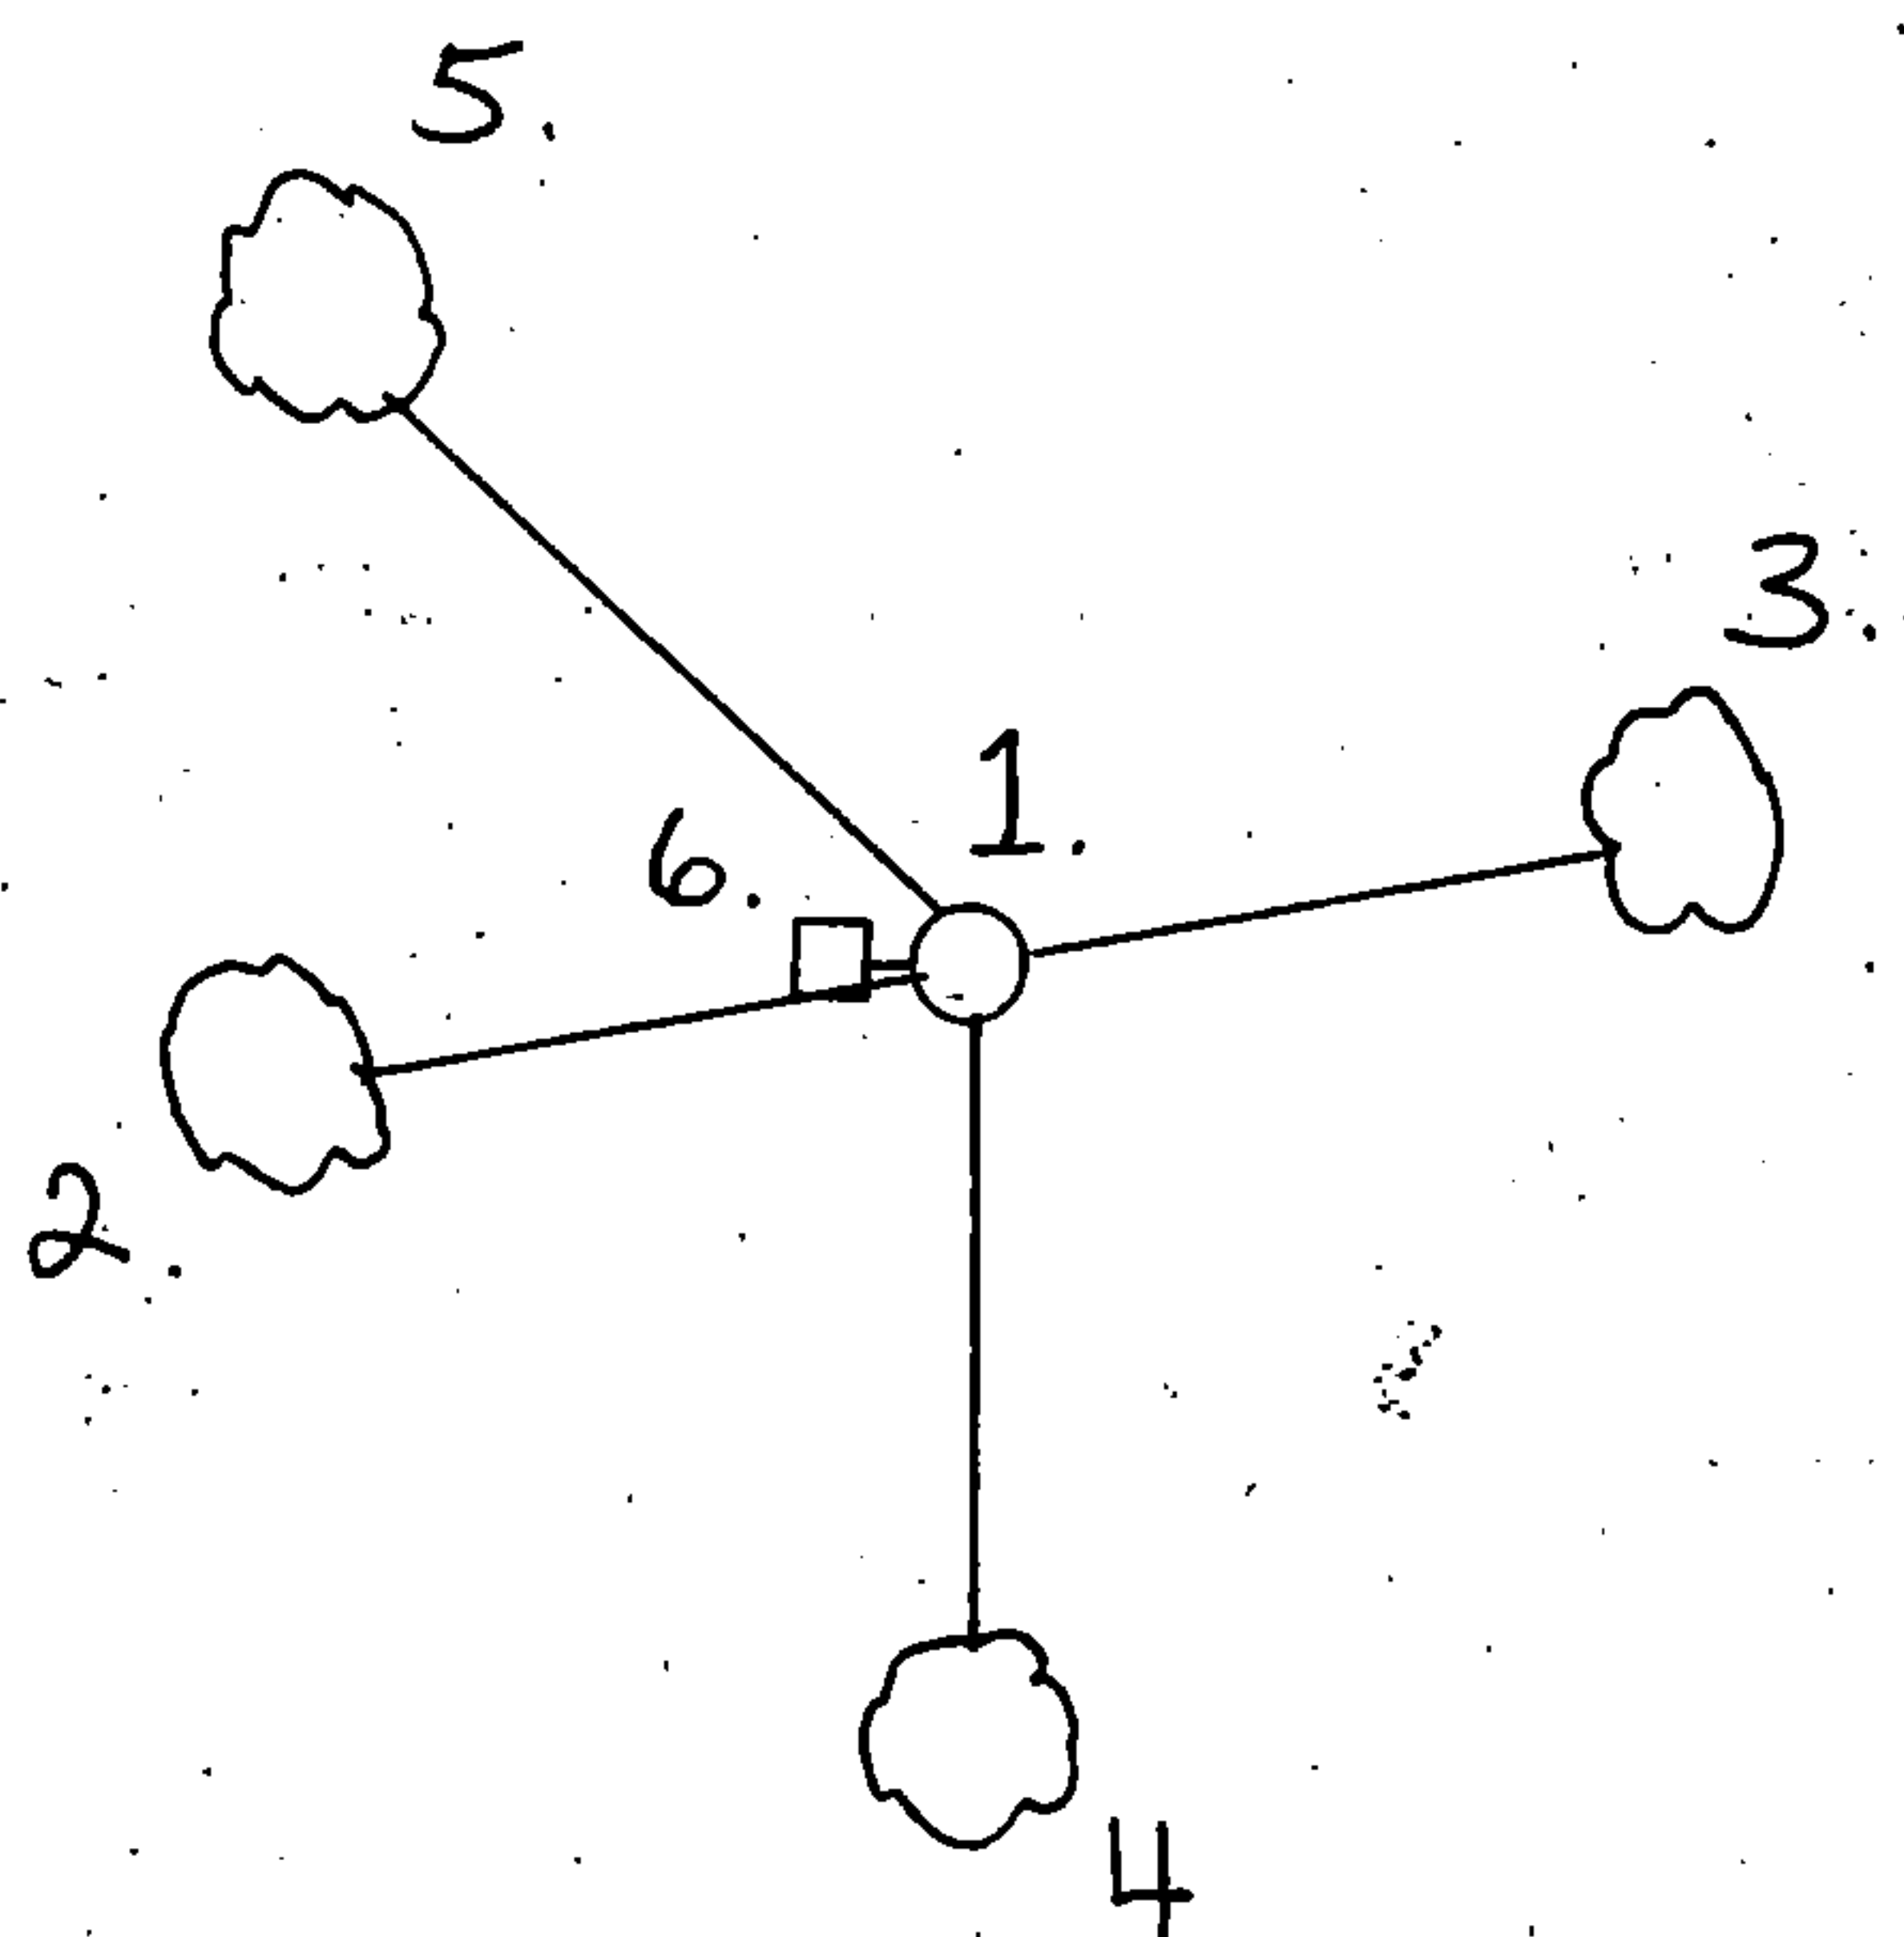

REGISTER'S OFFICE
Forest County, Wis.

Received for record this 19th day
of SEPTEMBER A.D. 1990 at
3:15 o'clock P.M. and recorded
in Vol. CORNER RESTORATIONS
page 21.

Paul Heckenrother
Register of Deeds

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner, as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2)
a found perpetuated location

(g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No.

(1) I, Alan D. Harrison


(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

Date

CERTIFICATE READY FOR FILING:

District Ranger

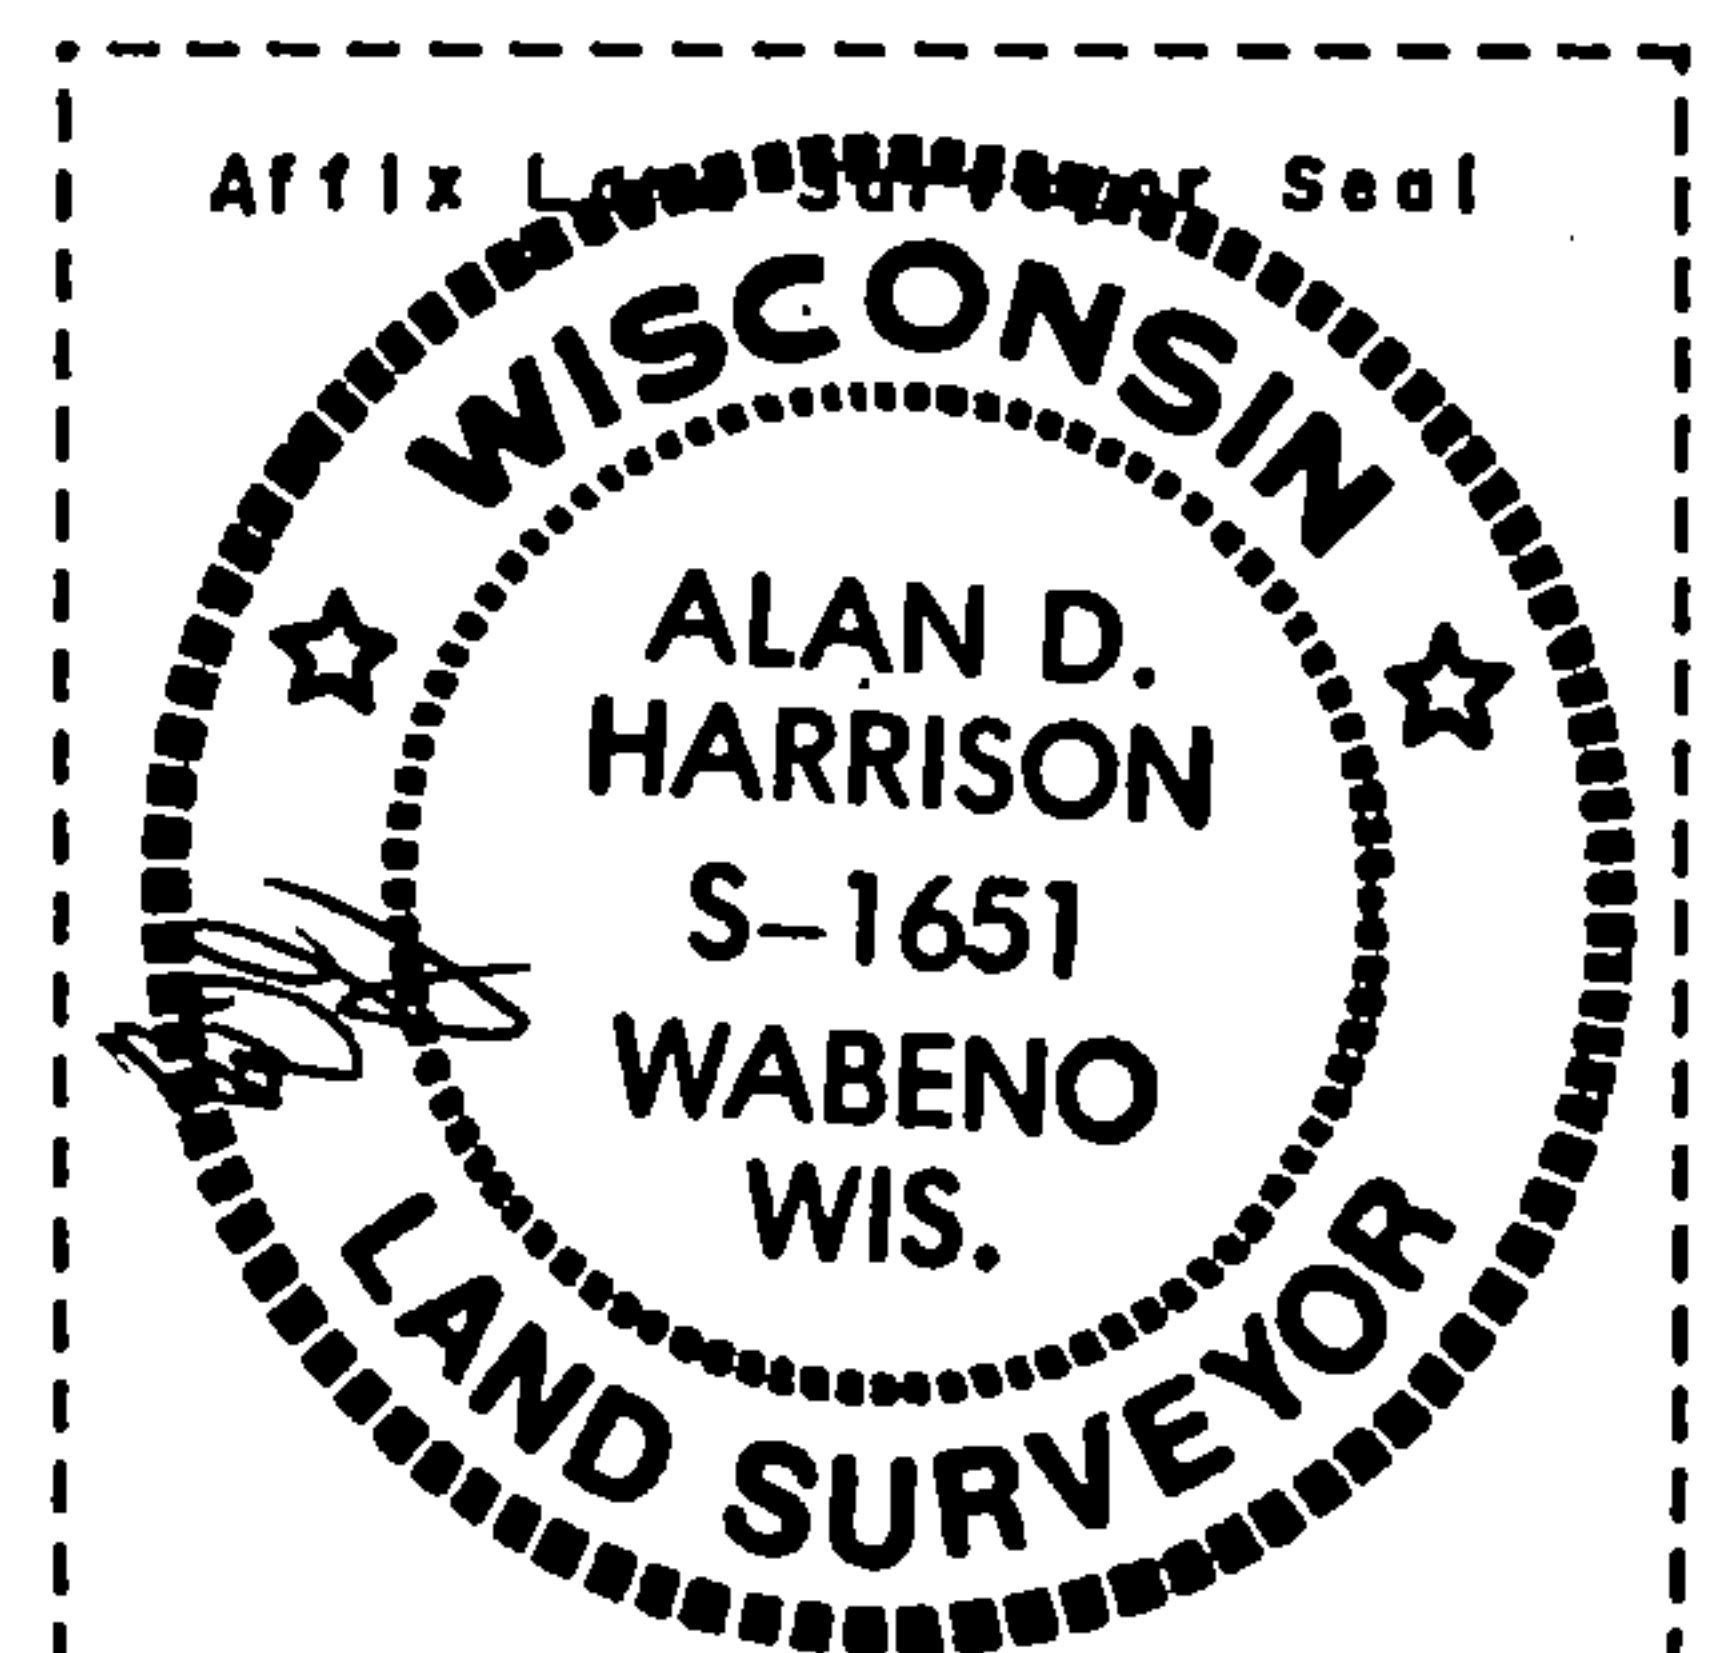

U. S. PUBLIC LAND SURVEY MONUMENT RECORD


INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.

○ = Corner monument restored.

Section Corner to Sections 11, 12, 13 & 14;
T.34N., R.16E., 4th P.M.

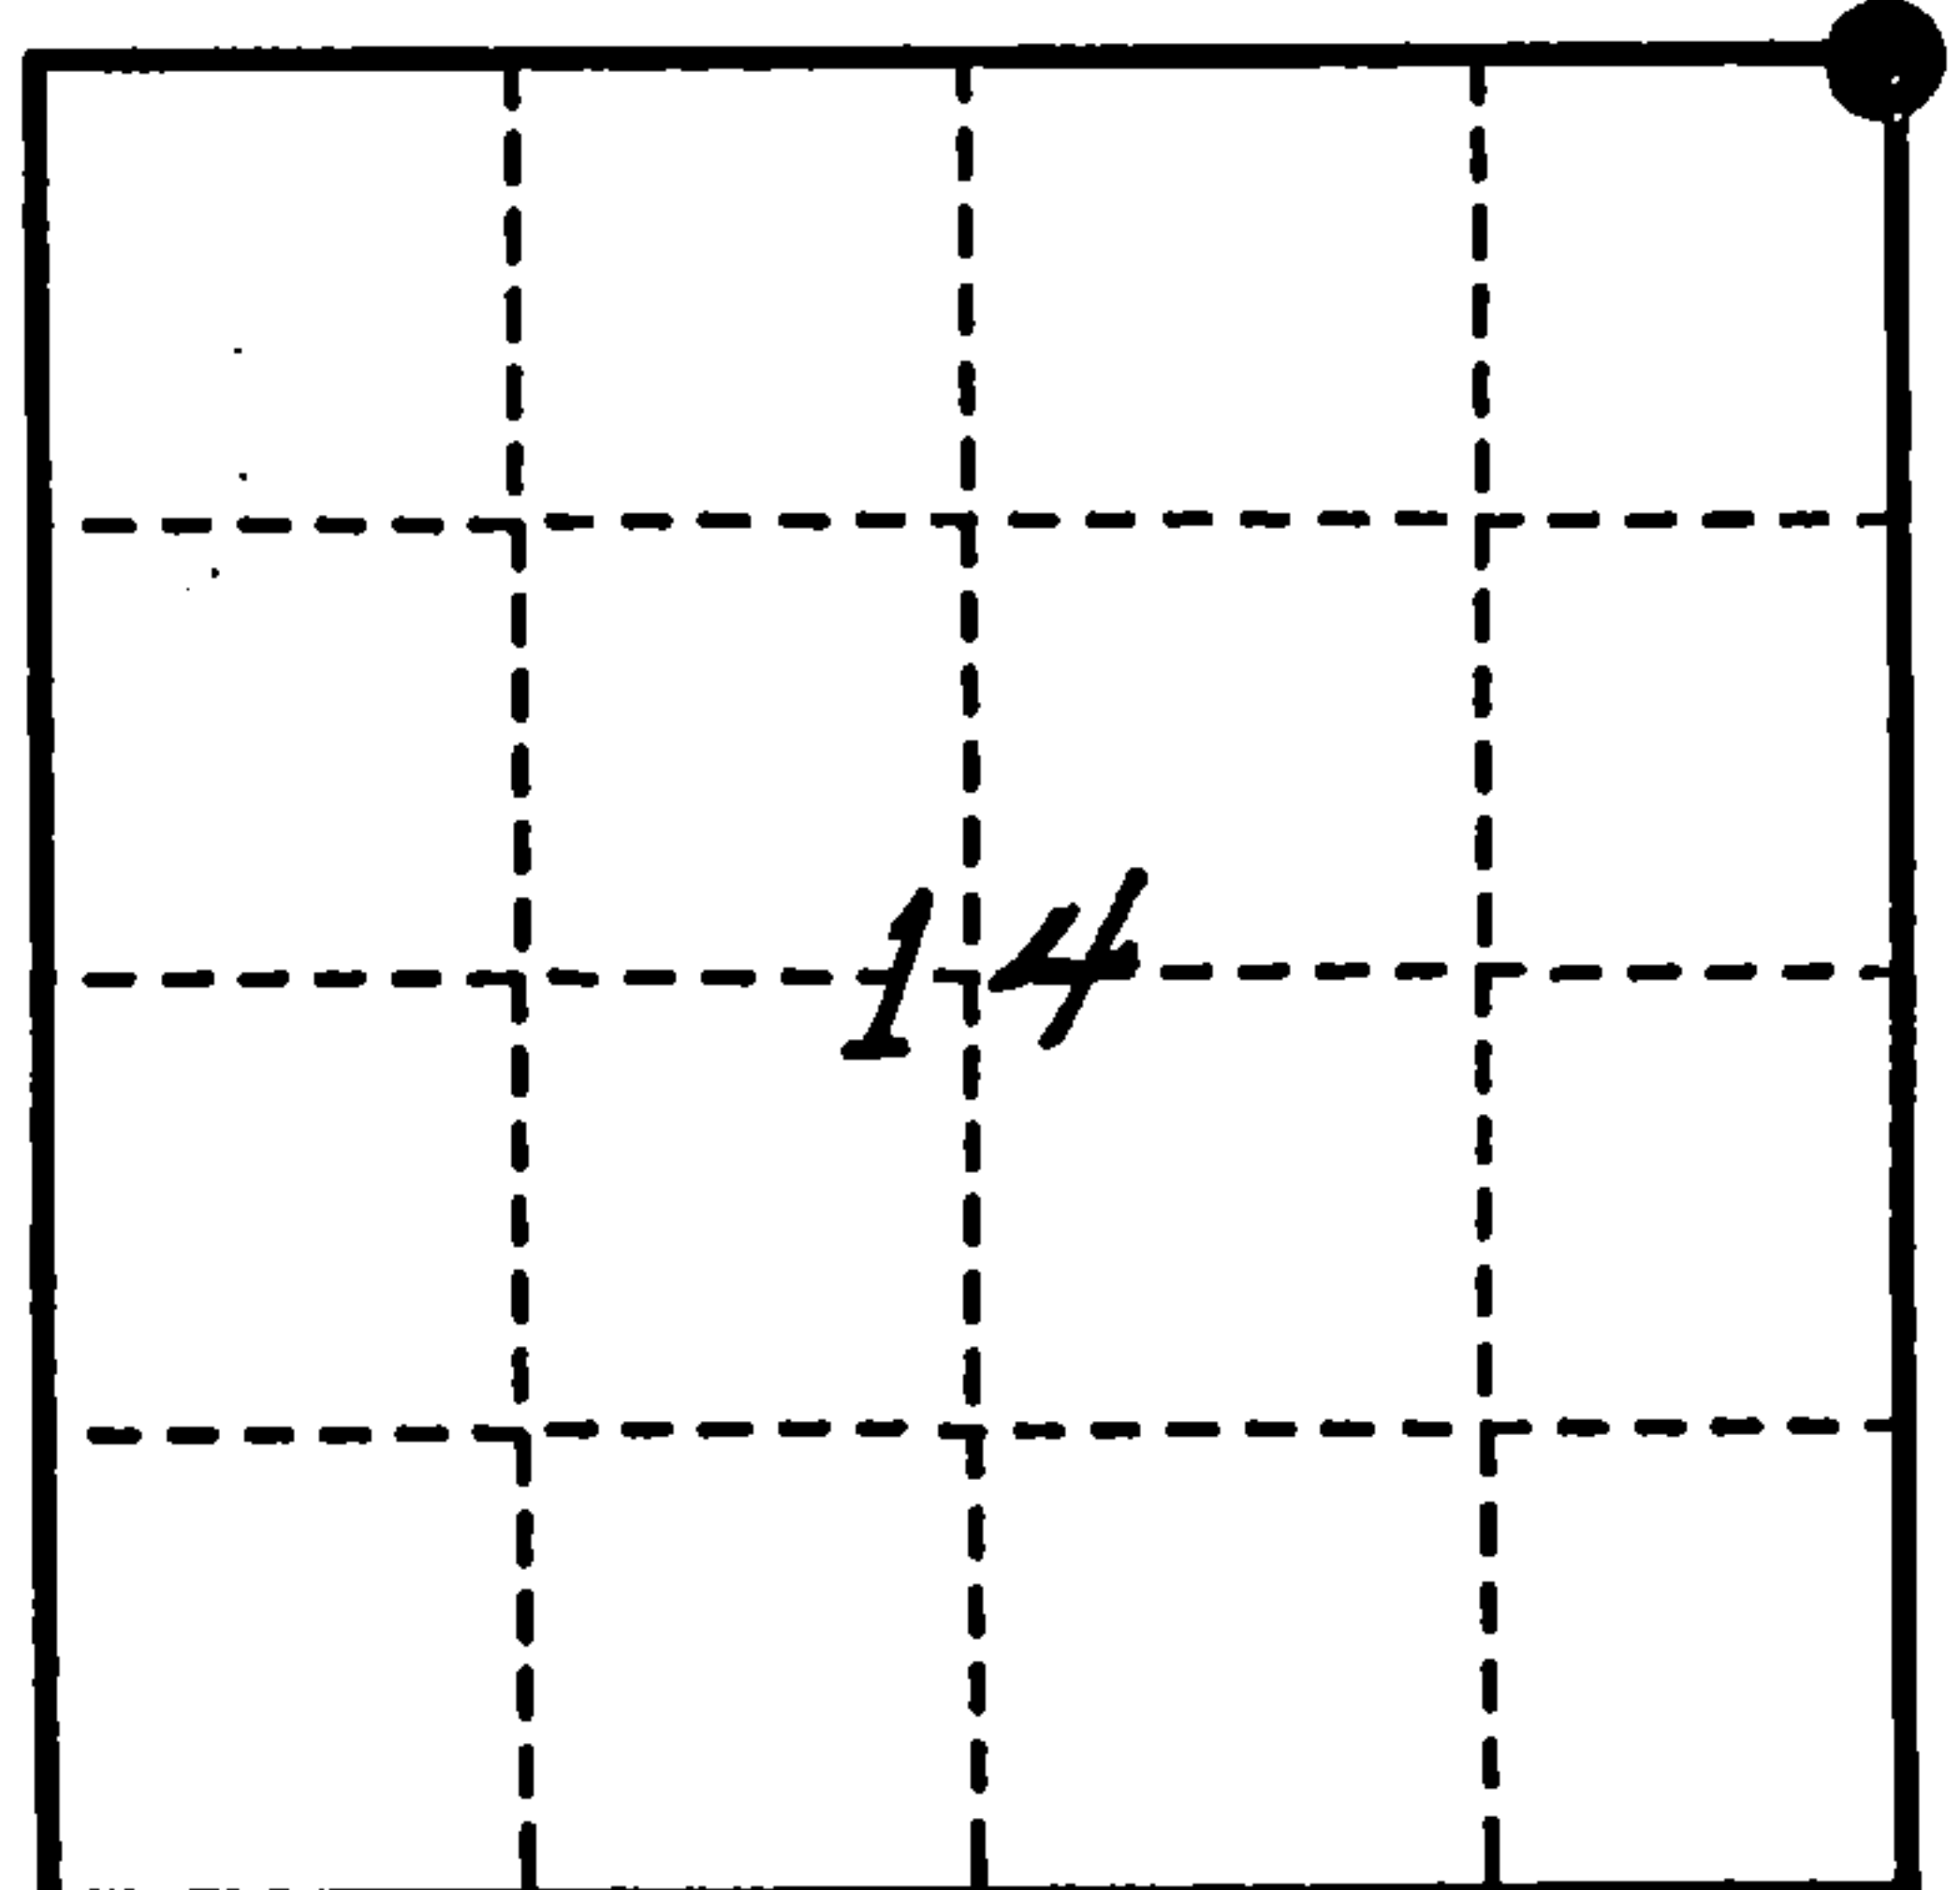

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

Found monument, sign post and two BTs by Resvick in good condition. Balsam BT in poor condition and nearly dead. Another BT, not of record, is present: White Birch, 6", S.86°W., 20.47'.


We made one new BT: Black Cherry, 8", N.43°W., 29.84'

This corner was restored by Resvick in 1979.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. 2" Iron pipe with brass cap.
2. White Birch, 4", N.82°E., 21.57'.
3. Red Maple, 10", S.3°E., 30.12'.
4. White Birch, 6", S.86°W., 20.47'.
5. Balsam Fir (dead), 16", N.49°W., 40.38'.
6. Black Cherry, 8", N.43°W., 29.84'.
7. Steel sign post, Northwest, .5'.

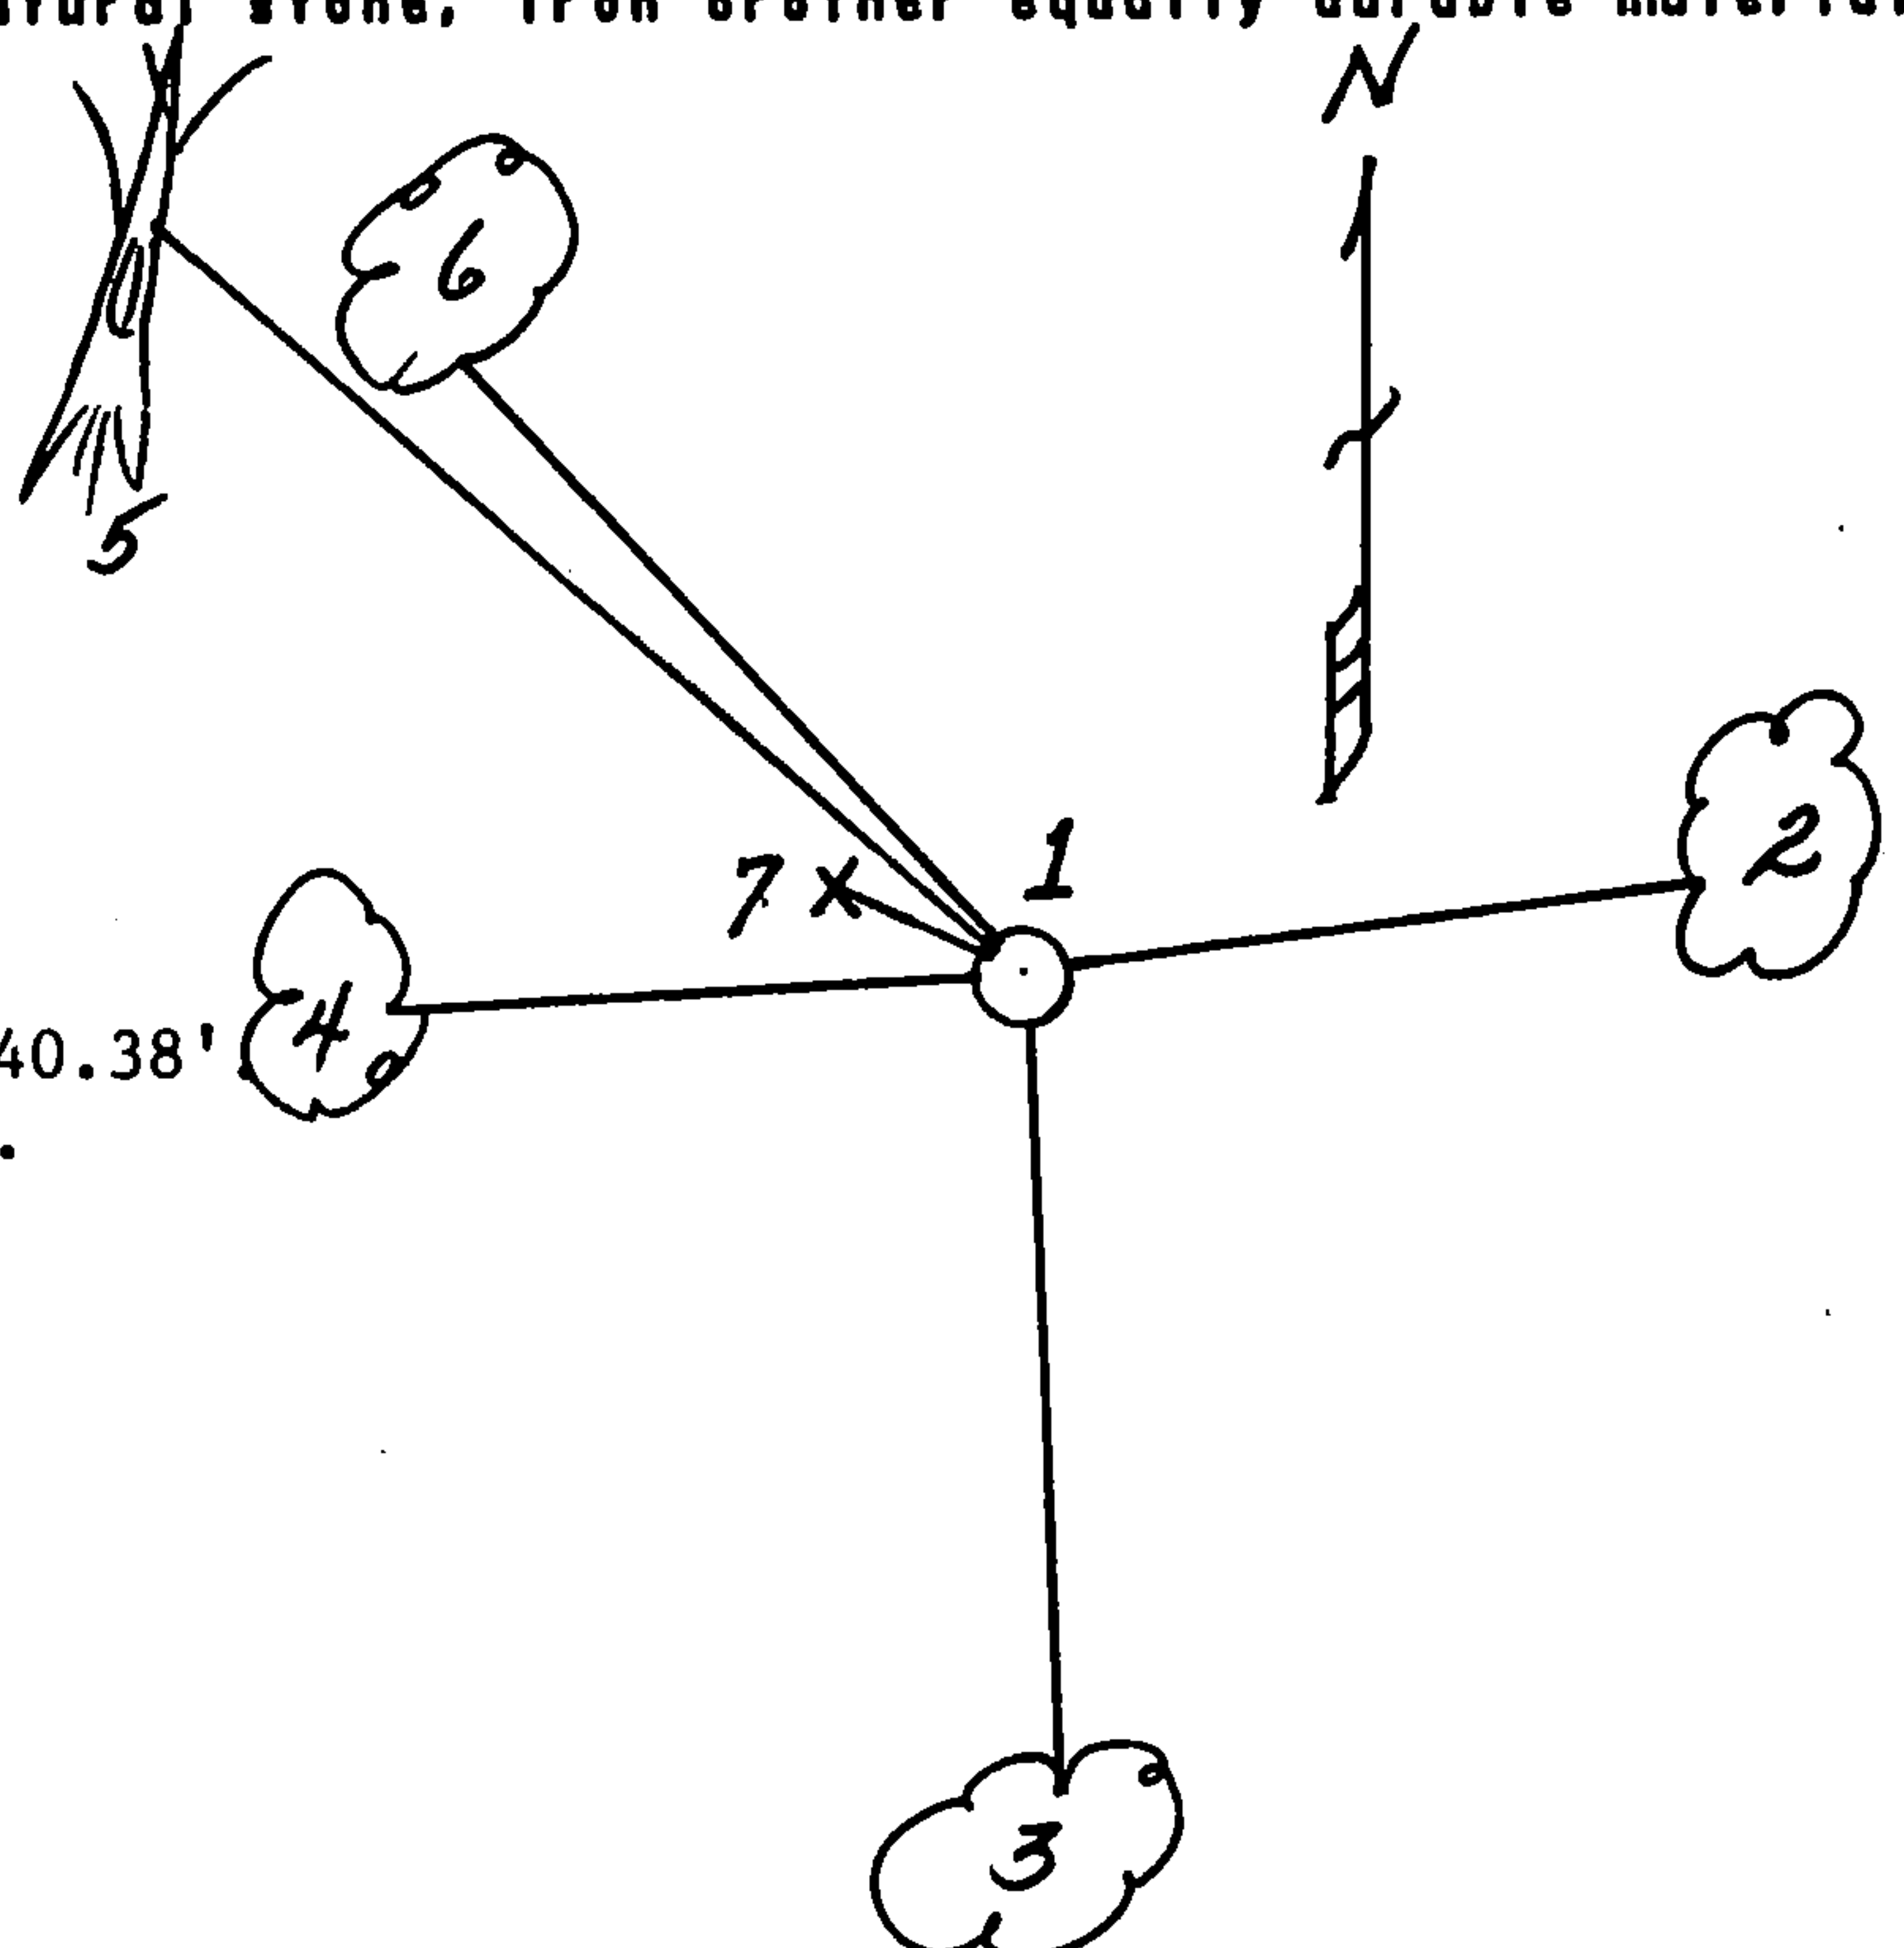

REGISTER'S OFFICE /
Forest County, Wis.

Received for record this 9th day
of March, A.D., 19 79 at
9:15 o'clock A.M. and recorded
in Vol. 346 Corner Restorations
page 5-21
Paul Chittenden
Register of Deeds

- (a) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d). above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

N/A

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2)

- (g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

N/A

- (1) I, Milo E. Stefan
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

November 20, 1992

Date

CERTIFICATE READY FOR FILING:

Dale R. Covey
Acting District Ranger

