

State of Wisconsin

County of FOREST

ss. RESTORATION OF LOST ORIGINAL GOVERNMENT SURVEY CORNER.

I NEAL SPERHAKE, do hereby certify that on the SEVENTH day of AUGUST, 1964, I established the NORTHWEST SECTION CORNER OF SECTION 36, TOWNSHIP 35 NORTH, RANGE 13 EAST, Fourth Principal Meridian, as described hereon.

History: This corner was established during the original survey of this township, as noted in the original field notes for the original survey of T35N-R13E, 4th. p.m.

Description of monument and accessories I established to perpetuate the location of this corner:


At the point determined for the location of the corner I emplaced a:

GALVANIZED IRON PIPE, THREE FEET LONG, ONE INCH IN DIAMETER, WITH ALUMINUM CAP DENOTED AS, "KIMBERLY CLARK CORP. T35N 25, 26, 35, 36 R13E SPERHAKE RLS 463 8/7/64."


The pipe is witnessed by:

W. Birch 5 N 78°E 13½ links. (SCRIBED S 25 NBT).
W. Birch 9 S 50°E 22 links. (SCRIBED S 36 NBT).
W. Birch 6 S 32°W 17½ links. (SCRIBED S 35 NBT).
W. Birch 7 N 28°W 56 links. (SCRIBED S 26 NBT).

Description as to how corner was located: No evidence of the original corner is present. Thus, set by double proportionate measurement. To the east, the quarter section corner between 25 and 36 has been previously established. To the west I have accepted a brass capped iron pipe set by C. E. Walker in 1940 as being the corner of 27, 28, 33, and 34. The actual distance between them is 200.90 chains. The record distance between them was 200.12 chains. The record distance between the ¼ between 25 and 36 and the corner of 25, 26, 35, 36, was 39.92 chains. Thus, the actual distance for the east-west position of 25, 26, 35, 36, is 40.08 chains west of the ¼ between 25 and 36. To the north the witness corner to sections 13, 14, 23, 24, has been determined, and to the south the town line corner of 35 and 36 has been determined. The actual distance between them is 234.38 chains. The record distance between them was 235.50 chains. Since the record distance between the town line corner of 35 and 36, and the corner of 25, 26, 35, 36, was 80.00 chains, the actual distance for the north-south position of 25, 26, 35, 36, is 79.62 chains north of the town line corner of 35 and 36.

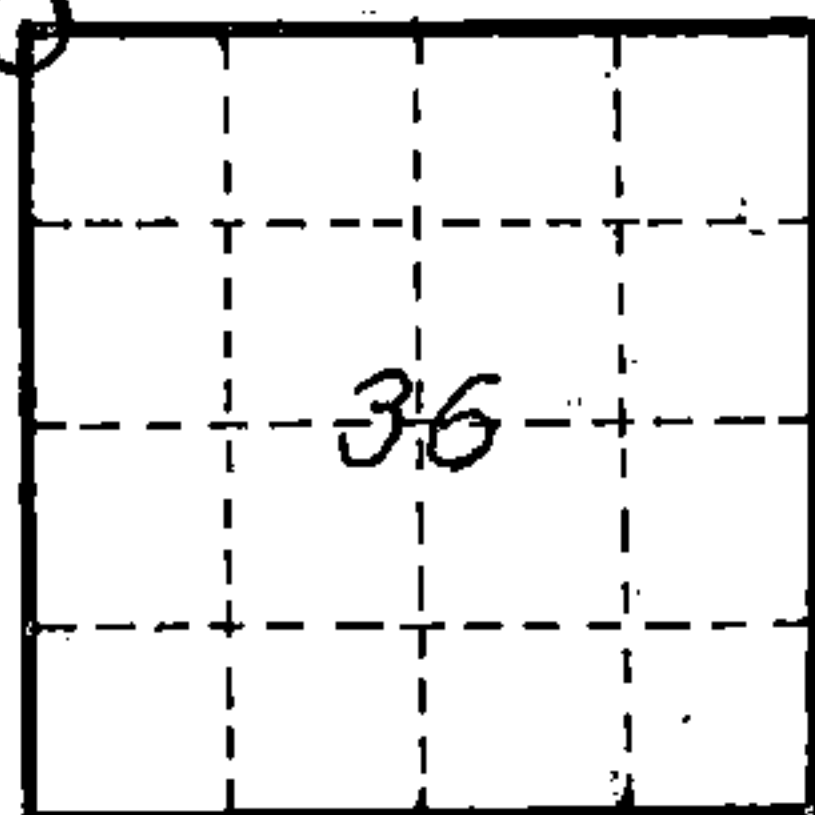

0 = Corner monument restored

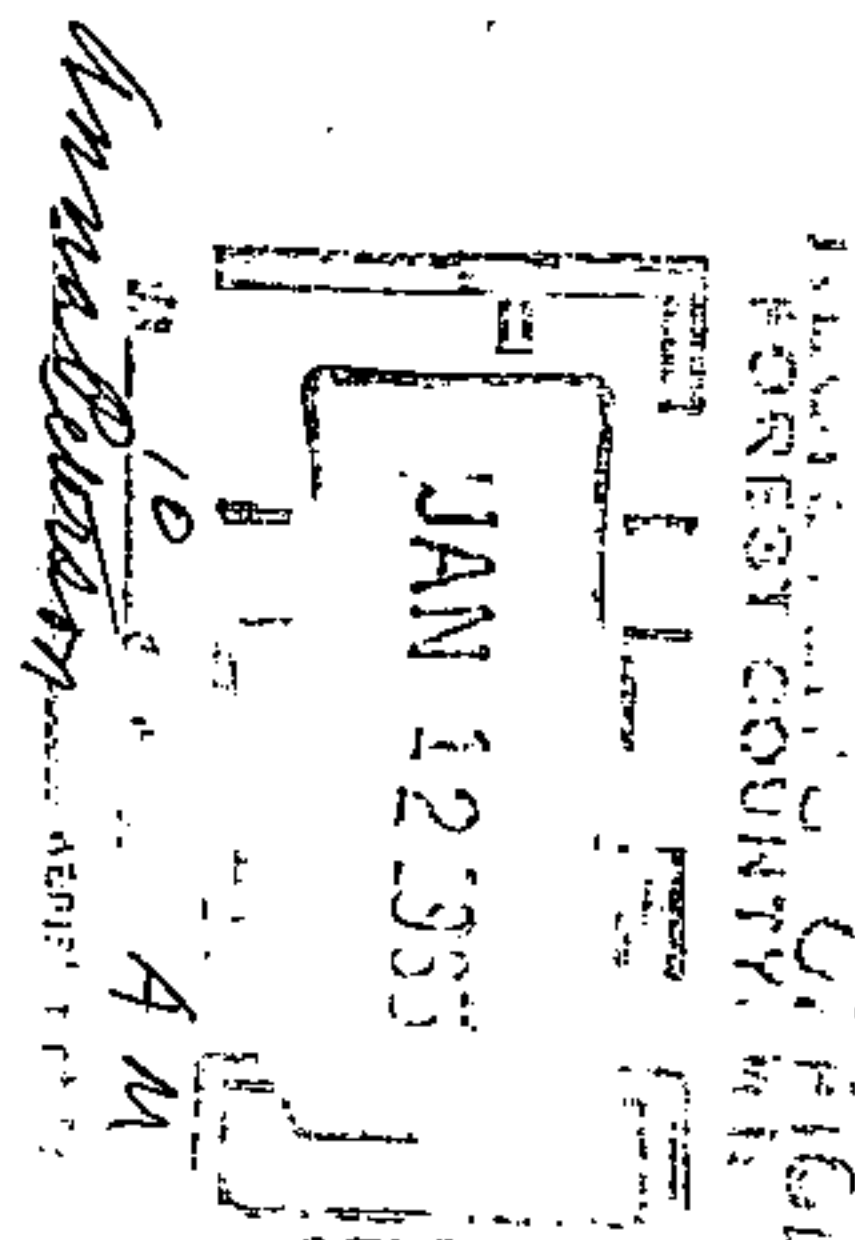

896621

Resident witnesses _____

Dated at Crandon, Wisconsin, this 12th day of January, 1965.

Signature Neal Sperhake

Title Registered Land Surveyor Registration No. 463

~~Office of~~ Forest County ~~of~~ Wisconsin,
I hereby certify that the within instrument was ~~filed in the~~
~~office for record~~ on the 12th day of January
1965, and was ~~filed in the~~ Book No. signed and ~~Page No.~~ sworn to
~~in County Records~~ before me.

Surveyor's Seal

Signature Anna Peterson Title Notary Public

435 13 26 9999

Index No.

1221