

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
○ = Corner monument restored.

Quarter Corner Common to Sections
1 and 12, T.35N., R.16E., Forest
County, Wisconsin


State Plane Coordinates

N - 138,443.95
E - 2,369,241.49

Geographic Coordinates

N - 45-32-07.85
W - 88-26-10.01

REGISTER'S OFFICE
Forest County, Wis.
Received for record this 24th day
of March A.D., 1999 at
1:15 o'clock P.M. and recorded
in Vol. CORNER RESTORATION
page E-23
Christi Ehlinger
Deputy Register of Deeds

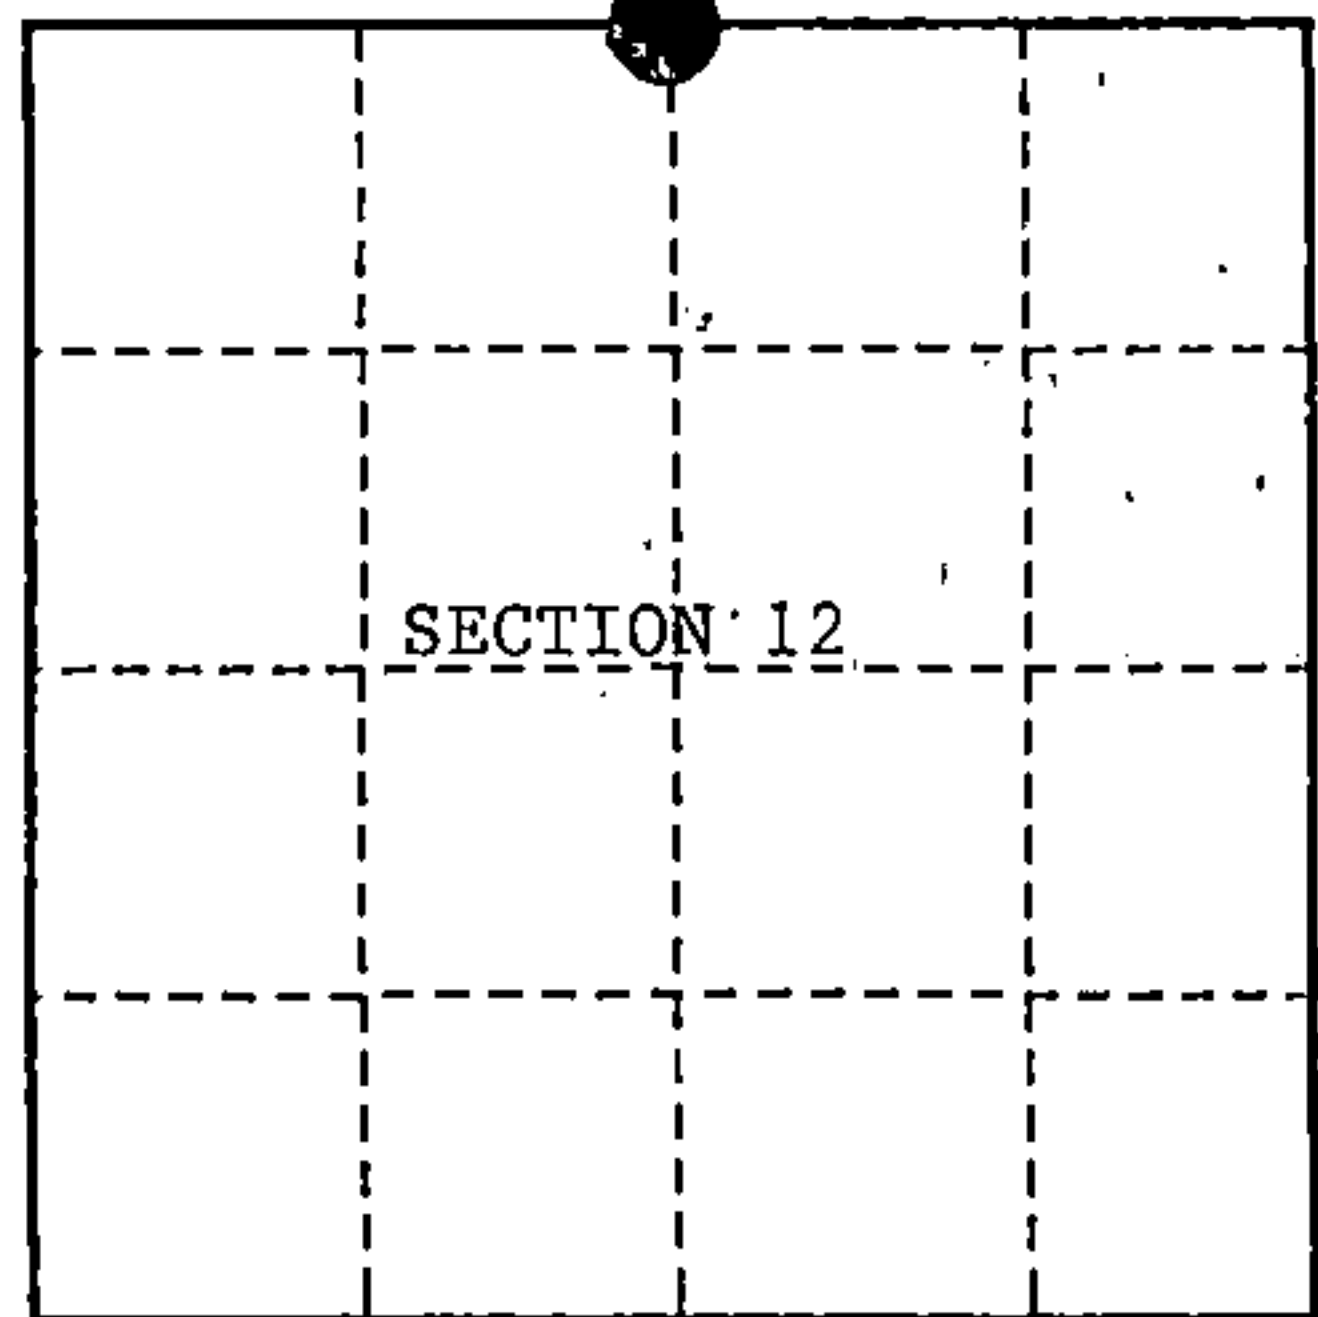


- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1858, James McBride set a wood post and maked the following BTs: Cedar, 8", N.28°E., 13 links; Black Ash, 10", S.43°E., 5 links.
In 1927, Goodman Company found 2½" Cedar post set by Wells Company in swamp. They set a flue pipe 34", 10" high. Found references as follows (no bearing marks): Cedar stump, 16", S.52°E., 11 links; Birch stump, 12", S.65°E., 4 links; Tamarack stump, 13", S.16°E., 14 links.
In 1936, J. Hammes found 1½" iron pipe and put location poster on a Cedar, 8", S.78°W., distance not listed.
In 1969, J. Resvick found iron pipe alongside 3" x 3" squared wood post. Location poster on 8" Cedar with Hammes' initials.
In 1975, J. Resvick returned to corner and found an unstamped brass capped monument set in place of pipe and post by unknown person.
In 1987, A. Harrison found corner as per Resvick and the remains of the stumps found by Goodman Company. Stamped monument cap and made new references.
In 1998, Alan Harrison, R.L.S., found monument and B.T.s as described. Cut down SE and SW B.T.s for G.P.S. observation; made new B.T.s: Black Ash, 6", N.52°E., 33.62 feet, Black Ash, 8", S.04°E., 43.06 feet.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. Brass Cap Monument stamped to identify corner.
2. Black Ash, 6", N.52°E., 33.62 feet (NBT)
3. Black Ash, 8", S.04°E., 43.06 feet (NBT)
4. Cedar, 14", N.24°W., 48.63 feet
5. Steel Sign Post, Northeast, 0.90 feet

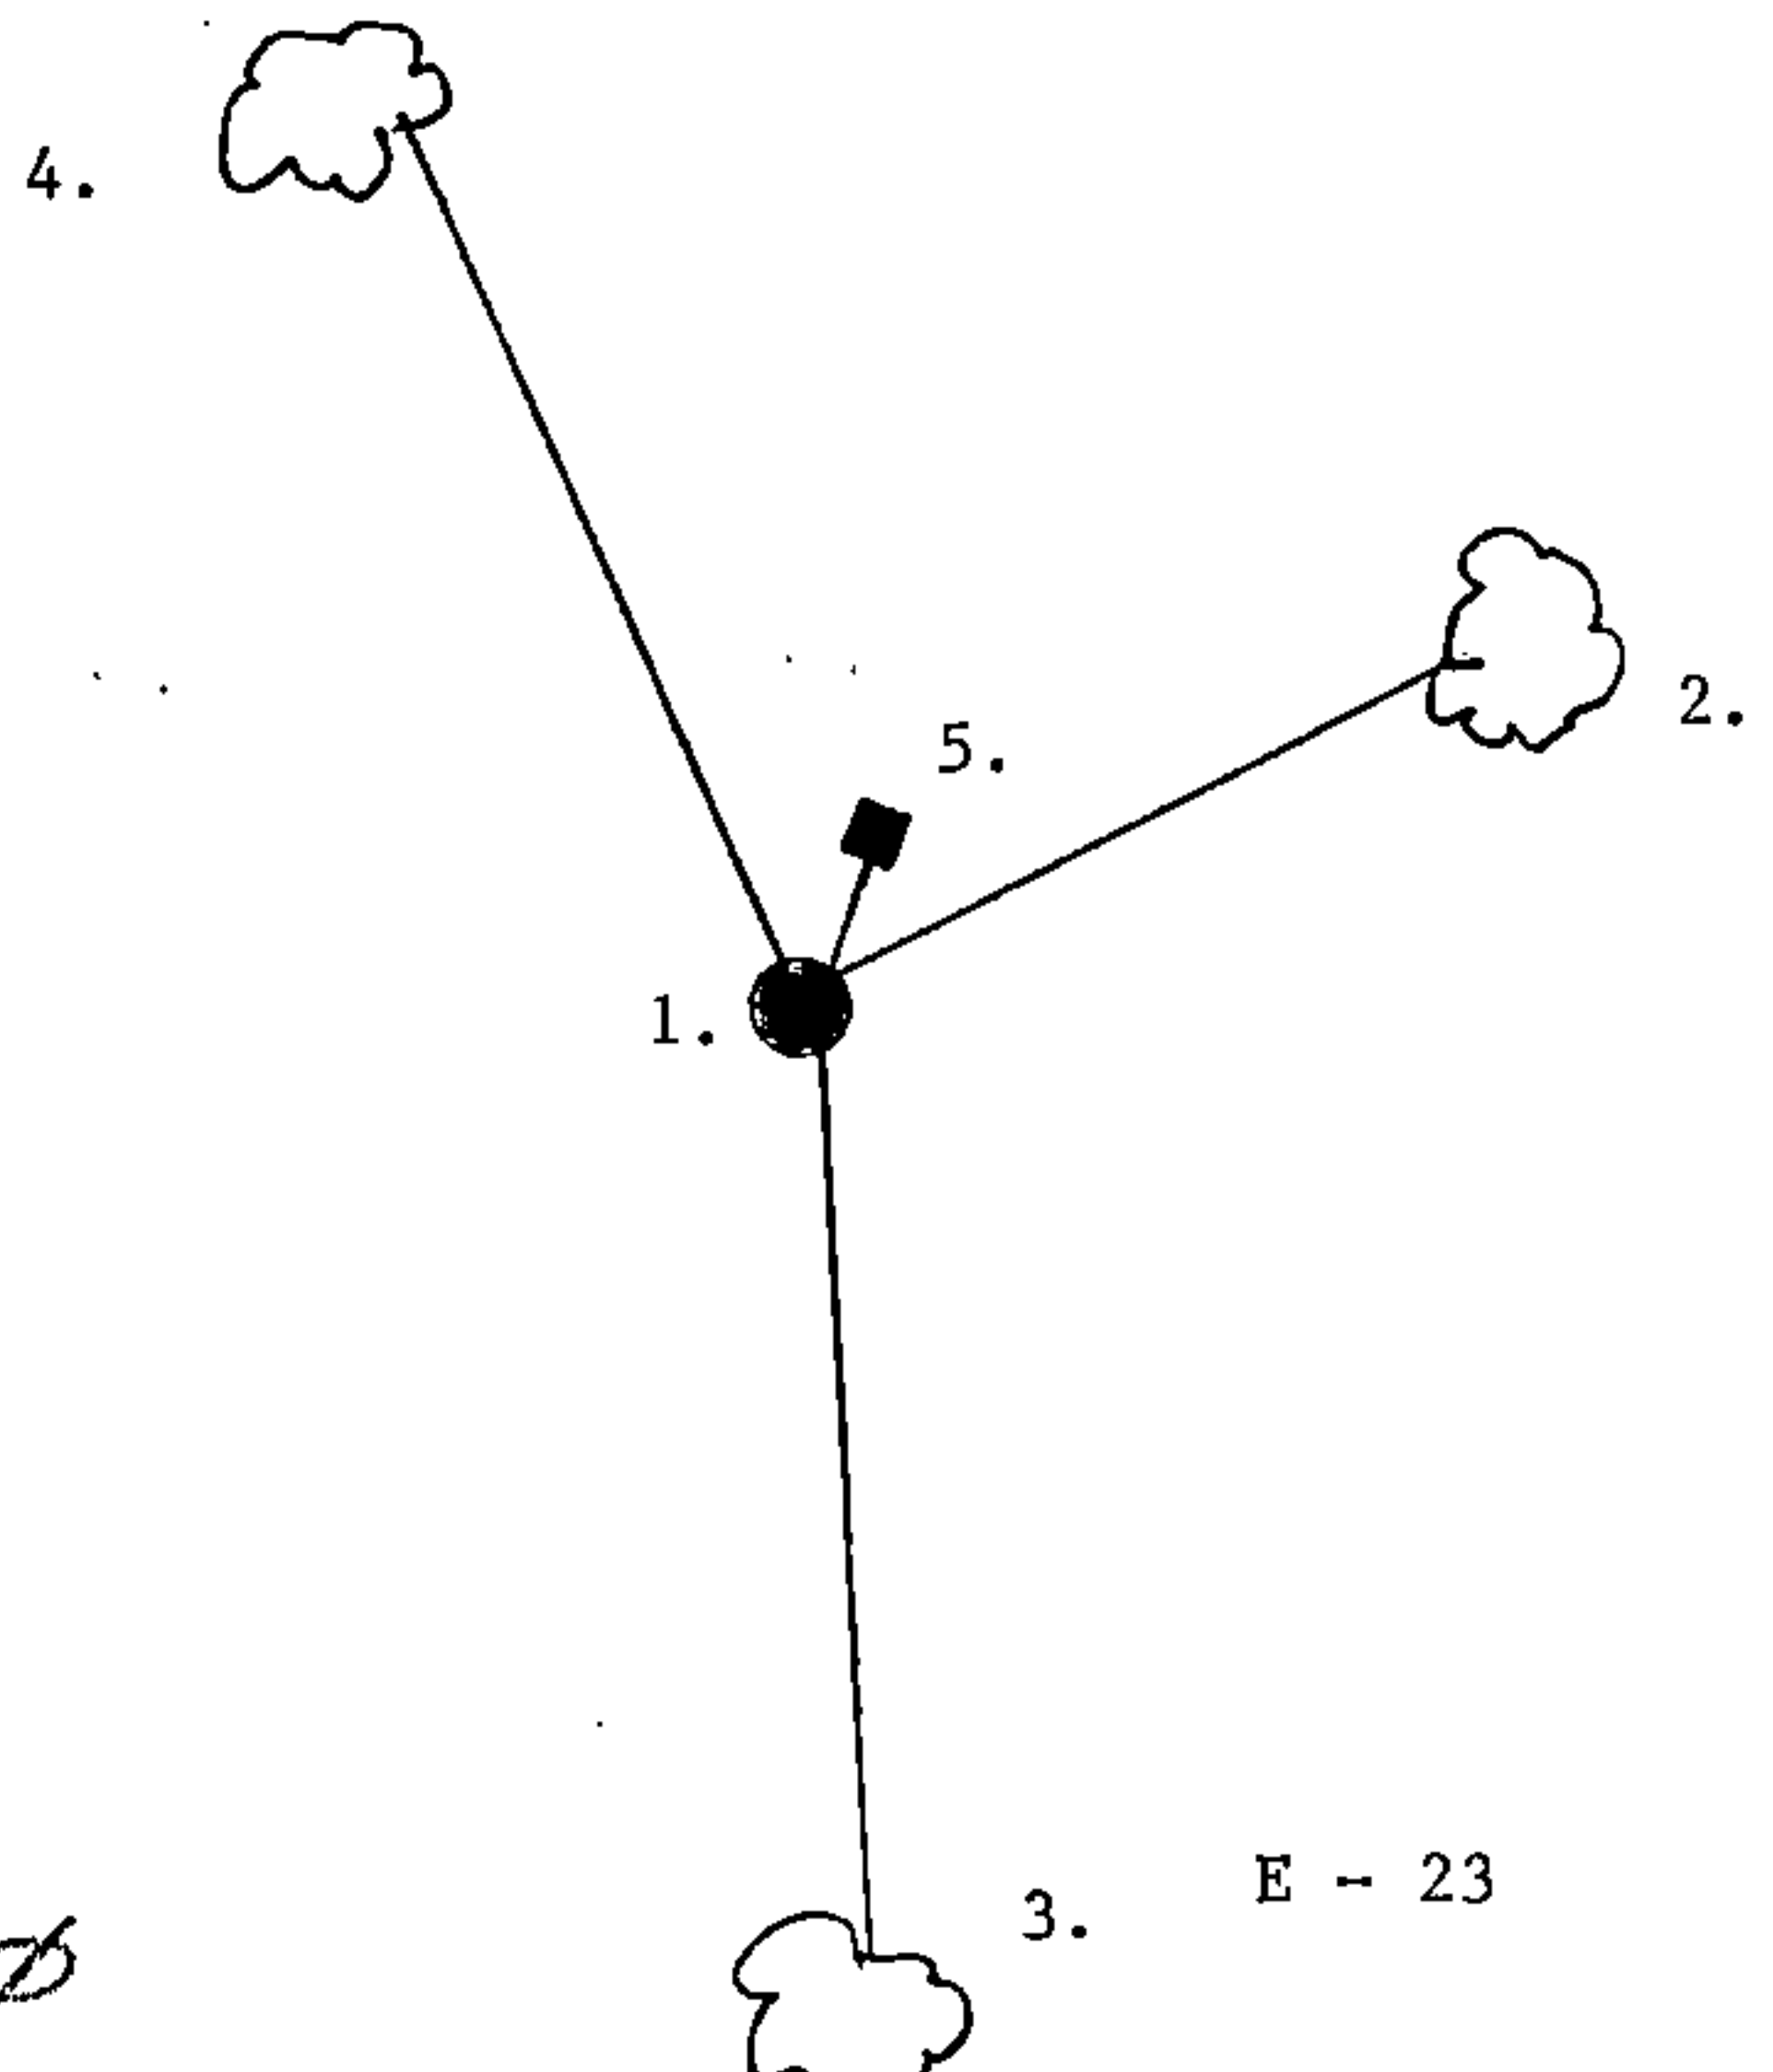

- (e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2)

- (g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No


- (1) I, Alan D. Harrison
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature

Date

CERTIFICATE READY FOR FILING:

District Ranger

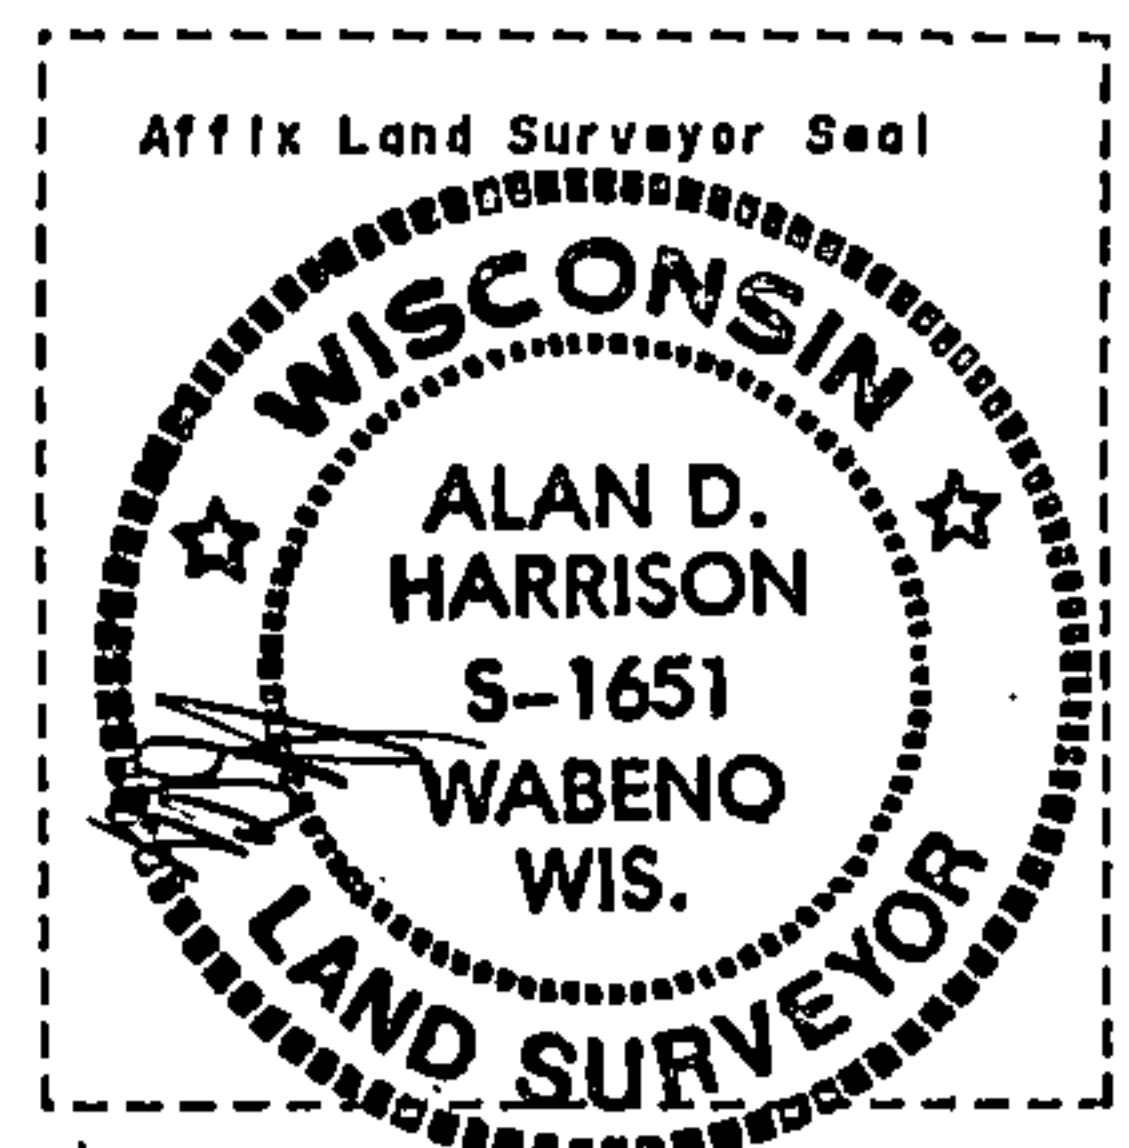


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.

● = Corner monument restored.

Quarter Corner common to Sections 1-12, T.35N., R.16E., Forest County, Wisconsin.

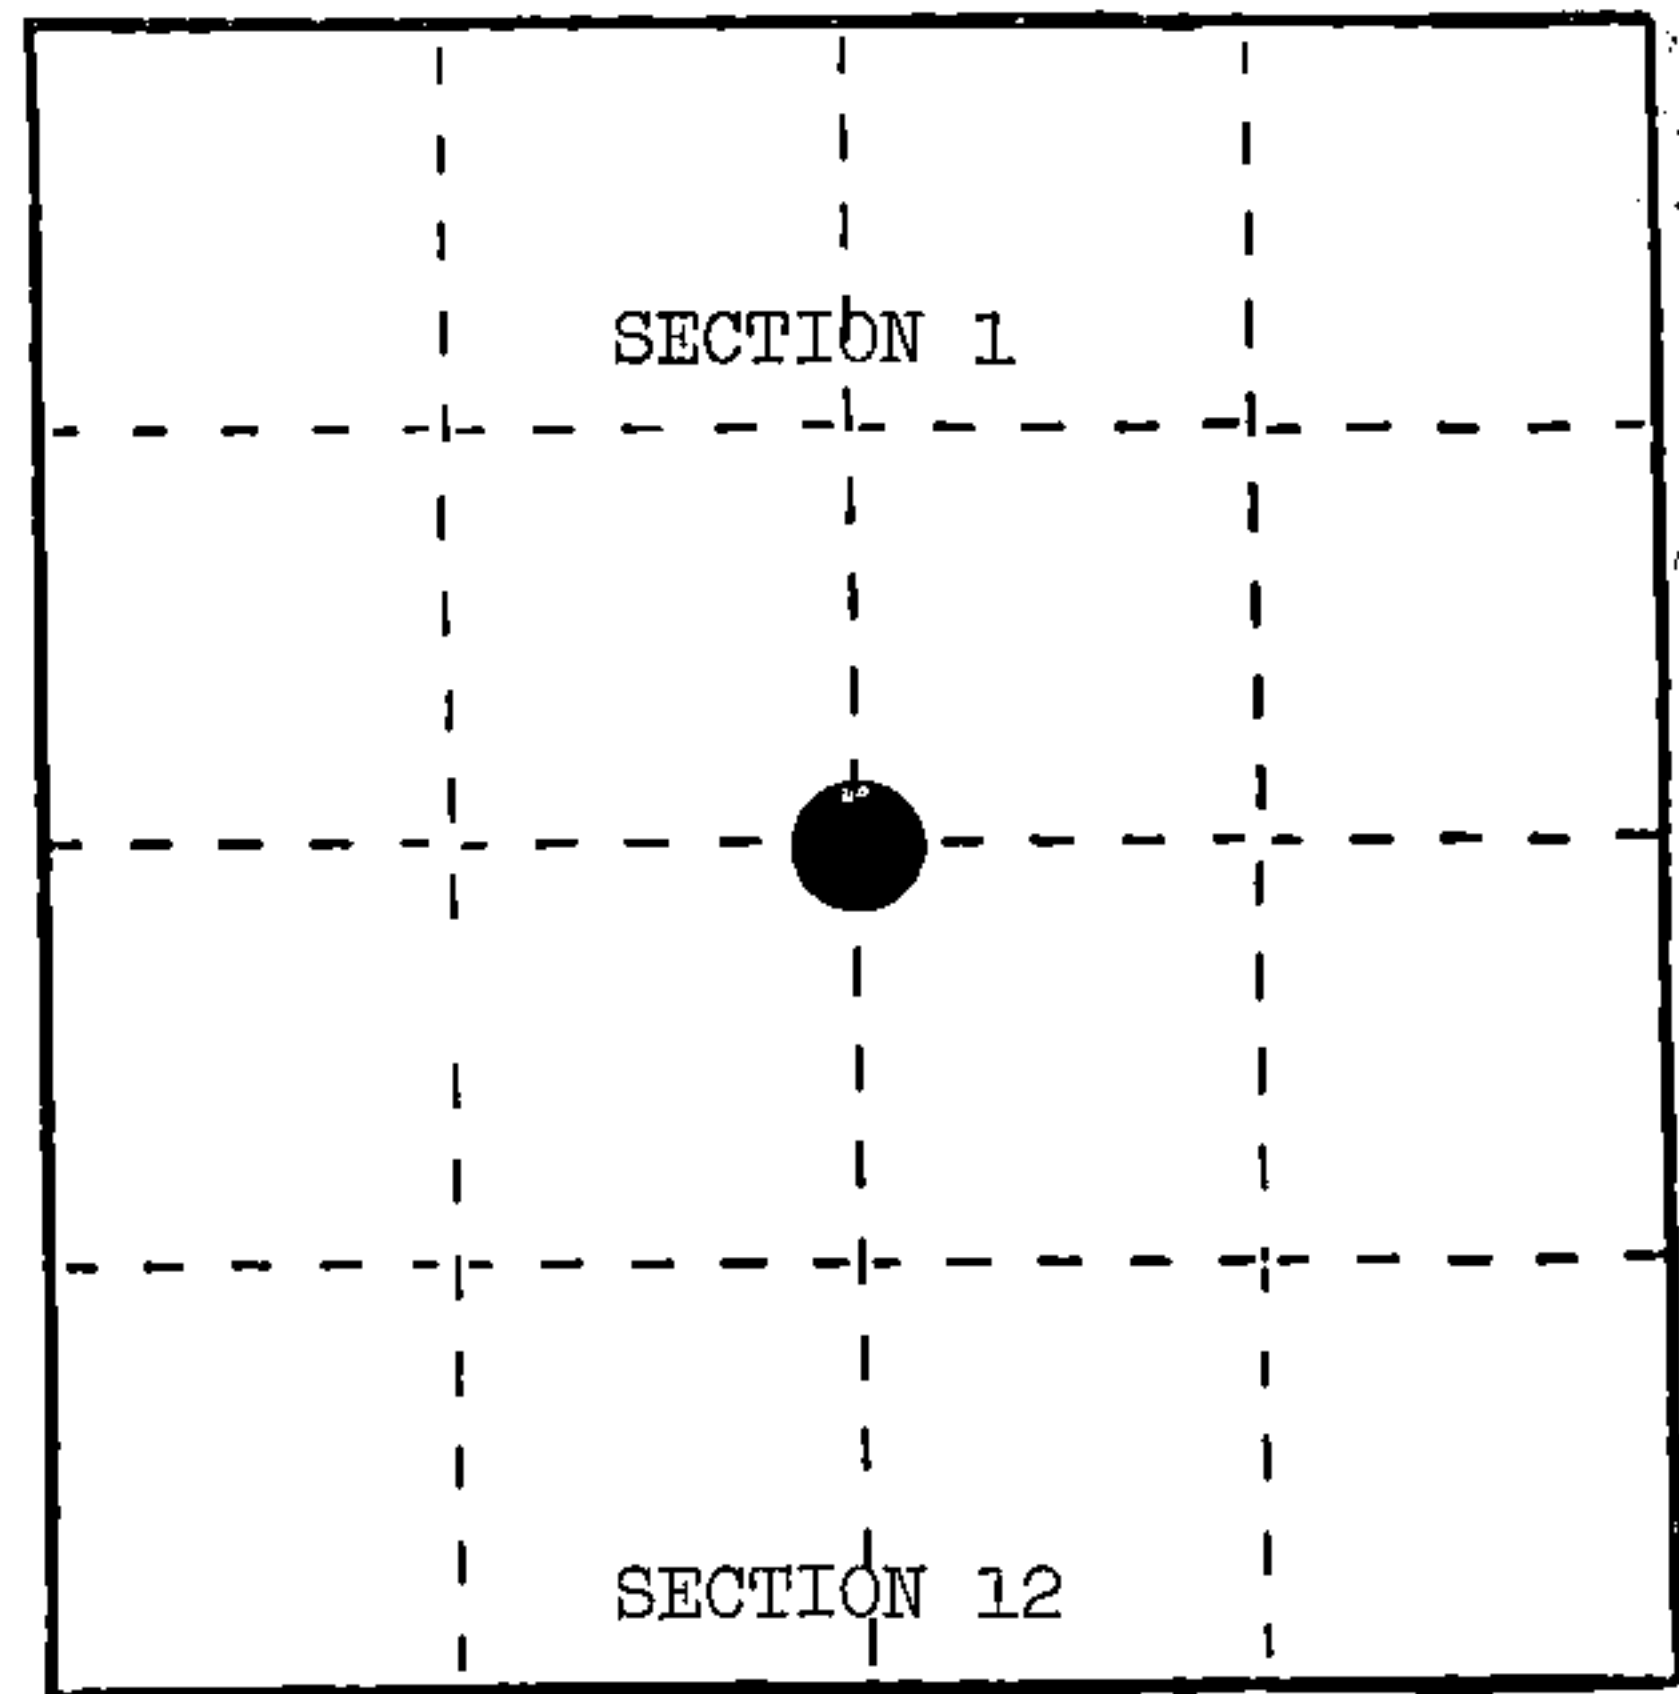

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1858, James McBride set a wood post and made the following BTs: Cedar, 8", N.28°E., 13 links; Black Ash, 10", S.43°E., 5 links.

In 1927, Goodman Company found 2½" Cedar post set by Wells Company in swamp. They set a flue pipe 34", 10" high. Found references as follows (no bearing marks): Cedar stump, 16", S.52°E., 11 links; Birch stump, 12", S.65°E., 4 links; Tamarack stump, 13", S.16°W., 14 links. In 1936, J. Hammes found 1½" iron pipe and put location poster on a Cedar, 8", S.78°W., distance not listed.

In 1969, J. Resvick found iron pipe alongside 3" x 3" squared wood post. Location poster on 8" Cedar with Hammes' initials.


In 1975, J. Resvick returned to corner and found an unstamped brass capped monument set in place of pipe and post by unknown person.

In 1987, A. Harrison found corner as per Resvick and the remains of the stumps found by Goodman Company. Stamped monument cap and made new references.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.) Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. Brass capped monument stamped to identify corner location.
2. Black Ash, 8", S.11°E., 16.30 feet
3. Cedar, 7", S.23°W., 17.50 feet
4. Cedar, 14", N.24°W., 48.63 feet
5. Steel Sign Post, Northeast, 0.90 feet

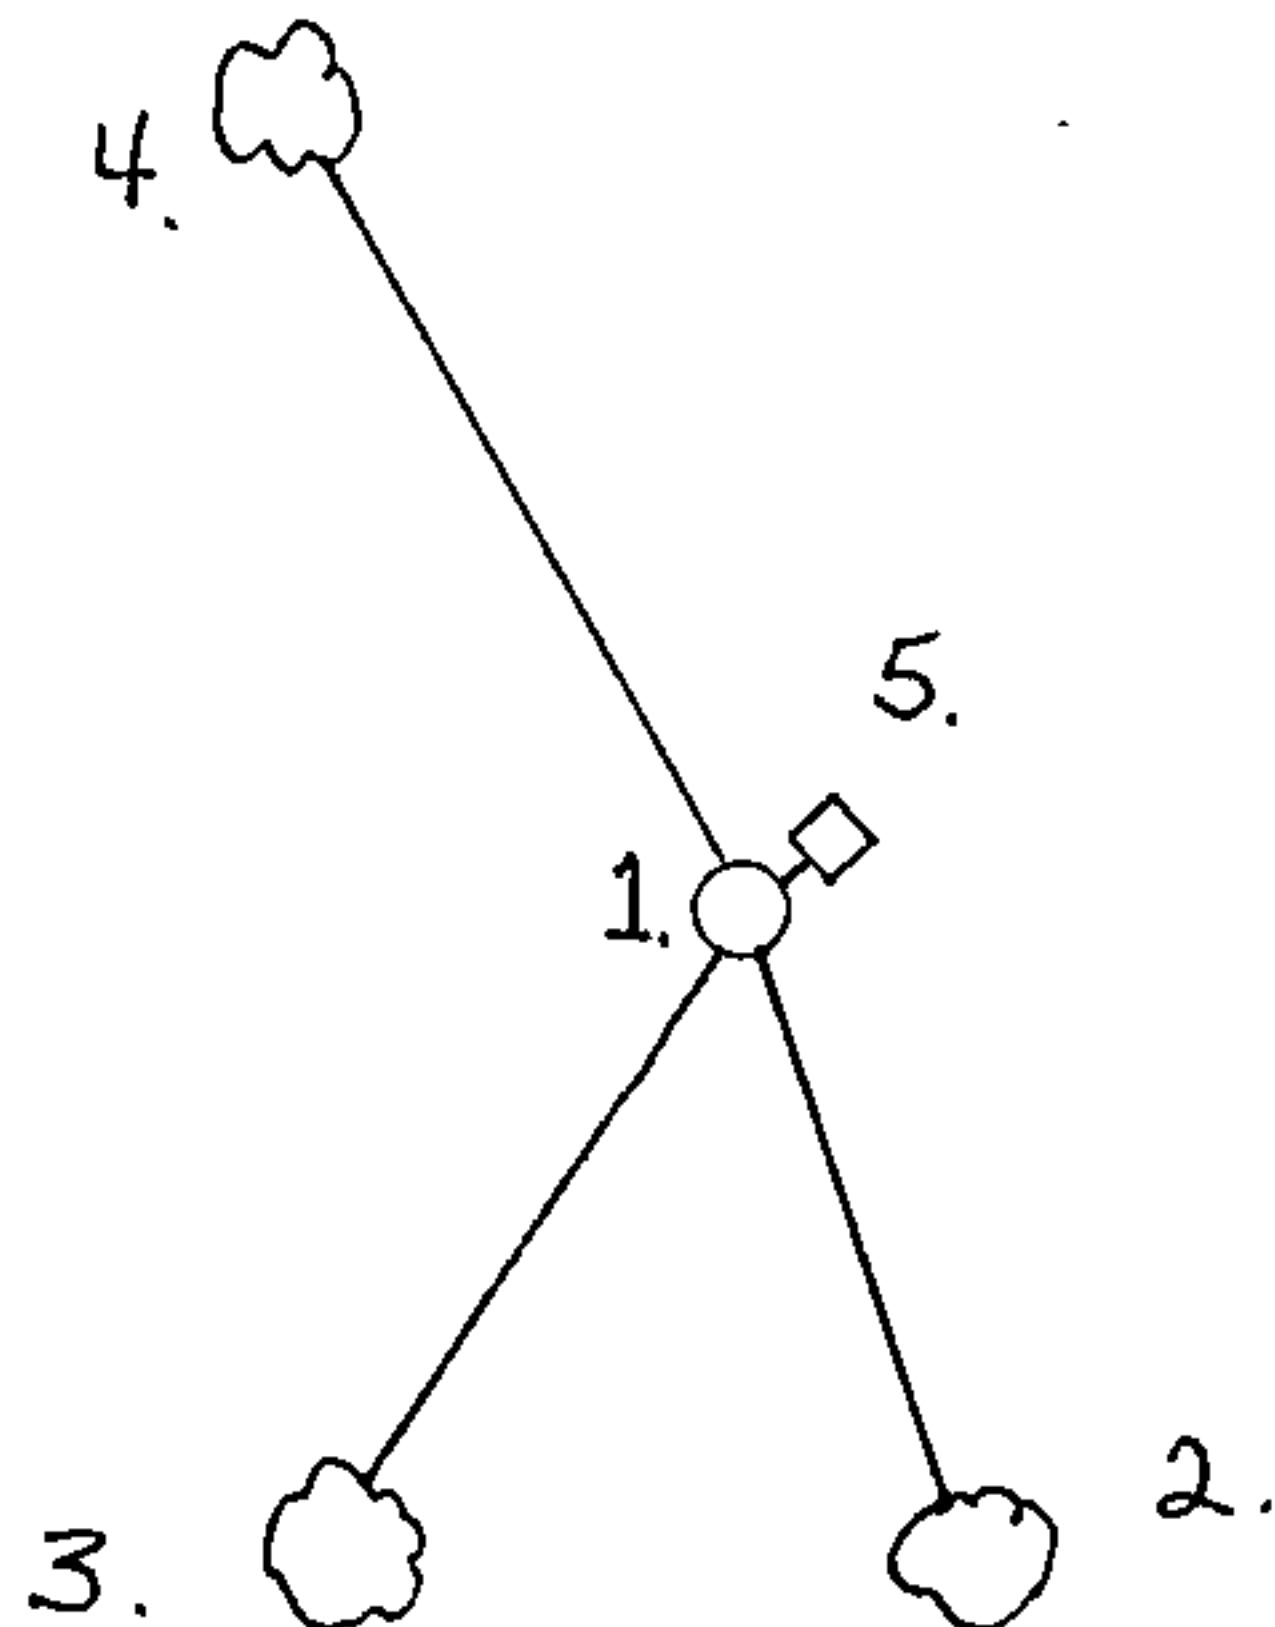

Book 1, Page 29

REGISTER'S OFFICE
Forest County, Wis.

Received for record this 26th day of February, 1990 at 10:10 o'clock A.M. and recorded in Vol. E-23 page 43

CORNER RESTORATIONS

page 43

Paul Scheffner
Register of Deeds

E-23

43516010020

E 23

- (e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None.

- (f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2) a found perpetuated location.


- (g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No.

- (i) I, Alan D. Harrison
(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison 2/20/90
Signature Date

Certificate ready for filing: Dale Steg
District Ranger

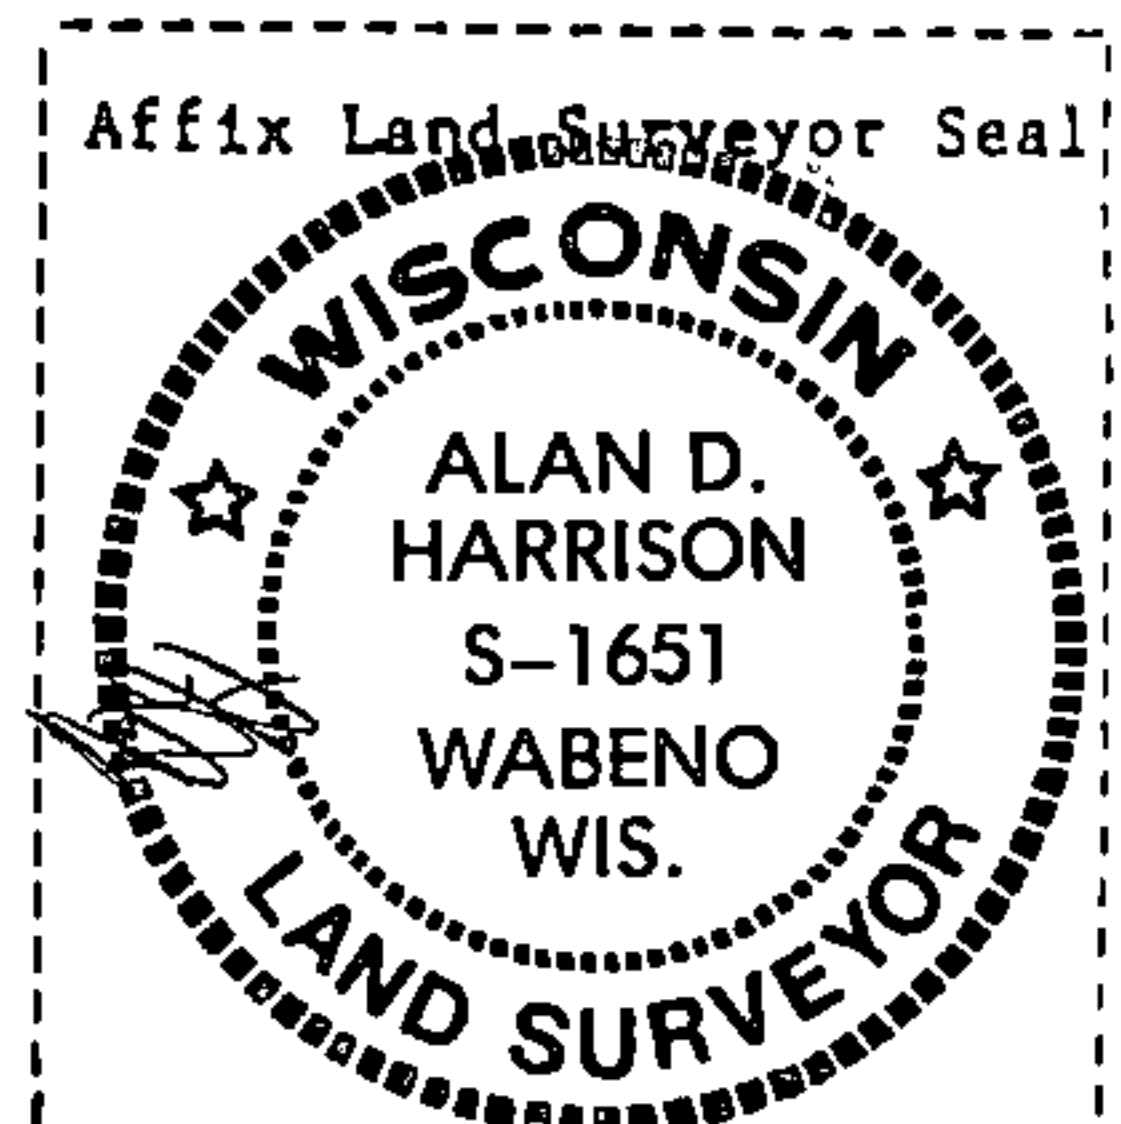

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).


- (a) Identify the corner by reference to the U.S. public land survey system.

○ = Corner monument restored.

Quarter Corner to Sections 1 and 12, T.35N., R.16E.

REGISTER'S OFFICE
Forest County, Wis.
Received for record this 17th day
of February A.D., 1988 at
10:00 o'clock AM and recorded
in Vol. CORNER RESTORATIONS
page E-23

Paul H. Schenck
Register of Deeds

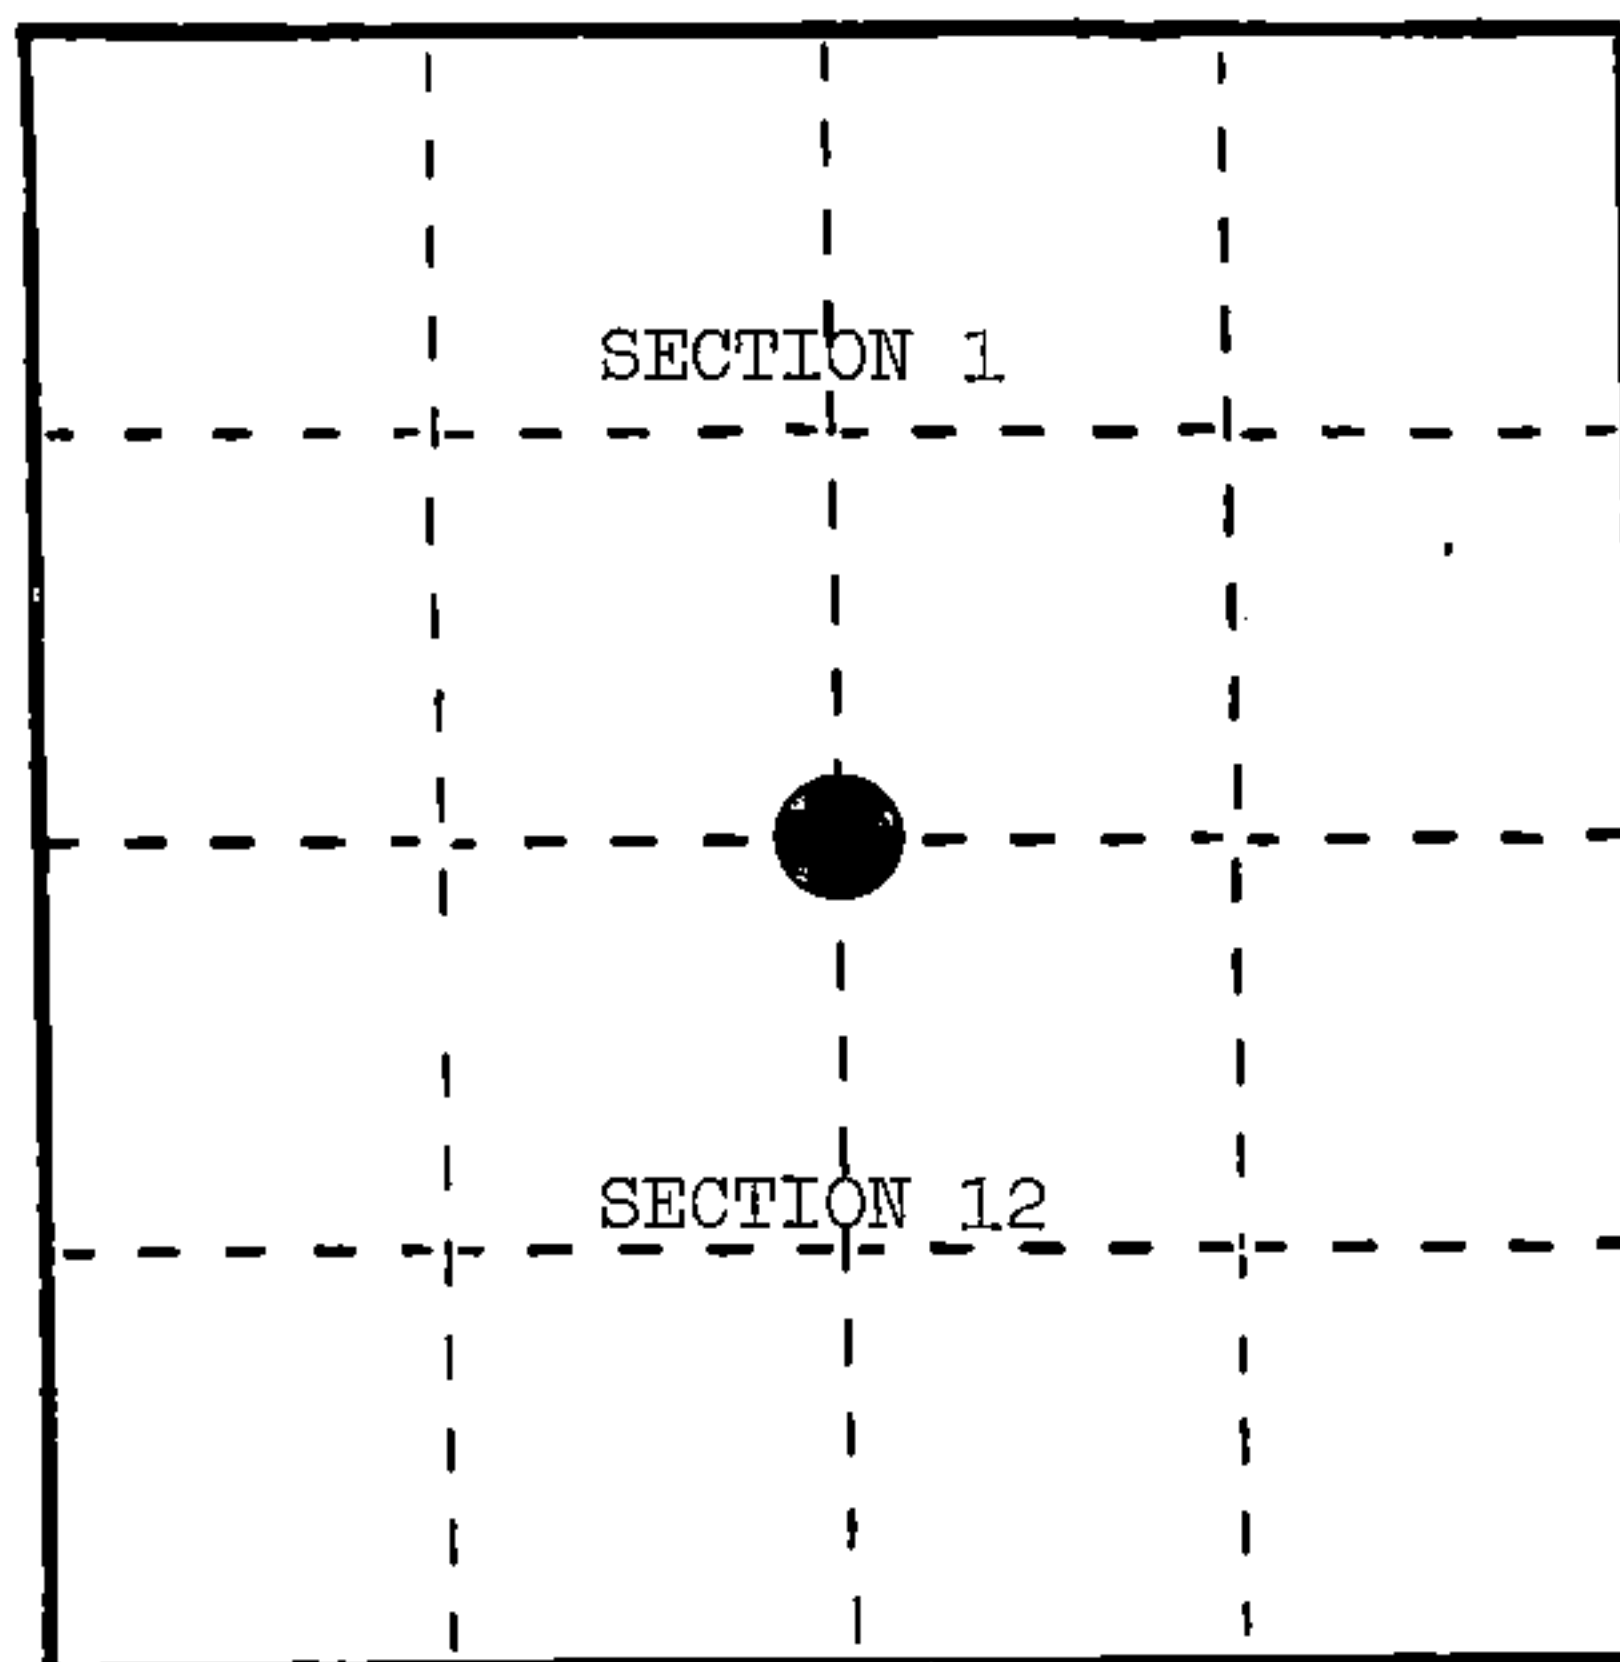

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

In 1858, James McBride set post with the following BTs: Cedar, 8", N.28°E., 13 links; Black Ash, 10", S.43°E., 5 links.

In 1927, Goodman Co. found a 2½" Cedar post set by Wells Co. Set 3½" flue pipe 10" high. Had no trees with bearing marks but had the following: Cedar Stump, 16", S.52°E., 11 links; Birch Stump, 12", S.65°E., 4 links; Tamarack Stump, 13", S.16°W., 14 links.

In 1936, John Hammes found a 1½" iron pipe and placed a metal location poster on the east side of an 8" Cedar.

In 1969, Jean Resvick found 1½" iron pipe alongside a 3" x 3" squared Cedar post and a Forest Service location poster on an 8" Cedar 28 chains west of corner.


In 1975, Jean Resvick and Tom Tallier found an unstamped monument set in place with iron pipe and post alongside.

In 1987, Alan Harrison and Tom Tallier found monument as per Resvick and Tallier in 1975. They stamped the cap and made accessories to it.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)
Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. Aluminum monument with cap stamped to identify the corner.
2. Ash, 8", S.11°E., 16.30 feet
3. Cedar, 7", S.23°W., 17.50 feet
4. Cedar, 14", N.24°W., 48.63 feet
5. Steel Sign Post, 6', Northeast, 0.90 feet

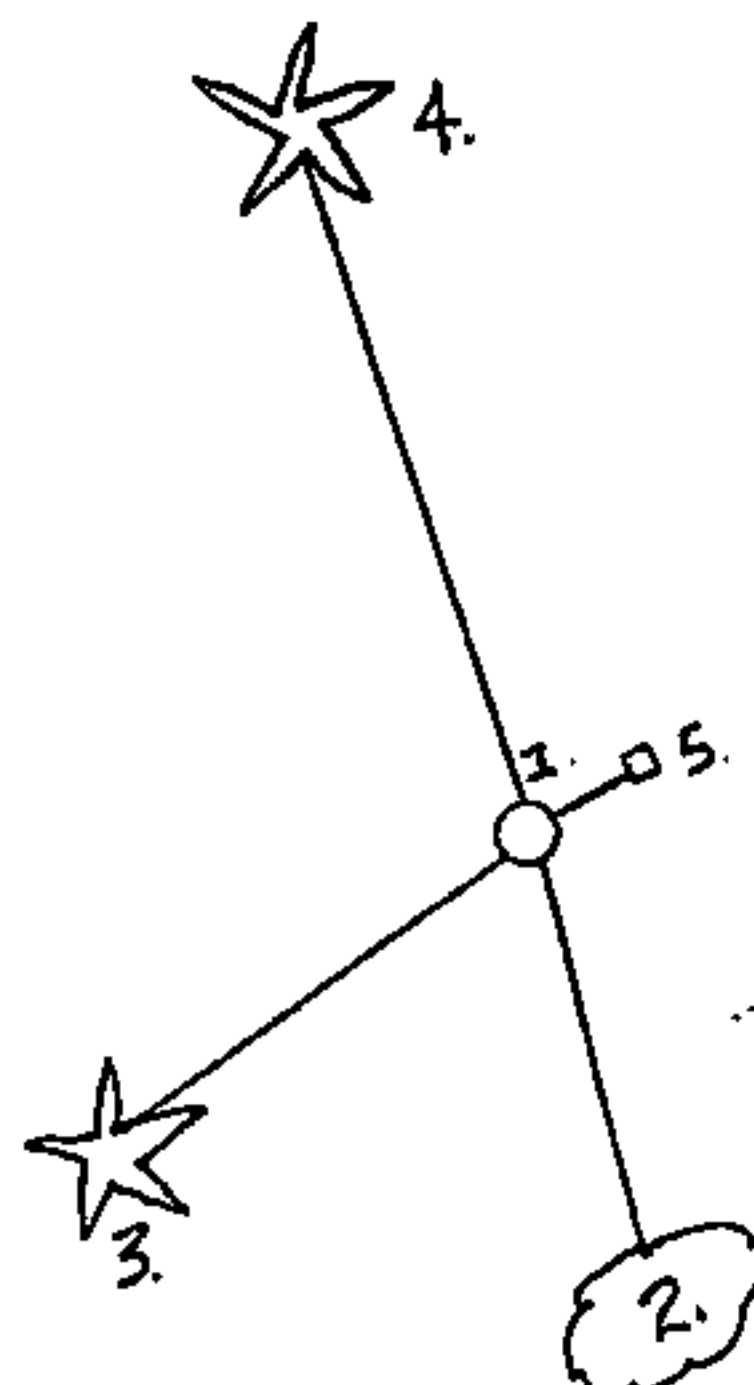

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2) a found perpetuated location.

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No.

(1) I, Alan D. Harrison
(Type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison 2/11/88
Signature Date

