

178486


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall
Include all of the following nine elements (a through I).

- (a) Identify the corner by
reference to the U.S.
public land survey system.
○ = Corner monument restored.

Standard Corner between sections 36 and 31, T.41N. R.12-13E.,
Forest County, Wisconsin

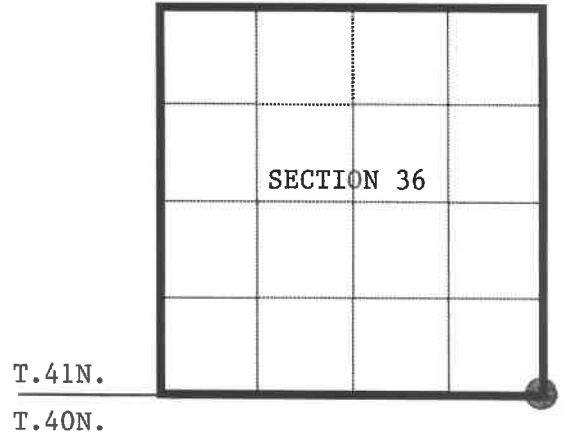

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material
evidence you considered, and whether the monument was found or placed.

Original Government Survey in 1859 by Artemas Curtis. At 80.00 chains, set wood post, from which the
Following bear; Yellow Birch, 17", N71°W., 14 links, Sugar, 12", N.28°E., 27 links.


Dependent Resurvey in 1941 by Guy R. Veal. From remains of original bearing trees, set a concrete
Monument, 2 feet long, 6 inches in diameter, 18 inches in the ground, with a brass cap stamped; S.C.
T.41N., R.12E., R.13E., S.36, S.31, 1941. Blazed and scribed the following; Maple, 7", N.87°E.,
44 links, Maple, 10", S.60°E., 62 links, Maple, 7", S.24°W., 23 links, Hemlock, 7", N.60°W., 101 links.

On 6-19-98 Alan D. Harrison, R.L.S. with the U.S. Forest Service, found the monument as described
Above and a Hemlock, 15", N.60°W., 66.70 feet. Blazed and scribed new bearing trees as noted below.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or If the location is within a
municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other
equally durable material.)

- (d) Show a plan view drawing depicting the
relevant monuments and reference ties
which is sufficient in detail to enable
accurate relocation of the corner monument
if the corner monument is disturbed.
Indicate north.

- 1.) 6 inch diameter concrete monument stamped
to identify corner
- 2.) Sugar, 6", N.41°E., 28.72 ft.(New B.T.)
- 3.) Sugar, 10", S.43°E., 45.82 ft.(New B.T.)
- 4.) Sugar, 16", S.38°W., 28.60 ft.(New B.T.)
- 5.) Hemlock, 15", N.60°W., 66.70 ft.
- 6.) Steel Sign Post, Northeast, 0.75 ft.

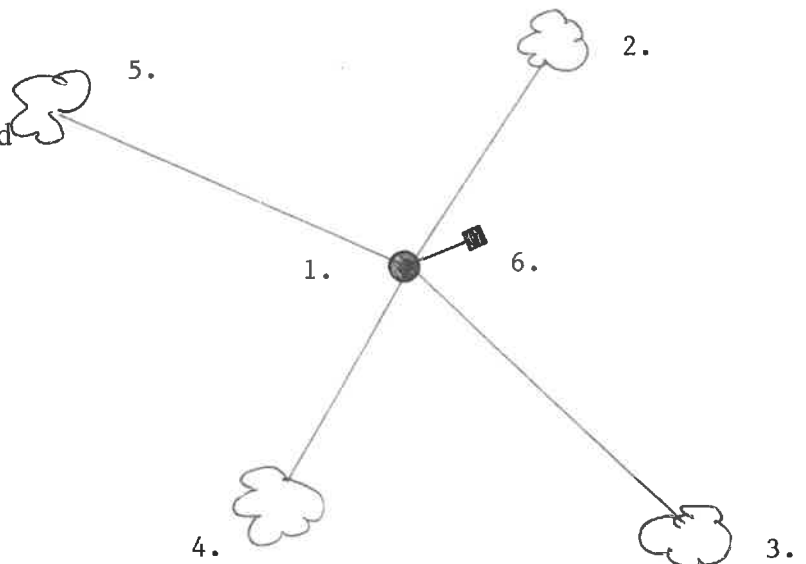

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(2) A found perpetuated location.

No

Signature Alan D. Harrison Date 4/18/01

CERTIFICATE READY FOR FILING: _____
District Ranger

