

Stock No. 26273




FOREST CO SURVEYOR
FILE # 341525 - 1987
DATE BY

SHEET 1 OF 4

PLAT OF SURVEY

U.S. GOVERNMENT LANDS

BEING THE N.E. 1/4 AND EAST 1/2, S.E. 1/4: SECTION 25, TOWNSHIP 34 NORTH, RANGE 15 EAST, FOURTH PRINCIPAL MERIDIAN, FOREST COUNTY, WISCONSIN

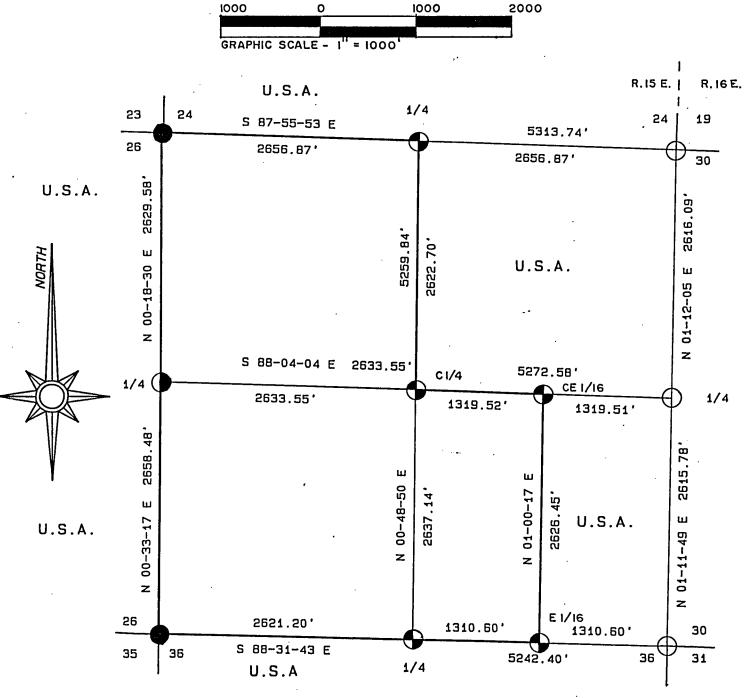

LEGEND_

2 1/2" X 36" ALUMINUM MONUMENT SET THIS SURVEY. 2 1/2" X 60" ALUMINUM MONUMENT SET THIS SURVEY. 2" IRON PIPE WITH BRASS CAP FOUND IN PLACE. MARKED BOUNDARY LINE OF U.S. GOVERNMENT LANDS.

2 1/2" ALUMINUM MONUMENT FOUND IN PLACE.

CONVERSION FACTOR

. .

FEET TO METERS = 0.304801 METERS TO FEET = 3.280833

SURVEY NOTES

This survey was made by the U. S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners on the perimeter of Section 25, for establishing subdivisional corners within Section 25, and for locating and marking the boundaries of U. S. Government land on their perimeter and within Section 25, Township 34 North, Range 15 East, Fourth Principal Meridian, Forest County, Wisconsin.

The U. S. Government lands in this section were acquired in 1934.

The original Government subdivision survey of this township was made in 1839, 1857, and 1858.

The corner positions recovered, restored, and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhinelander, Wisconsin.

CORNERS RECOVERED OR RESTORED

- 1. Corner Common to Sections 24-19-30-25, T.34N., R.15-16E.

 Corner monumented by M. Stefan, R.L.S. Certificate on file in Forest County.
- 2. Corner Common to Sections 25-30-31-36, T.34N., R.15-16E.

 Corner monumented by A. Harrison, R.L.S., on previous survey. Certificate on file in Forest County.
- 3. Corner Common to Sections 25-26-35-36, T.34N., R.15E.

 Corner monumented by M. Stefan, R.L.S. Certificate on file in Forest County.
- 4. Corner Common to Sections 23-24-25-26, T.34N., R.15E.

 Corner monumented by J. Resvick, R.L.S. Certificate on file in Forest County.
- 5. Quarter Corner Common to Sections 25-30, T.34N., R.15-16E.

 Corner monumented by A. Harrison, R.L.S., on previous survey. Certificate on file in Forest County.
- 6. Quarter Corner Common to Sections 25-36, T.34N., R.15E.

 Corner restored by single proportionate measure between section corners one-half mile east and west.

 Corner References:

Sugar	6"	N.76°E.	40.16 feet
Sugar	9" ·	s.73°W.	8.99 feet
Sugar	6"	N.24°W.	2.03 feet
Steel Sign Post		East	1.34 feet



Stock No. 26273

Sheet 3 of 4

7. Quarter Corner Common to Sections 25-26, T.34N., R.15E.

Corner found marked by old post with top broken off, in swamp one-half chain north of swamp edge.

Corner References:

Sugar	9"		s.4°E.	40.97	feet
Hemlock	13"		s.69°W.	48.67	${ t feet}$
Black Spruce	8"	:	N.52°W.	7.09	${ t feet}$
Steel Sign Post			North	1.40	feet

8. Quarter Corner Common to Sections 24-25, T.34N., R.15E.

Corner restored by single proportionate measure between section corners one-half mile east and west.

Corner References:

Sugar	10"	N.88°E.		32.73	feet
Sugar	12"	s.3°E.	•	18.98	feet
Hemlock	12"	N.75°W.		7.79	${ t feet}$
Steel Sign Post	t	Southeast		0.85	feet

CORNERS ESTABLISHED

1. Center Quarter Corner to Section 25.

Corner established at the intersection of the one-quarter lines of Section 25.

Corner References:

Sugar	16"	N.74°E.	35.07	${ t feet}$
Sugar	7"	S.33°E.	20.38	feet
Sugar	12"	s.27°W.	21.24	${ t feet}$
Steel Sig	n Post	Northeast	1.20	feet

2. East Sixteenth Corner Common to Sections 25-36.

Corner established midpoint and on line between the south one-quarter corner and the southeast section corner of Section 25.

Corner References:

Sugar	10"	N.79°E.		46.35	feet
Sugar	8"	s.42°W.		40.16	feet
Sugar	8"	s.83°w.		5.00	feet
Steel Sign 1	Post	Southeast	. •	1.17	feet

3. Center East Sixteenth Corner to Section 25.

Corner established midpoint and on line between the east one-quarter corner and the center one-quarter corner of Section 25.

Corner References:

Sugar	713		s.89°E.	5.64	feet
Butternut	7"		s.22°W.	13.32	feet
Sugar	6"	. •	N.36°W.	55.50	feet
Steel Sign Post			North	0.75	${ t feet}$

· 装在 1961 建磷酸铁矿类和 1 作品的医预防的



Stock No. 26273

Sheet 4 of 4

SURVEYOR'S AFFIDAVIT

State of Wisconsin County of Forest

SS

I, Alan D. Harrison, Land Surveyor, USDA, Forest Service, and a registered surveyor in the State of Wisconsin, hereby certify that I have surveyed and subdivided Section 25, Township 34 North, Range 15 East, Fourth Principal Meridian, State of Wisconsin.

The plat map and the notes herewith are a correct representation of the land surveyed and divided. I have surveyed and subdivided said section in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.



Date of Survey: 1987

Land Surveyor, USDA, Forest Service R.L.S., State of Wisconsin Certificate S-1651

Plat ready for filing:

District Ranger

