

Stock No. 26273

Page 2 of 4

SURVEY NOTES

This survey was made by the U. S. Department of Agriculture, Forest Service, for the purpose of restoring and establishing corners on the perimeter of Section 10, for establishing subdivisional corners within Section 10, and for locating and marking the boundaries of U. S. Government land on their perimeter and within Section 10, Township 35 North, Range 16 East, Fourth Principal Meridian, Forest County, Wisconsin.

The U. S. Government lands in this section were acquired in 1936.

The original Government subdivision survey of this township was made in 1858.

The corner positions recovered, restored and established by this survey are marked by the monument described in the map legend.

The corner positions established were located to an accuracy of one part in 3000.

The bearings between corner positions are true bearings as determined by solar observations.

The field notes of this survey and a copy of this plat are on file in the Forest Supervisor's Office at Rhinelander, Wisconsin.

CORNERS RECOVERED OR RESTORED

1. Corner Common to Sections 2, 3, 10, and 11.
Found brass capped monument set by Jean Resvick, R.L.S., in 1973. Certificate on file in Forest County.
2. Corner Common to Sections 3, 4, 9, and 10.
Found 2½" aluminum monument set by Alan Harrison, R.L.S., in 1984. Certificate on file in Forest County.
3. Corner Common to Sections 9, 10, 15, and 16.
Corner restored by retracement of Goodman Company survey of 1928.
Corner References:

Reference Monument		South	7.63 feet
Sugar	8"	N.28°E.	42.97 feet
Sugar	15"	S.54°E.	24.20 feet
Sugar	14"	S.01°W.	23.53 feet
Sugar	5"	N.59°W.	62.98 feet
Steel Sign Post		South	7.03 feet
4. Corner Common to Sections 10, 11, 14, and 15.
Found brass capped monument set by Jean Resvick, R.L.S., in 1978. Certificate on file in Forest County.
5. Quarter Corner to Sections 3 and 10.
Found 2½" aluminum monument set by Alan Harrison, R.L.S., in 1987. Certificate on file in Forest County.
6. Quarter Corner to Sections 9 and 10.
Found 2½" aluminum monument set by Alan Harrison, R.L.S., in 1984. Certificate on file in Forest County.

Stock No. 26273

Page 3 of 4

7. Quarter Corner to Sections 10 and 11.

Found brass capped monument set by Jean Resvick, R.L.S., in 1975.
Certificate on file in Forest County.

8. Quarter Corner to Sections 10 and 15.

Corner restored by single proportion between section corners 1/2 mile
East and West.

Corner References:

Reference Monument		North	34.90 feet
Sugar	8"	S.52°E.	46.61 feet
Sugar	10"	S.30°W.	65.74 feet
Steel Sign Post		North	35.72 feet
Steel Sign Post		South	7.96 feet

CORNERS ESTABLISHED1. South One-Sixteenth to Sections 10 and 11.

Corner established midpoint and on line between the southeast corner
and the east quarter corner of Section 10.

Corner References:

Sugar	7"	N.53°E.	6.87 feet
Basswood	18"	S.43°E.	22.82 feet
Sugar	9"	N.62°W.	21.85 feet
Steel Sign Post		North	1.36 feet
Iron Pipe	1½"	N.83°E.	84.15 feet

2. North One-Sixteenth to Sections 10 and 11.

Corner established midpoint and on line between the northeast corner
and the east quarter corner of Section 10.

Corner References:

Sugar	9"	S.08°E.	18.70 feet
Sugar	7"	S.80°W.	4.78 feet
Steel Sign Post		Northeast	0.95 feet

3. North One-Sixteenth to Sections 9 and 10.

Corner established midpoint and on line between the northwest corner
and the west quarter corner of Section 10.

Corner References:

Sugar	5"	N.50°E.	30.24 feet
Sugar	12"	N.55°W.	6.01 feet
Steel Sign Post		Southwest	0.93 feet
Iron Pipe	2"	S.30°E.	2.50 feet

4. Center East One-Sixteenth to Section 10.

Corner established midpoint and on line between the center quarter corner
and the east quarter corner of Section 10.

Corner References:

Sugar	6"	N.42°E.	24.11 feet
W. Ash	6"	S.58°E.	16.66 feet
Steel Sign Post		North	0.86 feet



Stock No. 26273

Page 4 of 4

5. Center North One-Sixteenth to Section 10.

Corner established midpoint and on line between the center quarter corner and the north quarter corner of Section 10.

Corner References:

Basswood	11"	S.38°W.	21.37 feet
Sugar	16"	N.29°W.	16.61 feet
Steel Sign Post		Southeast	0.96 feet

6. Northeast One-Sixteenth to Section 10.

Corner established at the intersection of the north and east one-sixteenth lines of Section 10.

Corner References:

B. Cherry	10"	S.19°W.	52.50 feet
B. Cherry	6"	S.82°W.	65.14 feet
Steel Sign post		Northwest	0.59 feet
Iron Pipe	1½"	N.69°W.	78.20 feet

7. Southeast One-Sixteenth to Section 10.

Corner established at the intersection of the south and east one-sixteenth lines of Section 10.

Corner References:

Sugar	4"	S.51°E.	16.04 feet
Sugar	11"	S.82°W.	24.92 feet
Steel Sign Post		Southwest	0.60 feet
Iron Pipe	1½"	S.33°W.	36.22 feet

SURVEYOR'S AFFIDAVIT

State of Wisconsin] SS
County of Forest]

I, Alan D. Harrison, Land Surveyor, U.S.D.A. Forest Service and a Registered Land Surveyor in the State of Wisconsin, do hereby certify that I have surveyed and subdivided Section 10, Township 38 North, Range 16 East, Fourth Principal Meridian, State of Wisconsin.


The plat map and the notes herewith are a correct representation of the land surveyed and divided. I have surveyed and subdivided said section in accordance with the rules for survey of the public lands and with the statutes of the State of Wisconsin.



Alan D. Harrison
Land Surveyor, USDA, Forest Service
R.L.S., State of Wisconsin
Certificate S-1651

Plat ready for filing:

Date of Survey: 1989

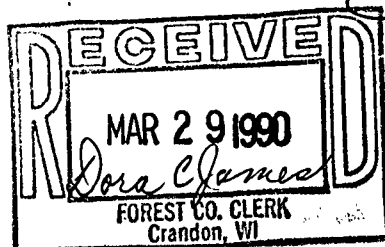

Dora James
District Ranger