

430115 0000 2023

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

HISTORY OF ORIGINAL CORNER ESTABLISHMENT AND SUBSEQUENT RESTORATION AND DESCRIPTION OF ANY RECORD, MONUMENT OCCUPATIONAL, TESTIMONIAL OR OTHER EVIDENCE CONSIDERED:

THE ORIGINAL CORNER WAS SET BY BRADLEY IN 1854 WITH THE ORIGINAL BEARING TREES OF:

13" MAPLE N24°E 36 LINKS
12" MAPLE S67°E 12 LINKS

1978 KELLY FOUND A STONE WITH CHISELED X UNDER AN IRON PIPE AND SET A 1.5" PIPE AS THE SECTION CORNER
2023 I LOCATED THIS CORNER PRIOR WHILE DOING WORK IN SECTION 15. I SET A BERNTSEN NAIL BASED ON THAT PRIOR WORK

● = LOCATION OF CORNER


	15		

SECTION 15
TOWNSHIP 30 NORTH, RANGE 11 EAST
TOWN OF ROLLING
LANGLADE COUNTY, WISCONSIN

CORNER WAS: (CHECK ALL THAT APPLY)

- ☐ RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION
☒ RESTORED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION
☐ CONSIDERED A LOST CORNER AND REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS (INCLUDE A PLAN VIEW DRAWING SHOWING DISTANCES AND DIRECTIONS TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR PROPORTIONING AND DETERMINING THE CORNER LOCATION)
☐ RESTORED OR REESTABLISHED IN A LOCATION THAT DIFFERS FROM A PREVIOUS RESTORATION OR REESTABLISHMENT (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND)
☐ CHECK IF THERE IS ADDITIONAL INFORMATION ON BACK

DESCRIBE THE MONUMENT AND ACCESSORIES USED TO PERPETUATE THE LOCATION OF THE CORNER. (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND) ALSO INCLUDE FOUR TIES TO THE SECTION CORNER AND DESCRIPTION OF THE TIES.

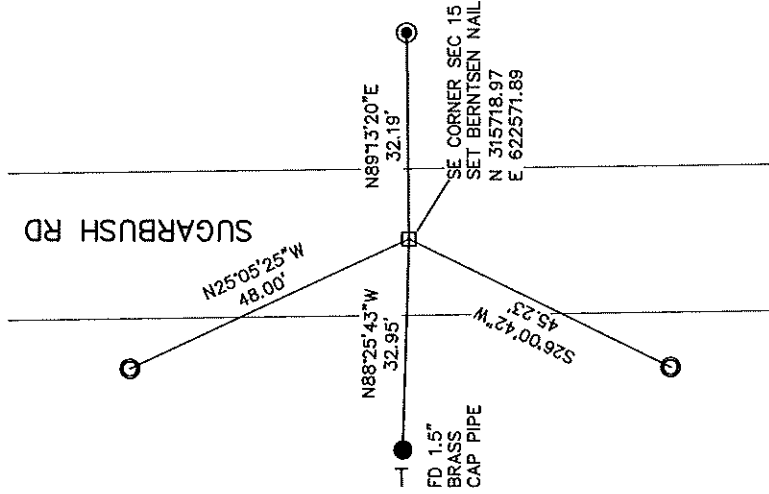

○ SET 3/4" X 30" RE-BAR
WEIGHING 1.50 LBS/FT

● FD 1" I. PIPE

● FD WITNESS MONUMENT

BEARINGS REFERENCED TO
THE LANGLADE COUNTY
COORDINATE SYSTEM

T SET 6 FOOT WHITE T-POST




CHARLEY G. BRINKMEIER

(Type or print name) CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Charley G. Brinkmeier
SIGNATURE

OCT 20 2023
DATE

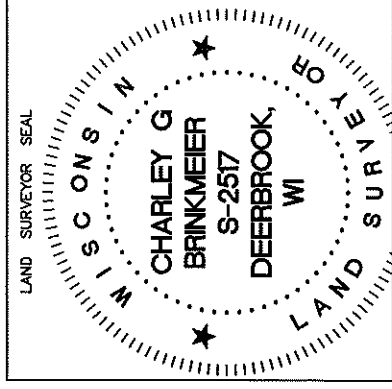

N17 30-11

INDEX NO.

CERTIFIED LAND CORNER RESTORATION


Index No. N-17

State of Wisconsin }
County of LANGLADE } ss.



I WILLIAM F. KELLY, do hereby
certify that on the 14th day
of SEPTEMBER, 1978, I found
evidence of the SOUTH-WEST
corner of SECTION 1A
Township 30, North, Range
11E, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

Description of corner evidence found:
FOUND A WELL POINT WITNESS CORNER.
STONE IN ROAD UNDER I.P. WITH X MARK

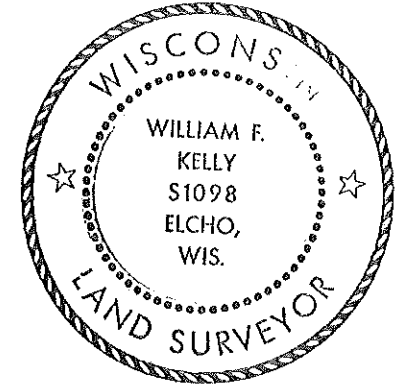

Description of monument and accessories I established to perpetuate the original location of this corner.
SET 1 1/2" X 10" I.P. AS THE SVY SEC. COR.
SEC. 1A, ALSO SET 2" X 42" I.P. WITH
BRASS CAP AS WIT. COR.

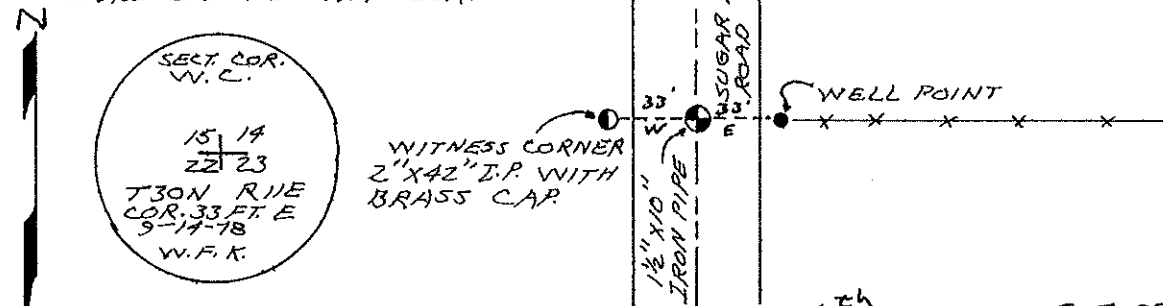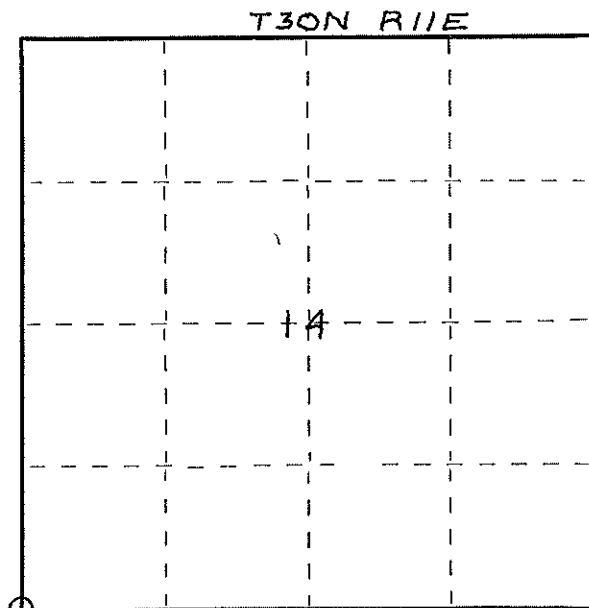

Dated at ELCHO, Wis., this 16th day of SEPT., 1978.

Signature William F. Kelly, Title County Surveyor, Registration No. S-1098
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

○ = Corner monument restored.