

4301133 0020 2023

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

HISTORY OF ORIGINAL CORNER ESTABLISHMENT AND SUBSEQUENT RESTORATION AND DESCRIPTION OF ANY RECORD, MONUMENT OCCUPATIONAL, TESTIMONIAL OR OTHER EVIDENCE CONSIDERED:

THE ORIGINAL CORNER WAS SET BY NEELY IN 1853 WITH THE ORIGINAL BEARING TREES OF:
10" MAPLE N 10°W 15 LINKS
10" MAPLE S 77°E 12 LINKS

SHAWANO CO TIE SHEET SAY THAT THEY FOUND A RR SPIKE AND SET TIES

2023 I FOUND THE BERNTSEN NAIL WITH TIES AND SET AN ADDITIONAL TIE

● = LOCATION OF CORNER

	33		

SECTION 33
TOWNSHIP 30 NORTH, RANGE 11 EAST
TOWN OF ROLLING
LANGLADE COUNTY, WISCONSIN

CORNER WAS: (CHECK ALL THAT APPLY)

- ☐ RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION
- ☒ RESTORED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION
- ☐ CONSIDERED A LOST CORNER AND REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS (INCLUDE A PLAN VIEW DRAWING SHOWING DISTANCES AND DIRECTIONS TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR PROPORTIONING AND DETERMINING THE CORNER LOCATION)
- ☐ RESTORED OR REESTABLISHED IN A LOCATION THAT DIFFERS FROM A PREVIOUS RESTORATION OR REESTABLISHMENT (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND)
- ☐ CHECK IF THERE IS ADDITIONAL INFORMATION ON BACK

DESCRIBE THE MONUMENT AND ACCESSORIES USED TO PERPETUATE THE LOCATION OF THE CORNER. (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND) ALSO INCLUDE FOUR TIES TO THE SECTION CORNER AND DESCRIPTION OF THE TIES.


○ SET 3/4"X 30" RE-BAR
WEIGHING 1.50 LBS/FT

⊙ FD 1" I. PIPE

● FD WITNESS MONUMENT

BEARINGS REFERENCED TO
THE LANGLADE COUNTY
COORDINATE SYSTEM

T SET 6 FOOT WHITE T-POST

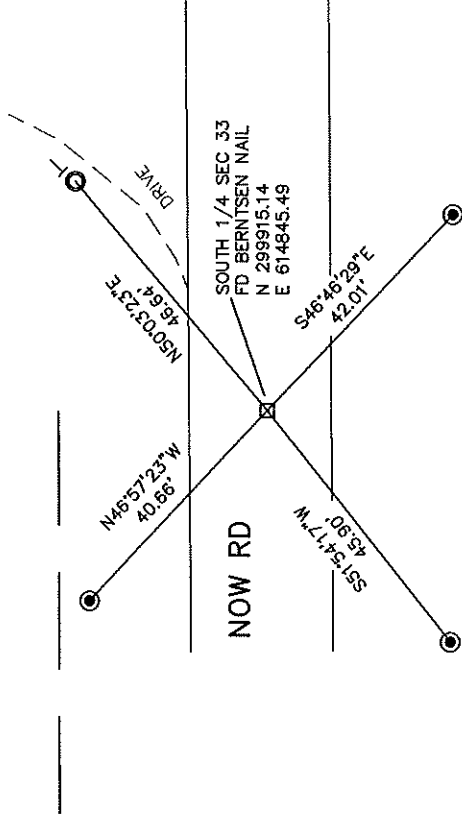


CHARLEY G. BRINKMEIER

(Type or print name) CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Charley G. Brinkmeier
SIGNATURE

OCT 20 2023
DATE

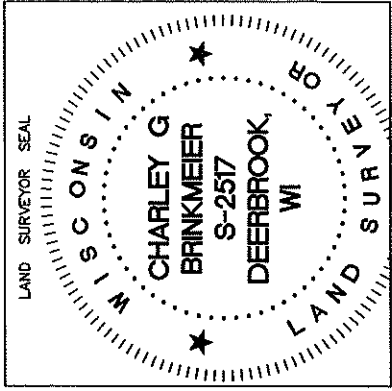

211 30-11
INDEX NO.


430.1133.00.20

FORM 985 H. C. MILLER CO., MILWAUKEE

State of Wisconsin } ss.
County of LANGLADE

I WILLIAM F. KELLY, do hereby
certify that on the 20th day
of DECEMBER, 1982, I found
evidence of the SOUTH 1/4
corner of SECTION 33
Township 30, North, Range
11 EAST, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

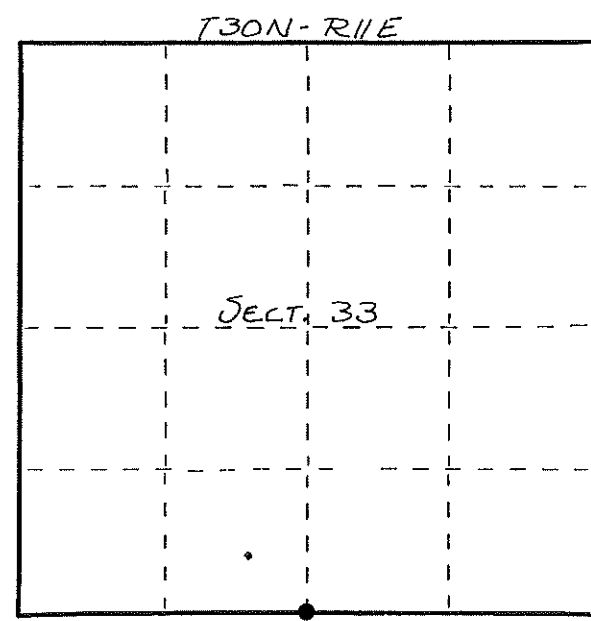


○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

Index No. 2-11


History of original corner establishment:
ORIGINAL CORNER ESTABLISHED BY
WILLIAM T. BRADLEY IN OCT., 1853.

Description of corner evidence found:
CORNER ESTABLISHED AT INTERSECTION
OF EXISTING FENCE LINES & STRAIGHT
LINE BETWEEN SE & SW SECT. CORNERS.
SET R.R. SPIKE IN PAVEMENT AS CORNER.
SET A 3" x 42" ALUMINUM CAP WITNESS
MONUMENT. MARKED 2 BT'S.

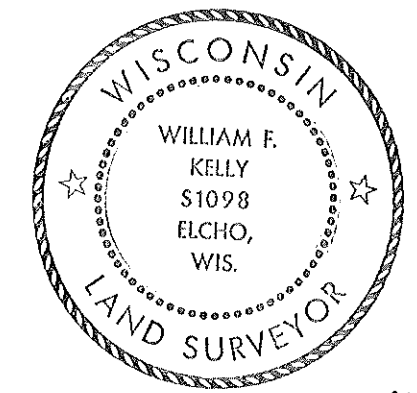

William F. Kelly
12-20-82

Description of monument and accessories I established to perpetuate the original location of this corner.

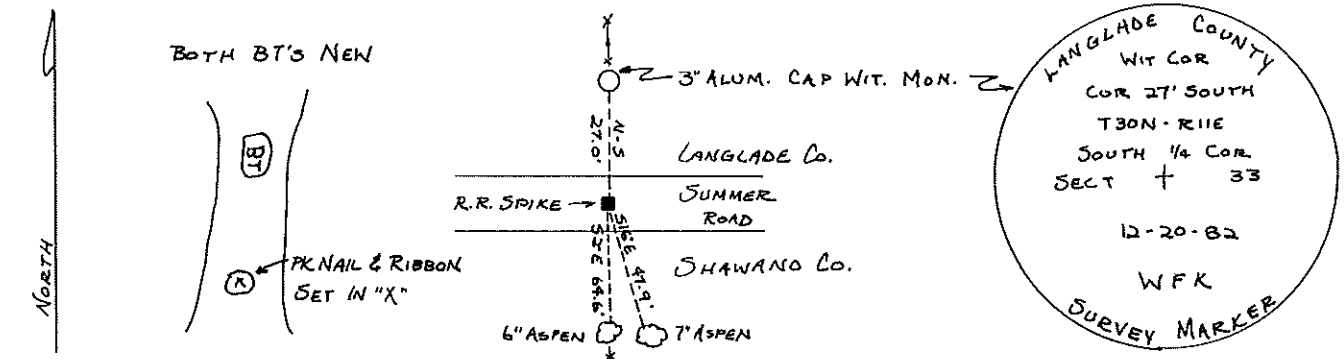

Dated at ELCHO, Wis., this 20th day of DECEMBER, 1982

Signature William F. Kelly Title COUNTY SURVEYOR Registration No. 1098
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy