

4301135 0020 2023

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

HISTORY OF ORIGINAL CORNER ESTABLISHMENT AND SUBSEQUENT RESTORATION AND DESCRIPTION OF ANY RECORD, MONUMENT OCCUPATIONAL, TESTIMONIAL OR OTHER EVIDENCE CONSIDERED:

THE ORIGINAL CORNER WAS SET BY NEELY IN 1853 WITH THE ORIGINAL BEARING TREES OF:
12" BIRCH N49°W 6 LINKS
8" MAPLE S80°E 46 LINKS

1969 POSS RESET THE CORNER AND TIES

2023 I FOUND A 2" PIPE AND SET ADDITIONSL TIES

● = LOCATION OF CORNER

	35		

SECTION 35
TOWNSHIP 30 NORTH, RANGE 11 EAST
TOWN OF ROLLING
LANGLADE COUNTY, WISCONSIN

CORNER WAS: (CHECK ALL THAT APPLY)

- ☐ RESTORED THROUGH ACCEPTANCE OF AN OBLITERATED EVIDENCE LOCATION
- ☒ RESTORED THROUGH ACCEPTANCE OF A FOUND PERPETUATED LOCATION
- ☐ CONSIDERED A LOST CORNER AND REESTABLISHED THROUGH LOST CORNER PROPORTIONATE METHODS (INCLUDE A PLAN VIEW DRAWING SHOWING DISTANCES AND DIRECTIONS TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR PROPORTIONING AND DETERMINING THE CORNER LOCATION)
- ☐ RESTORED OR REESTABLISHED IN A LOCATION THAT DIFFERS FROM A PREVIOUS RESTORATION OR REESTABLISHMENT (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND)
- ☐ CHECK IF THERE IS ADDITIONAL INFORMATION ON BACK

DESCRIBE THE MONUMENT AND ACCESSORIES USED TO PERPETUATE THE LOCATION OF THE CORNER. (INCLUDE A PLAN VIEW DRAWING AND INDICATE WHAT WAS SET AND/OR FOUND) ALSO INCLUDE FOUR TIES TO THE SECTION CORNER AND DESCRIPTION OF THE TIES.


○ SET 3/4"X 30" RE-BAR
WEIGHING 1.50 LBS/FT

● FD 1" I. PIPE

● FD WITNESS MONUMENT

BEARINGS REFERENCED TO
THE LANGLADE COUNTY
COORDINATE SYSTEM

T SET 6 FOOT WHITE T-POST

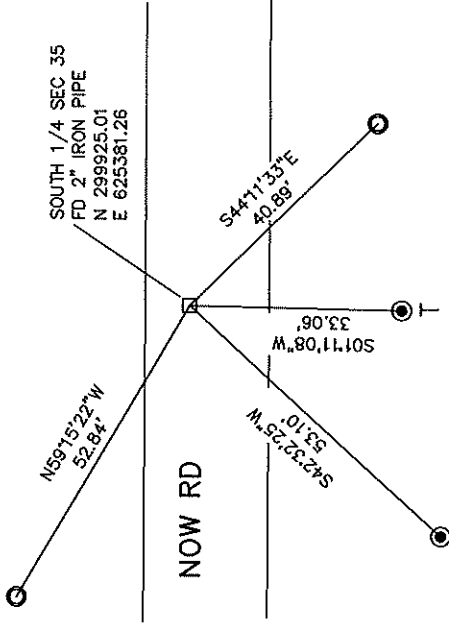


CHARLEY G. BRINKMEIER

(Type or print name) CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Charley G. Brinkmeier
SIGNATURE

OCT 20 2023
DATE

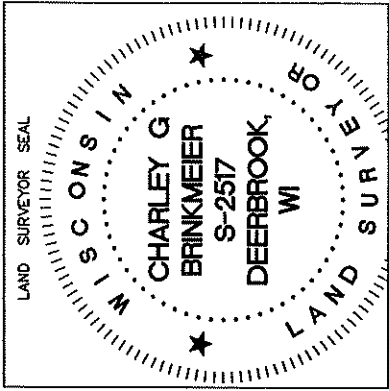

219 30.11

INDEX NO.


430 11 35 00 20

FORM 985 M. C. MILLER CO., MILWAUKEE

State of Wisconsin }
County of LANGLADE } ss.

I ROBERT J. POSS, do hereby
certify that on the 31ST day
of MAY 1, 1969, I found
evidence of the 1/4
corner of SECS 35 & 2
Townships 30 & 29, North, Range
11 EAST, Fourth, Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

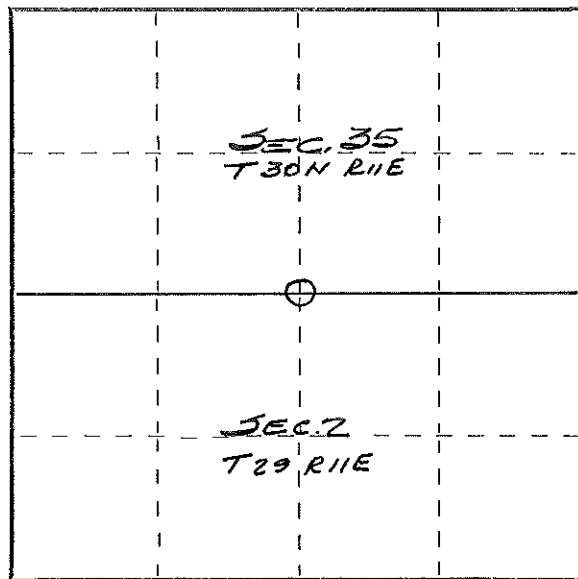

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION


History of original corner establishment:

Description of corner evidence found:

FOUND IRON PIPE ALONG FENCE PREVIOUSLY LOCATED IN PLACE
BY HALLIST. EVIDENTLY GRADER HAD HIT & PULLED OUT PIPE.
FOUND B.T.'S ESTABLISHED BY HALLIST.

Description of monument and accessories I established to perpetuate the original location of this corner.

○ SET BRASS CAP IN CONCRETE MKD WIT. COR.
• FORMER COR.

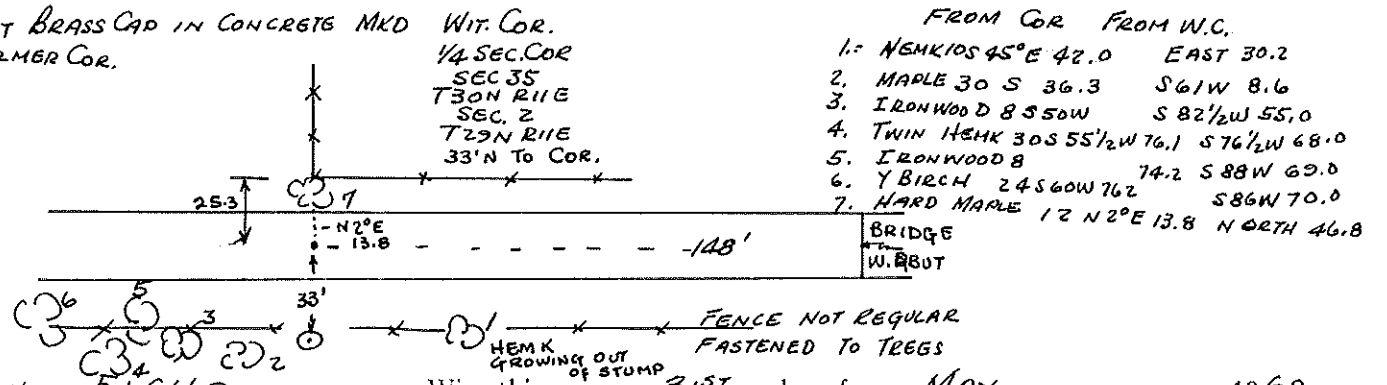

Dated at ELCHO, Wis., this 31ST day of MAY, 1969.

Signature Robert J. Poss Title REG. LAND SURVEYOR Registration No. 5-0001
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

