

4/3/08 24 2000 2024
U.S. PUBLIC LAND SURVEY MONUMENT RECORD

NOTE: THIS FORM IS INTENDED AND DESIGNED TO FULFILL ALL REQUIREMENTS OF WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08, U.S. PUBLIC LAND SURVEY MONUMENT RECORD (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). ADDITIONAL SHEETS MAY BE NECESSARY TO CONFORM TO SAID REQUIREMENTS.


(a) CORNER LOCATION:

EAST 1/4 CORNER, SECTION 24
TOWNSHIP 31 NORTH
RANGE 8 EAST
TOWN OF PINE RIVER
LINCOLN COUNTY
WISCONSIN

(b) HISTORY OF ORIGINAL CORNER:

ORIGINAL SURVEYOR: See Previous Tie Sheet
COMMENCING DATE:
COMPLETION DATE:
ORIGINAL BEARING TREES:

T 31 N, R 8 E





(f)(g)(h) DESCRIPTION OF MONUMENT FOUND AT THIS CORNER AND IF IT WAS ACCEPTED. STATE ALL EVIDENCE (MATERIAL, TESTIMONIAL, OCCUPATIONAL, PLATS, RECORDS, OTHER MONUMENTS) USED AS A BASIS FOR ESTABLISHING LOCATION. IF RE-ESTABLISHING THROUGH LOST CORNER PROPORTIONATE METHODS, INDICATE ALL MONUMENTS, DISTANCES, AND DIRECTIONS USED TO ESTABLISH. INDICATE TYPE OF MONUMENTS FOUND OR SET.

2/14/1975, William Kelly found a frost heaved 6" X 6" Granite Monument and set a 2" Brass Capped Iron Pipe.

8/07/2024, I, Anthony R. Dallman, PLS-2405, found a Brass Capped Iron Pipe, up 16", with a 6" X 6" Granite Monument to the South and leaning Southerly. I accepted this location and set witness monuments, as shown in the sketch below, to further perpetuate the corner location.

(c)(d)(e) PLAN VIEW OF THE CORNER WITH TIES TO AT LEAST FOUR WITNESSES. IF IN DISAGREEMENT WITH PREVIOUSLY ESTABLISHED CORNER, SHOW THE DISTANCES BETWEEN THE TWO CORNERS AND ALSO THE TIES TO THE DISPUTED CORNER.


- Tie bearings by hand-held compass.
- Tie distances by steel tape.
- Not to scale.

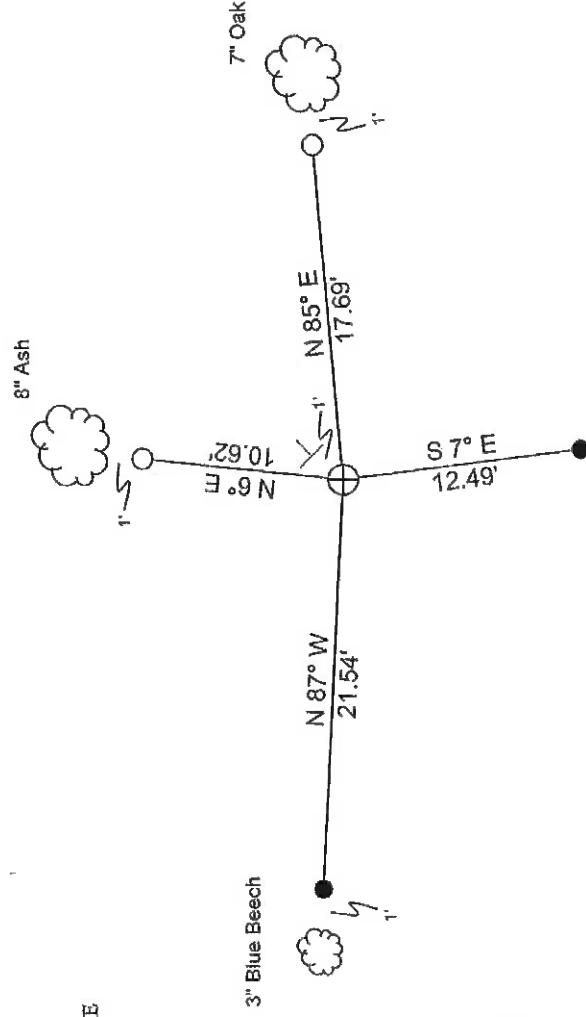

- - Found 7/8" Capped Rebar
- - Set 3/4" Capped Rebar
- └ - Set Vinyl Post

I, ANTHONY R. DALLMAN, WISCONSIN PROFESSIONAL LAND SURVEYOR, S-2405, HEREBY CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS REFERENCED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Anthony R. Dallman 10/14/24
ANTHONY R. DALLMAN, PLS S-2405




PI-31-9
INDEX NO. O-25
LINCOLN CO

43108242000

43108242005
FORM 985 H. C. MILLER CO., MILWAUKEE

State of Wisconsin }
County of LANGLADE } ss.
I WILLIAM F. KELLY, do hereby
certify that on the 14th day
of FEBRUARY, 1925, I found
evidence of the 1/4 SECTION
corner of SECTIONS 24 & 19
Township 31, North, Range
8 & 9 EAST, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:
FREDRICK OHLMANN

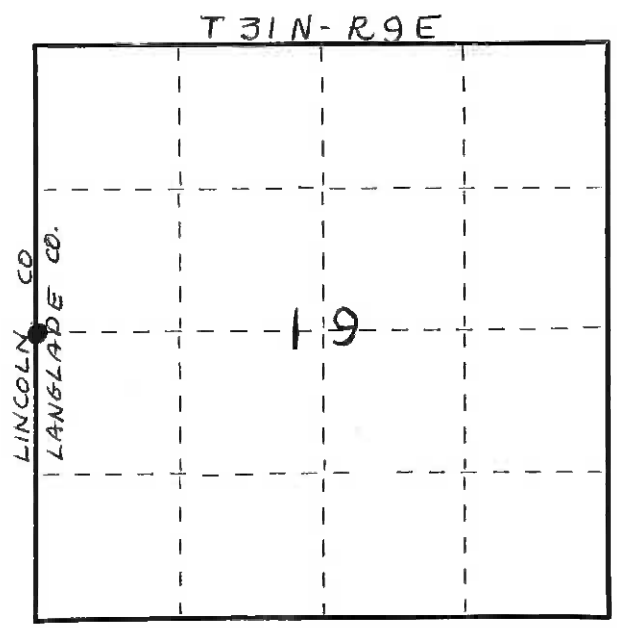


○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

STONE WAS SET IN THE 1920 s.

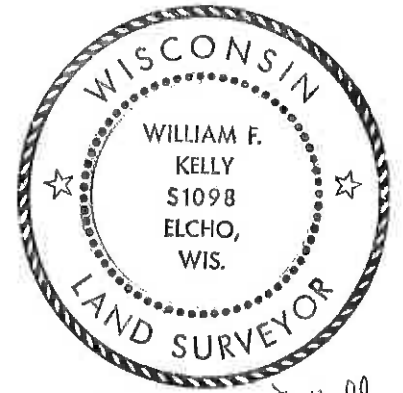


Index No. P-1
Index

William F. Kelly


Description of corner evidence found:

LOCATED SQUARED GRANITE STONE LYING ON ITS SIDE IN MARSH, ADJACENT TO A
FENCE CORNER. IDENTIFIED BY RESIDENT WITNESS AS THE 1/4 CORNER. STONE HAD
BEEN FROST HEAVED.

Description of monument and accessories I established to perpetuate the original location of this corner.

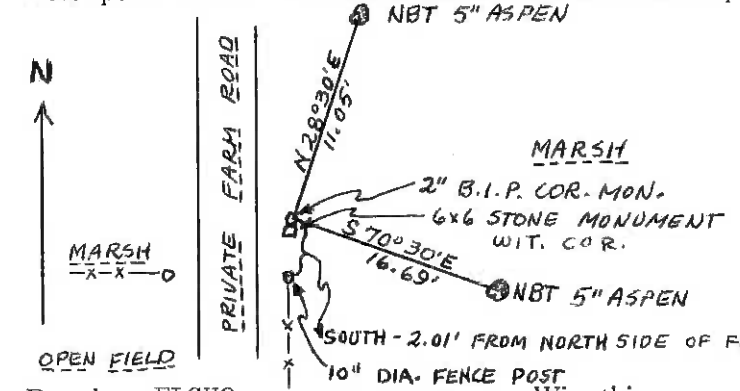

EXCAVATED STONE AND FOUND STONE
CHIPS WHERE BASE OF STONE WAS
ORIGINALLY INSTALLED. SET A
2" x 36" BLACK IRON PIPE WITH
BRASS CAP AS CORNER AND RESET
STONE AS WITNESS TO CORNER.
BRASS CAP MARKED: -



NOTE: NEW BEARING TREES
SCRIBED NBT ON TRUNK WITH A
+ MARK AT BASE. NO OTHER
SUITABLE TREES IN AREA TO MARK

Dated at ELCHO, Wis., this 14th day of FEBRUARY, 1925

Signature William F. Kelly Title REGISTERED LAND SURVEYOR Registration No. S 1098
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy