

CERTIFIED LAND CORNER RESTORATION

Index No. E-25

State of Wisconsin }  
County of Lanquade } ss.

I Raymond J. Hallisy do hereby certify that on the 29th day of April, 1978, I found evidence of the Section corner of 1, 12, 6, 7 Township 31, North, Range 9 & 10 EAST, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

History of original corner establishment:

Established in 1939 RESURVEY

31.9

Description of corner evidence found:

MEASURED FROM N 1/16 CORNER BETWEEN SECTION 7 & 12 NORTH 20.26 CHAINS.

MEASURED 111 FEET S 62 1/2 W FOUND HOLE WHERE W.C. WAS SET IN 1939 RESURVEY.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 1/2" x 24" Rod for TRUE CORNER.

Set 2" IRON PIPE WITH BRASS CAP 20 FT. S 62 1/2 W AS W.C.

Set 2" IRON PIPE WITH BRASS CAP 80 FT. N 62 1/2 E AS W.C. SOUTH WEST CORNER OF OLD <sup>SCHOOL</sup> N 62 1/2 E 91 FT.

ALL OF THE ABOVE ARE ON A LINE N 62 1/2 E

(SEE REVERSE SIDE FOR DETAILS)

Dated at Antigo, Wis., this 29th day of April, 1978.

Signature Raymond J. Hallisy Title Registered Land Surveyor Registration No. S-685  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)


Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy

FORM 985 M. C. MILLER CO., MILWAUKEE

4316961ARD

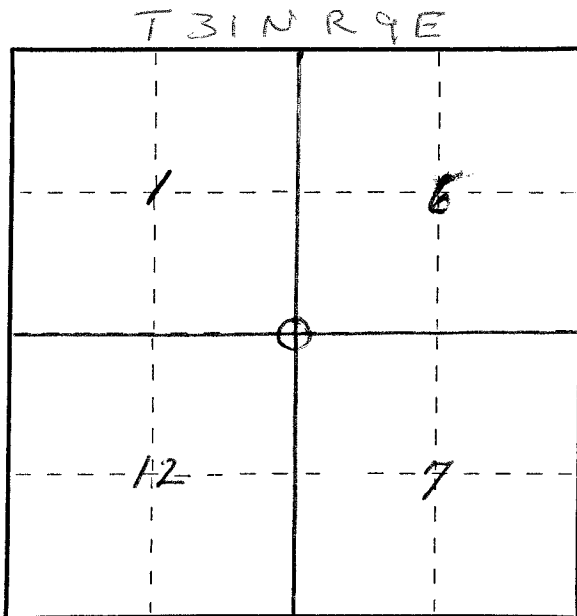

○ = Corner monument restored.

4310901000

