

# U.S. PUBLIC LAND SURVEY MONUMENT RECORD

(Prepared and as required by S. A-E 7.08 WI Administrative Code)

The NW corner of Section 23, T. 31 N., R. 9 E., Langlade County, WI

Corner was: (check all that apply)

- Restored through acceptance of an obliterated evidence location.
- Restored through acceptance of a found perpetuated location.
- Determined to be lost and re-established through proportionate methods.  
(Show bearings and distances to PLSS corners used for proportioning.)
- Restored/recovered/reestablished in a location that differs from a previously established position. (Show difference in plan view below.)

43169150000

- Check here if additional information is shown on the reverse side of this form.

**Describe record evidence, recovered physical evidence, occupational evidence, testimonial evidence and all other evidence considered in the recovery/restoration of the corner.**

1860--SUBDN. OF TWP. BY HIRAM FELLOWS, N. BETWEEN SEC'S. 22 & 23--80.0 CHS. SET POST, CORNER TO SEC'S. 14,15,22 & 23, B.Ts--SPRUCE 6" S.45°W. 24 LKS., TAM. 6" N.65°E. 20 LKS.  
1937--RESURVEY OF E.½ OF TWP. BY D.A. HINTZ, N. BETWEEN SEC'S. 22 & 23--40.24 CHS. FOUND OLD STAKE, RESTORED OLD B.Ts--TAM. 4" N.12°W. 23 LKS., TAM. STMP. S.10°W. 53 LKS. ( MEASURED FROM W.½ COR. OF SEC. 23 )  
1998--W. DOBBRATZ, FOUND 4" DIA. IRON PIPE WITH BRASS CAP STAMPED TO IDENTIFY CORNER (1937) NO APPARENT B.Ts WERE FOUND.

**Physical description of the monument set:**


FOUND 4" DIA. IRON PIPE WITH BRASS CAP (1937)

**Describe the accessories used to perpetuate the location of the corner. Include a plan view drawing and indicate accessories found/set. Describe measuring point on bearing trees. Show any topographic features that would aid in future recovery of the corner.**

## NEW ACCESSORIES

- ① B.T. 4" TAM. N.18°E. 9.51 FT.
- ② B.T. 4' TAM. S.21°E. 18.88 FT.
- ③ B.T. 5" SPRUCE S.50°W. 14.98 FT.
- ④ B.T. 4" SPRUCE S.86°W. 14.19 FT.
- ⑤ NW SEC. COR., FOUND 4" DIA. IRON PIPE WITH BRASS CAP STAMPED TO IDENTIFY CORNER (1937)

SET PLASTIC POST WITH SURVEY MARKER STICKER 1 FT. EAST OF CORNER. BEARINGS ARE MAGNETIC & ARE TAKEN TO THE CENTER OF B.Ts., DIMENSIONS ARE TO ALUM. NAIL ON SIDE OF B.T., ALL B.Ts ARE BLAZED, PAINTED BLUE & MARKED WITH A ALUM. B.T. TAG.

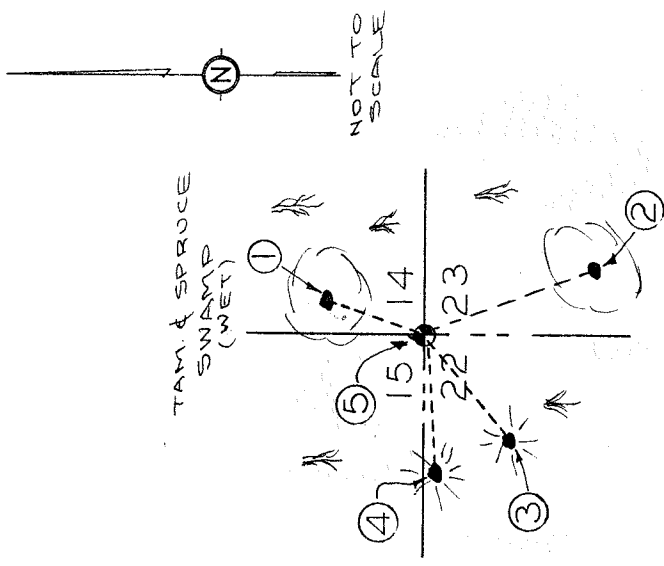


The NW

SURVEYORS SEAL

corner of Section 23

T. 31 N., R. 9 E.  
Langlade County, WI



INDEX No. N-17

I, W.G. DOBBRATZ, certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Wayne G. Dobbratz Signature  
5/6/98 Date

O = Location of corner