

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

(Prepared and as required by S. A-E 7.08 WI Administrative Code)

The SOUTHEAST corner of Section 5, T. 31 N., R. 13 E., Langlade County, WI
Corner was (check all that apply)

- ☒ Restored through acceptance of an obliterated evidence location.
- ☐ Restored through acceptance of a found perpetuated location.
- ☐ Determined to be lost and re-established through proportionate methods.
(show bearings and distances to PLSS corners used for proportioning.)
- ☐ Restored/recovered/re-established in a location that differs from a previously established position. (Show difference in plan view below.)
- ☐ Check here if additional information is shown on the reverse side of this form.

Describe record evidence, recovered physical evidence, occupational evidence, testimonial evidence, and all other evidence considered in the recovery/restoration of the corner.


1857 - Original corner established by James McBride - bearing trees: Lind, 20", N25°E, 34 links; Ironwood, 8", S32°E, 11 links; Sugar, 12", S41°W, 48 links; Sugar, 12", N71°W, 12 links.

2025 - Working in Sections 9 and 10, I found no evidence of the original corner or the BT's referenced in the original notes. I located Norway Lake, and the stream located West of the Southeast Corner of Section 4 referenced in the original notes. I computed the corner by using a line from the Southeast Corner of Section 6 projected East through Norway Lake matching the original calls for distances, being 198' across the lake and 1188' from the East side of Lake. Using this corner, the line heading East to the Southeast corner of Section 4 matches the call from the stream located 2145' West of the Southeast Corner of Section 4.

Physical description of the monument set:

I set an aluminum capped monument at corner location and tied out as shown below.

Describe the accessories used to perpetuate the location of the corner. Include a plan view drawing and indicate accessories found/set. Describe measuring point on bearing trees. Show any topographic features that would aid in future recovery of the corner.

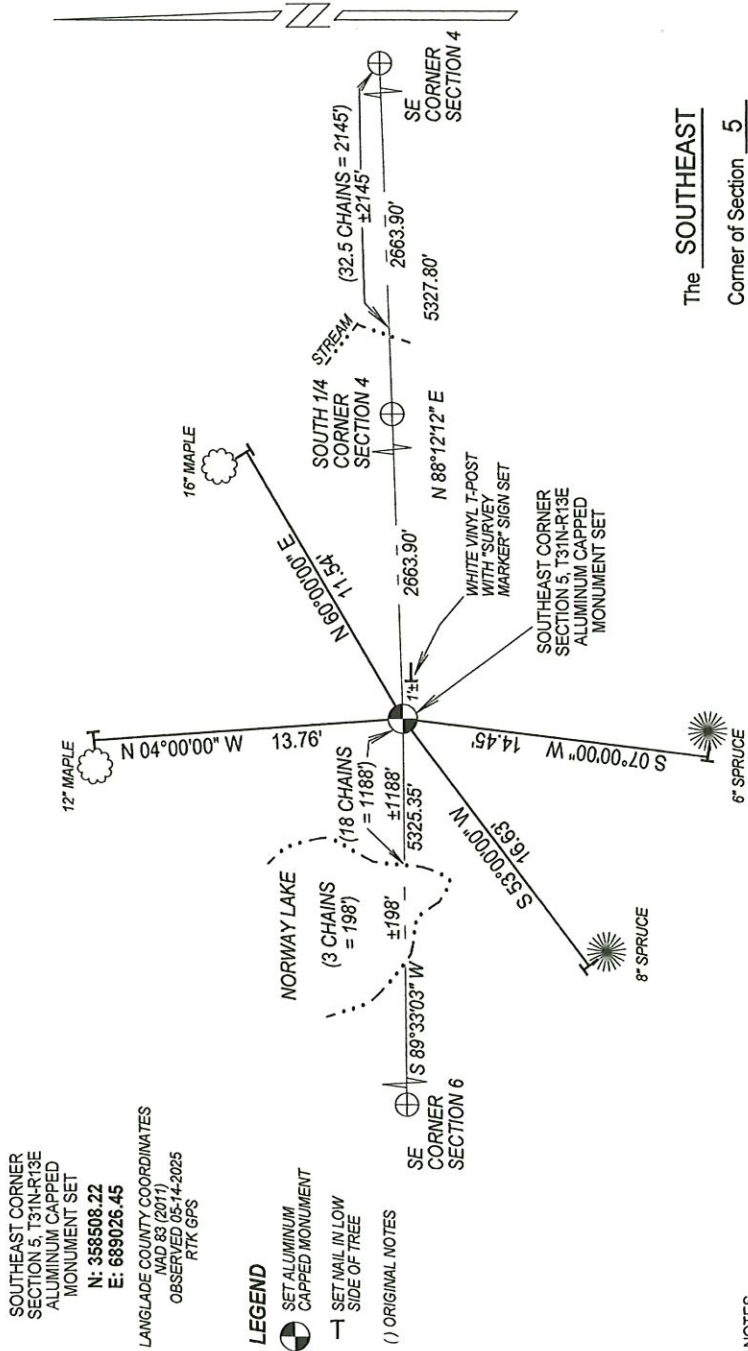

The SOUTHEAST

Corner of Section 5

T. 31 N., R. 13 E.
Langlade County, WI

SURVEYORS SEAL



I, Michael J. Hoffman, certify that the
corner location shown on this record was determined
by me or under my direction and control and that this
U.S. Public Land Survey Monument Record is correct
and complete to the best of my knowledge and belief.

Michael J. Hoffman Date 06/10/2025
Signature

INDEX No. E - 9

4311305 0000