

4311432 2000 2025

U.S. PUBLIC LAND SURVEY MONUMENT RECORD - LANGLADE COUNTY

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3)(e)(b)(c)(d)(e)(f)(g)(h)(i). An additional sheet may be added to if necessary to conform with said requirements.

(a) Corner Location:

Wisconsin Corner ID: 43114322000

Type of Monument: 0.75" Iron Rod

Location: East Quarter Corner

Section 32, Township 31 North, Range 14 East,

Town of Wolf River, Langlade County, Wisconsin

Langlade County Coordinates NAD83(2011):

Northing: 334740.53

Easting: 720360.48

RTK GPS direct observation

Calibrated to HMP DP8864 (Wolf River S GPS)

3 position average on 5/10/2025



T31N-R14E

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablishment through lost corner proportionate methods, indicate all monuments, distances and directions used to establish. Indicate type of monument found or set and sign post.

- Original - 9/1857 - J. McBride - Set post, made references: hemlock 10 N74°E - 26 links, hemlock 8 N67°W - 17 links.
- 4/3/1983 - Marvin Seymour - Map#40037 - Found iron rod. Made references: aspen 20" S32°W - 45.92 feet (nail), twin cherry 8" N1°W - 56.78 feet (nail), 16" white ash N16°E - 48.53 feet (nail), 14" norway pine N37°E - 45.28 feet (nail).
- 10/3/1997 - Thomas Arnott - Map#40213 - Found iron pin.
- 7/12/1998 - Thomas Arnott - Map#40321 - Found iron pin.
- 6/3/1995 - David Osterbrink - CSM V6 P123 - shows Found 0.75" iron bar.
- 06/06/2013 - Timothy Rusch - Map#20428 - Found 0.75" iron rod.
- 05/18/2024 - Michael Hoffman - Map#11165 - Found 0.75" iron rod.
- 2/28/1986 - Marvin Seymour - Tie Sheet - Found PK nail with the note that it was probably set by Tradewell in 1978. In 1985 Seymour found PK nail and accepted the location as distances east and west from it checked good. Found previous bearing trees.
- 5/10/2025 - Chad Besaw - Found and accepted a 0.75" iron rod approximately 0.2 feet below road surface and 2.4 feet south of CL of County Highway M. Found Seymour's BTs on north side of road. Made references shown below.




Chad A. Besaw

6/6/2025

Date

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

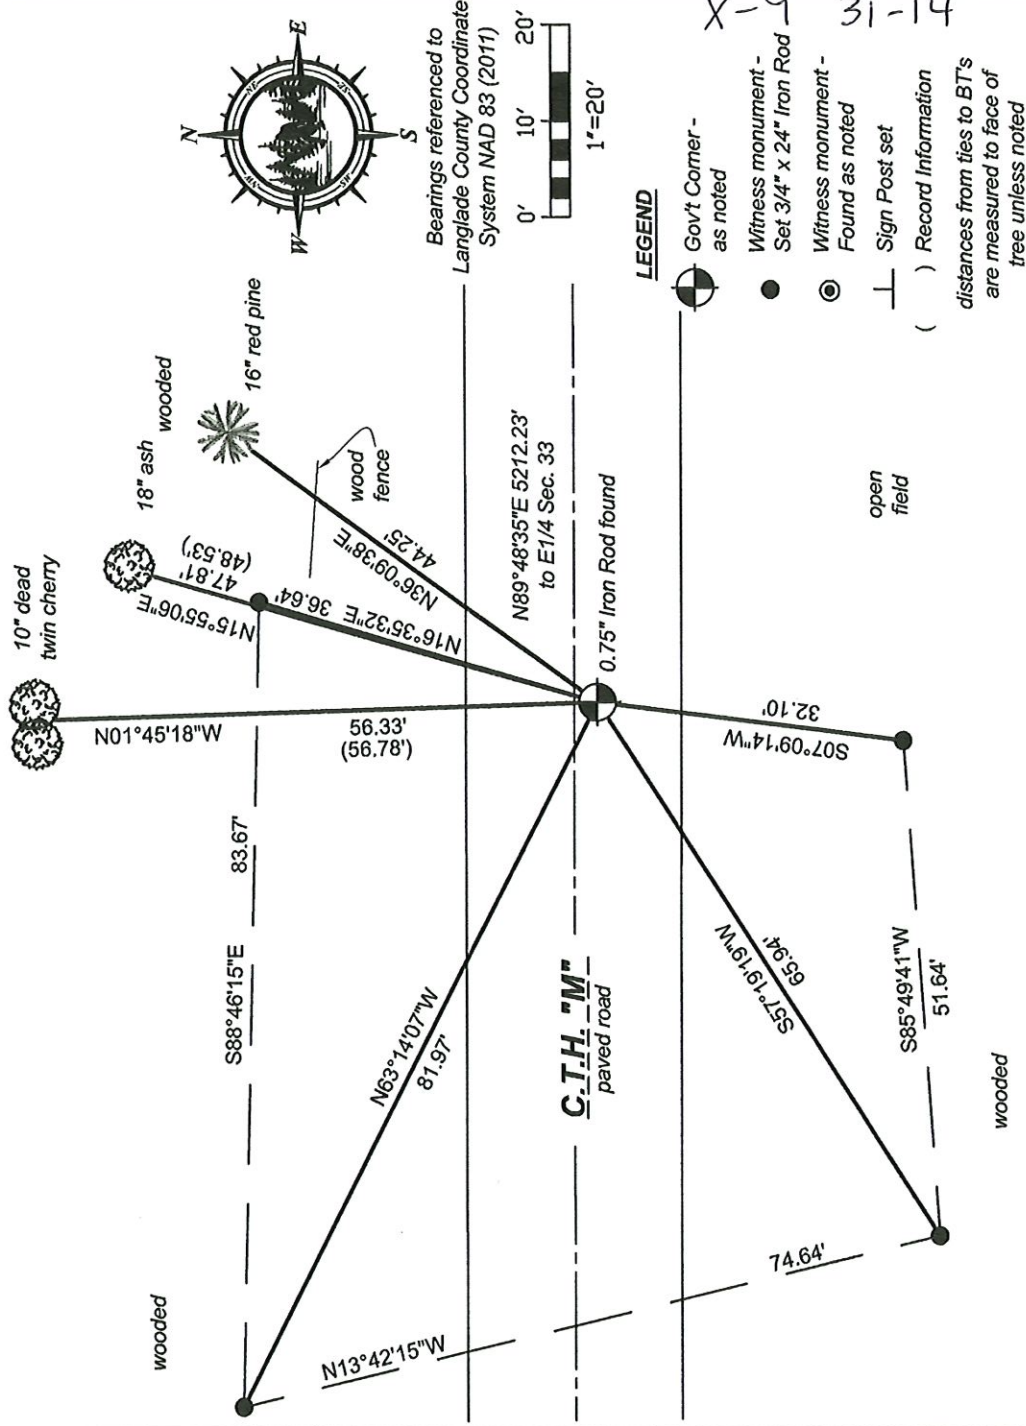

LEGEND

Gov't Corner - as noted

Witness monument - Set 3/4" x 24" Iron Rod

Witness monument - Found as noted

Sign Post set

() Record Information

distances from ties to BT's are measured to face of tree unless noted

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 31 North

Range 14 East ~~West~~

Town/~~City/Village~~ Wolf River

County Langlade

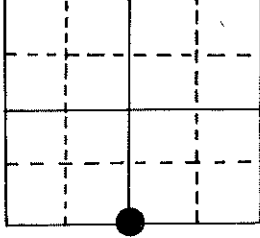

Section 33

PK nail

(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Original by J. McBride, 1857, OBT's ~~see record by xxxxxxxx~~


heml 10" N 74°E 26 lks., heml 8" N 67°W 17 lks.

PK nail probably set by W. Tradewell in 1978.

Seymour, 1985, found PK nail and accepted the location as distances east and west from it checked good. Found BT's aspen 20" S 32°W 45.92'

twin cherry 8" N 1°W 56.78'
Norway Pine 14" N 37°E 45.28'

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

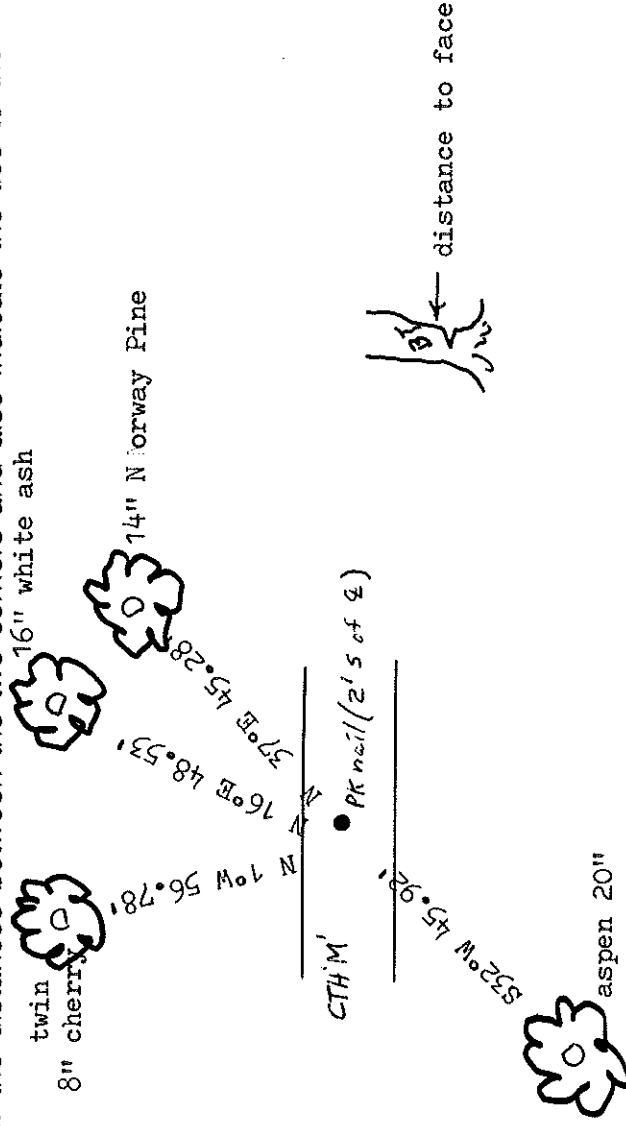


(i) I, Marvin E. Seymour

(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Marvin E. Seymour 2/28/86

Signature

Date

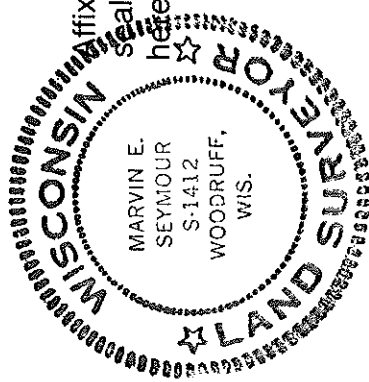

X-9

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.


(a) Corner location: Township 31 North

Range 14 East ~~West~~

Town/~~City~~ Village Wolf River

County Langlade

Section 33



~~PK nail~~ 3/4" iron rod


(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner, proportionate methods, indicate all monuments, distances and directions used to establish.

Original by J. McBride, 1857, OBT's ~~xxxxxxxxxxxxxxxx~~
heml 10" N 74°E 26 lks., heml 8" N 67°W 17 lks.

PK nail probably set by W. Tradgwell in 1978.

Seymour, 1985, found PK nail and accepted the location as distances east and west from it checked good. Found BT's aspen 20" S 32°W 45.92'
twin cherry 8" N 1°W 56.78'
Norway Pine 14" N 37°E 45.28'

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

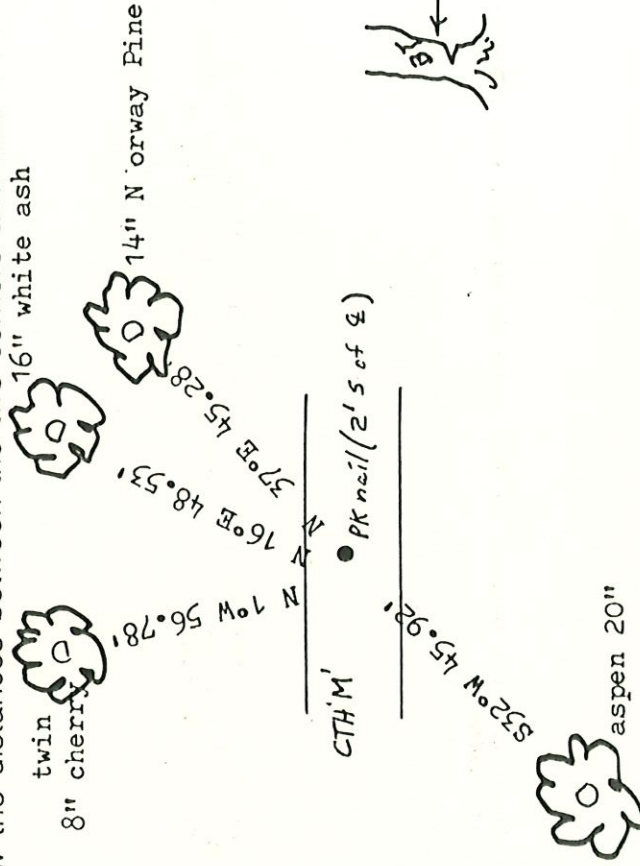

(i) I, Marvin E. Seymour


(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Marvin E. Seymour

2/28/86

Signature

Date

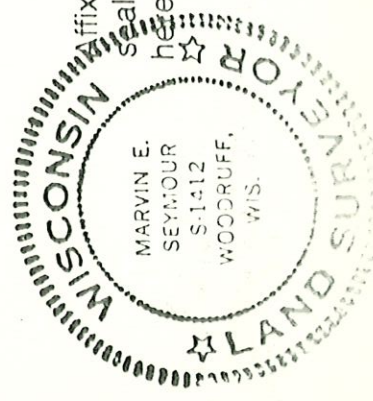

X-9

X-9