


U.S. PUBLIC LAND SURVEY MONUMENT RECORD - LANGLADE COUNTY

(a) Corner Location:

Type of Monument: 0.75" Iron F
Location: East Quarter Corner

*RTK GPS direct observation
Calibrated to HMP DP8864 (Wolf River S GPS)
3 position average on 5/10/2025*



Chad A. Besaw

6/6/2025


Date

6-6-2025

- Original - 9/1857 – J. McBride – Set post, made references: ironwood 6 S75°W – 19 links, birch 12 S40°E – 11 links.
- 4/3/1983 – Marvin Seymour - Map#40037 – Found iron rod. Made references: Aspen 10° S23°E – 73.34 feet, MR 12° S13°W – 62.02 feet, Basswood 8° S39°W – 73.59 feet, Aspen 12° S49°W – 80.55 feet.
- 6/3/1995 David Osterbrink - CSM V6 P123 – Found 0.75" iron Bar.
- 06/06/2013 – Timothy Rusch – Map#20428 – Found 0.75" iron rod.
- 2/25/1986 – Marvin Seymour – Tie Sheet – 1985 found PK nail and accepted the location as distances east and west from it checked good. Notes PK nail probable set by Tradewell in 1978. Made references: Aspen 12° S49°W – 80.55 feet, Basswood 8° S39°W – 73.59 feet, Red Maple 12° S13°W – 62.02 feet, Aspen 10° S23°E – 73.34 feet.

5/10/2025 - Chad Besaw - Found and accepted a 0.75" iron rod approximately 0.2 feet below road surface and 0.5 feet north of CL of County Highway M. Found one BT stump from Seymour. Made references shown below.

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

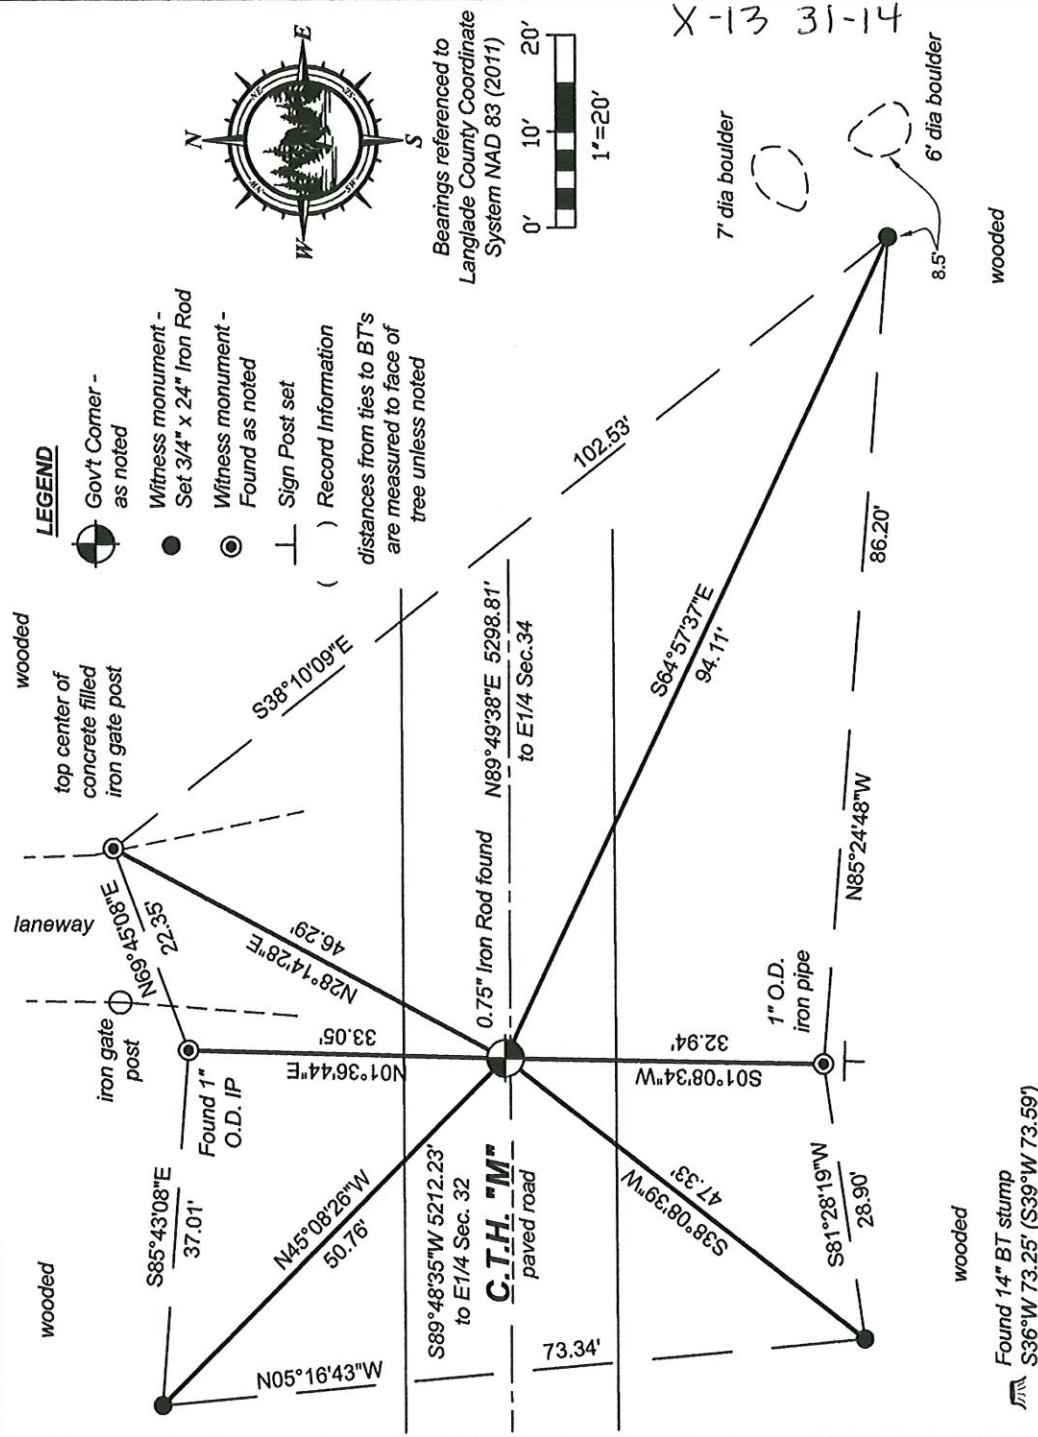

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 31 North

Range 14 East ~~West~~

Town/~~City~~ Wolf River

County Langlade



Section 34

PK nail



(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Original, 1857, J. McBride, OBT's Ironwood 6" S75°W 19 lks., BW 12" S40°E 16 lks.

PK nail probably set by W. Tradewell in 1978.

Seymour, 1985, found PK nail and accepted the location as distances east and west from it checked good.

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

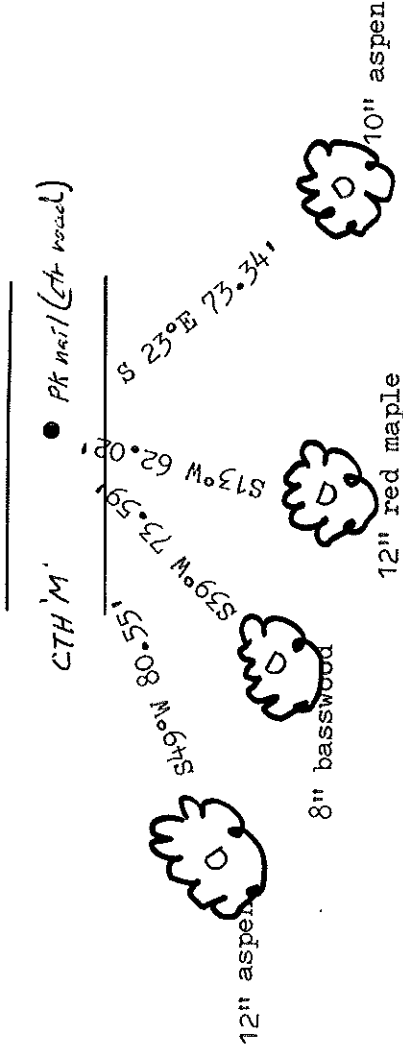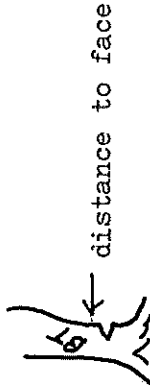

(i) I, Marvin E. Seymour


(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Marvin E. Seymour

2/28/86

Signature

Date

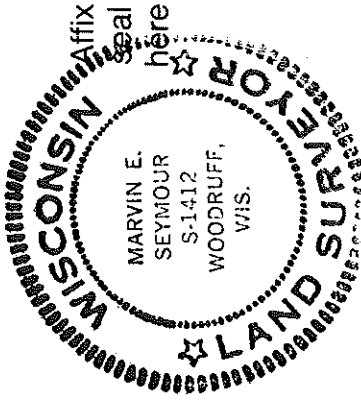

X-13

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 31 North

Range 14 East ~~14~~

Town/~~City~~ Langlade Wolf River

County Langlade



Section 34

~~PK nail~~ 3 1/4" iron rod



(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

Original, 1857, J. McBride, OBT's Ironwood 6" S75°W 19 lks., BW 12" S40°E 16 lks.

PK nail probably set by W. Tradewell in 1978.

Seymour, 1985, found PK nail and accepted the location as distances east and west from it checked good.


(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

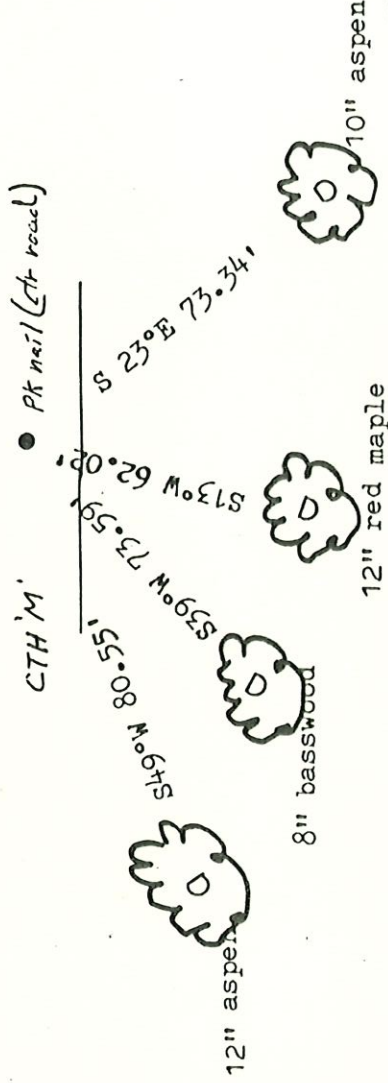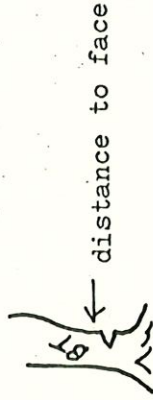

(i) I, Marvin E. Seymour

(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Marvin E. Seymour 2/28/86
Signature Date

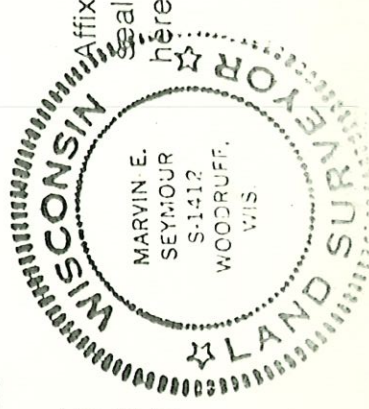

X-13

X-13