

CERTIFIED LAND CORNER RESTORATION

32-12


Index No. G-11

State of Wisconsin }
County of Langlade } ss.

I Raymond J. Hallisy, do hereby certify that on the 3rd day of May, 1970, I found evidence of the Center corner of Section 9 Township 32 North, Range 12E, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
J. Wini
J. Kryka

FORM 985 H. C. MILLER CO., MILWAUKEE

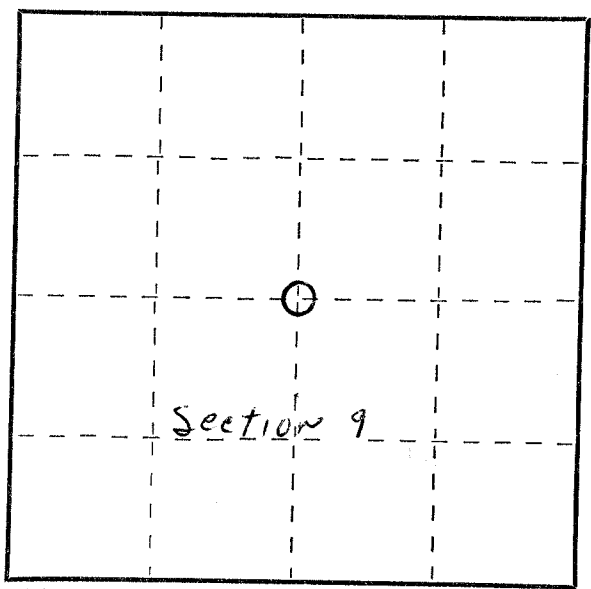

○ = Corner monument restored.

History of original corner establishment:


Corner set by M. Hutchinson

Description of corner evidence found:

Found his iron fence post and Pine stump BT
His BT is N82E 55 lks not S82E 55 lks.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2" pipe with brass cap, rock mound.
New B.T.'s
Elm 8" S49W 6 Ft. 9 inches
Elm 8" N3E 8 Ft. 2 inches
B.T.'s faced at base of tree and scribed BT.



Dated at Antigo, Wis., this 3rd day of May, 1970

Signature: Raymond J. Hallisy Title: Reg. Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19 _____ at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy