

LANGLADE COUNTY
U.S. PUBLIC LAND CORNER RESTORATION

The South corner of Section 29, T33N, R12E, Langlade County, WI

4331229 0020 2025

Corner was: (check all that apply)

- ☐ Restored through acceptance of an obliterated evidence location.
☒ Restored through acceptance of a found perpetuated location.
☐ Determined to be lost and re-established through proportionate methods.
☐ Show bearings and distances to PLSS corners used for proportioning, and show original distances).
☐ Restored/recovered/re-established in a location that differs from a previously established position.
☐ (Show difference in plan view below).
☐ Check here if additional information is shown on the reverse side of this form.


Corner history:

The original corner was established in 1865 by James Nowlin. Original bearing trees: sugar, 12", N45E, 10 links and a sugar, 8", S05W, 5 links. In 1908, Ed Brooks, in FB94-46 described this corner as: original BT standing, Sugar 12, N 85 E, 5 lks, instead of 45E, 10 lks. Sugar, 8, S 5 E, 5, instead of S 5 W, 10 links. New Sugar, 11", S 42 W, 24 and stone 4 x 6 x 18 + on top. In the 1934 resurvey work in this township, the corner was described as: "Through fields to orig. 1/4 cor. stone with cross on top." In 1982, Ray Hallisy found "4" pipe with brass cap, stone with X 2 links East. Fence north and south". January 25, 2025 I found the stone with chiseled "X" at fence corner and found three Hallisy bearing trees overgrown. May 5, 2025 I set ties and bearing trees as shown below.

Physical description of the monument set:

For the corner, I left the existing stone in place. The chiseled X on top is near northern edge.


Describe the accessories used to perpetuate the corner. Include a plan view drawing and accessories found/set. Describe measuring point on bearing trees. Show any topographic features that would aid in future recovery of the corner.



LEGEND

- 3/4" x 24" rebar set
white T vinyl witness post set 1' NE of stone
└ alum nail in low side blaze
* Hallisy bearing tree
"sign" = "Survey Marker" sign

Tie bearings are magnetic with hand compass
All ties, except SW were measured electronically with total station
Langlade County Coordinate system values
NAD 83 (2011) datum
N 400681.16
E 654643.57

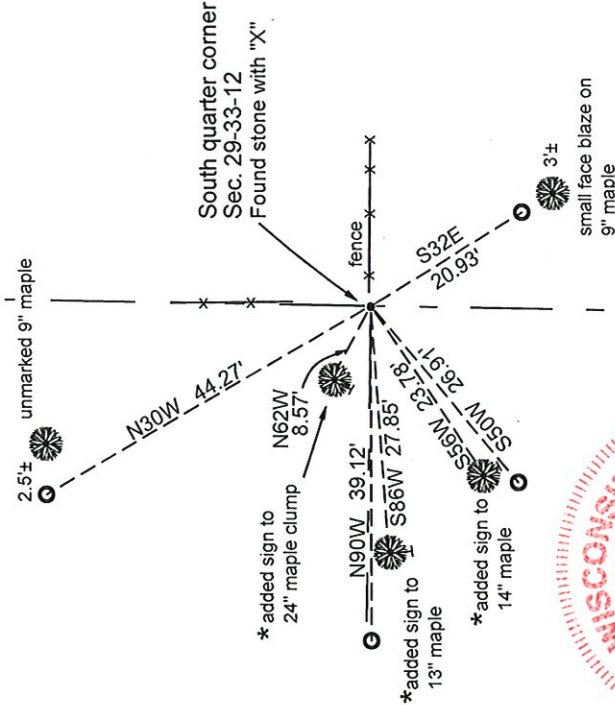

I, David E. Tlusty, Wisconsin Professional Land Surveyor S-1390, do hereby certify that the corner location and perpetuation shown on this record was made by me and that this U.S. Public Land Survey Monument Record as required by AE-7.08 of the Wisconsin Administrative Code is correct to the best of my knowledge and belief.

○ = corner perpetuated
The South Quarter
corner of Section 29,
T. 33 N., R. 12 E.,
Langlade County, WI

V-9 33-12

CERTIFIED LAND CORNER RESTORATION

Index No. V-7

State of Wisconsin }
County of Laplace } ss.


I, Raymond J. Hallisy, do hereby
certify that on the 13th day
of November, 1982, I found
evidence of the 1/4 witness
corner of Section 29 & 32
Township 33, North, Range
12E, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

History of original corner establishment:

Corner set in the 1930 resurvey.


Description of corner evidence found:
4" pipe with brass cap, stone with X 2 links East, Fence North and South

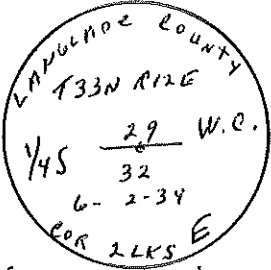

Description of monument and accessories I established to perpetuate the original location of this corner.

New BT's to Stone with X

5"	Clump Hard Maple	N54W	8'
9"	Hard Maple	S80W	27.2'
9"	Hard Maple	S48W	23.2'
3"	Elm	S34W	11.6'

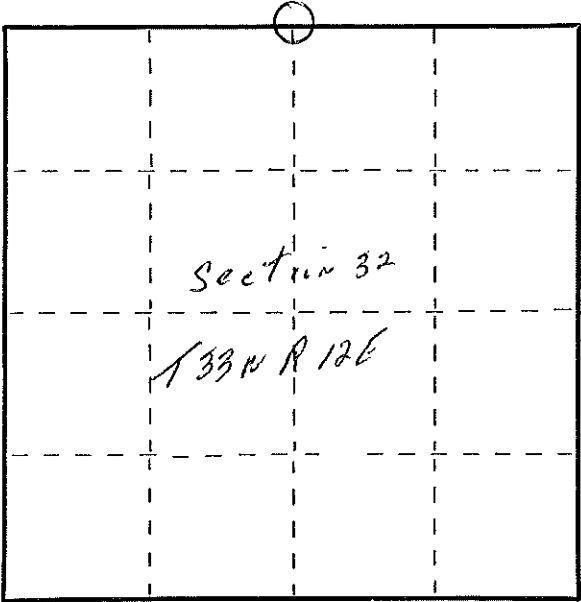

○ = Corner monument restored.

Dated at Antigo, Wis., this 13th day of November, 1982.

Signature Raymond J. Hallisy Title Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy