

LANGLADE COUNTY
U.S. PUBLIC LAND CORNER RESTORATION

The East Quarter corner of Section 32, T33N, R12E, Langlade County, WI

4331232 2000 2025

Corner was: (check all that apply)

- ☒ Restored through acceptance of an obliterated evidence location.
☐ Restored through acceptance of a found perpetuated location.
☐ Determined to be lost and re-established through proportionate methods.
☐ Show bearings and distances to PLSS corners used for proportioning, and show original distances).
☐ Restored/recovered/re-established in a location that differs from a previously established position.
(Show difference in plan view below).
☐ Check here if additional information is shown on the reverse side of this form.





Corner history:

The original corner was established in 1865 by James Nowlin. Original bearing trees: birch, 10", N40W, 15 links and a lind, 8", N35E, 35 links. In the 1930's resurvey of part of this township, this corner was described as: "Found iron pipe 50 links E & W of Cor. a wooden stake in the road for cor. Set W.C. 50 lks. West." An undated map filed as record number 30573, is a survey of lots in the NE quarter of Section 32 by Gary Radtke. Said map shows a pipe 33 feet west of the section corner.
On March 17, 2025, I found no evidence of pipe to the East. Found a leaning 1-1/4" iron pipe to the West. I found a badly frost heaved and leaning 4" brass capped iron pipe about 40 feet west of the center of Hwy "S". This monument was moved to 60 links (39.6') west of the corner in 1963 by forester Gerald Weix but he made no mention of the actual corner monument. Certified Survey Map Vol. 20, Pg. 10 by Tim Rusch shows the south line of the Northeast Quarter of Section 32 as defined by numerous pipes recovered; pipes as shown on county surveyor map 30573. He shows this corner as "computed". I received the computed coordinates from Tim Rusch and reset the corner at that location. I set a gear headed spike for the corner and measured ties as shown below.

Physical description of the monument set:

For the corner I set a gear headed spike

Describe the accessories used to perpetuate the corner. Include a plan view drawing and accessories found/set. Describe measuring point on bearing trees. Show any topographic features that would aid in future recovery of the corner.

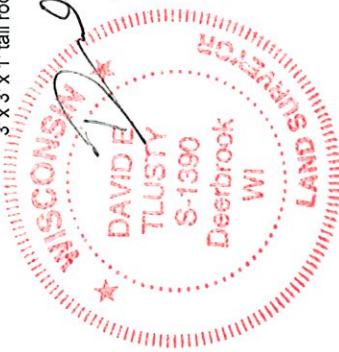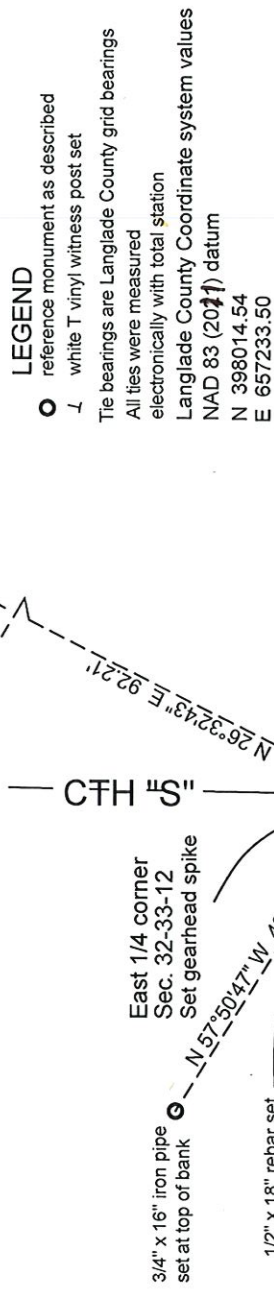

O = corner perpetuated
EAST
The East quarter
corner of Section 32,
T. 33 N., R. 12 E.,
Langlade County, WI

I, David E. Tlusty, Wisconsin Professional Land Surveyor S-1390, do hereby certify that the corner location and perpetuation shown on this record was made by me and that this U.S. Public Land Survey Monument Record as required by AE-7.08 of the Wisconsin Administrative Code is in correct to the best of my knowledge and belief.

4331232 2000 1963


FORM 985 H. C. MILLER CO., MILWAUKEE

State of Wisconsin }
County of LA SALLE } ss.

I G. McHENNA + G. WEIX, do hereby
certify that on the 30 day
of APRIL, 1963, I found
evidence of the 44
corner of SEC 32 + 33
Township 33, North, Range
12, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

Eugene J. McLean
Harold L. Weiss

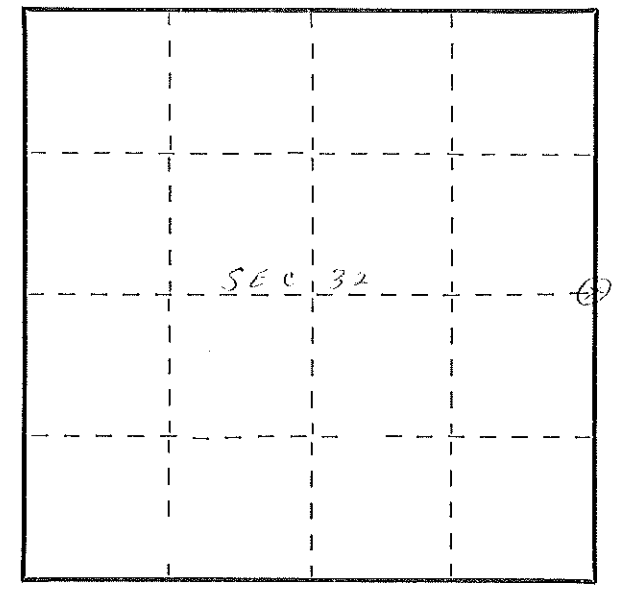

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

23-12 Index No. X-9

History of original corner establishment:

NOVEMBER 7, 1939
RESURVEY

Description of corner evidence found:

4" PIPE WITH BRASS CAPULSOLNS WEST OF CORNER

Description of monument and accessories I established to perpetuate the original location of this corner.

SET SAME PIPE 60CKS WEST OF CORNER
AND RESTAPPED

Dated at Antigo, Wis., this 10th day of May, 1963.

Signature [Signature] Title County Clerk Registration No. _____
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy