

CERTIFIED LAND CORNER RESTORATION

Index No. U-23

State of Wisconsin }
 County of Langlade } ss.

I, Daniel K. Pleoger, do hereby certify that on the 20th day of November, 1980, I ~~found~~ established ~~the~~ SC 1/16 corner of section 25 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

.....

.....

.....

FORM 983 H. C. MILLER CO., MILWAUKEE

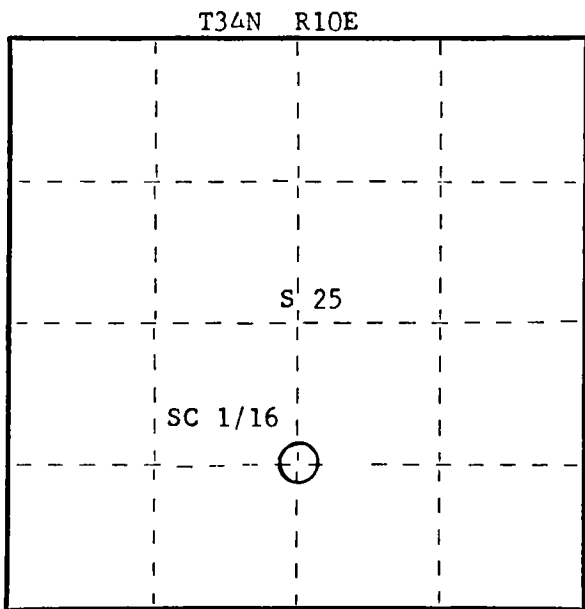

○ = Corner monument restored.

History of original corner establishment:
 No evidence of any previous corner.

Description of corner evidence found:
 Corner established by traverse and computation.
 Total distance from C 1/4 corner section 25 to 1/4 corner between sections 25 and 26 is 2702.012 feet at bearing S 2-02-09W.
 Set SC 1/16 corner 1351.005 intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Set a 1-1/2" I.D. iron pipe with screw-on brass cap, stamped:
 Projecting 18" above ground.
 Marked NBT's -
 Sugar 7" N78°W 8.04 feet
 Maple 6" N33°E 18.00 feet
 Sugar 5" S36°E 29.10 feet
 scribed 1/16 BT

T34N R10E
 SC 1/16 S²⁵
 S1537-1980



Dated at Rhineland, Wis., this 4th day of February, 1981

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

.....
 (Register of Deeds)

By..... Deputy