

CERTIFIED LAND CORNER RESTORATION

Index No. X-16


State of Wisconsin } ss.  
County of Langlade

I Daniel K. Pleoger, do hereby certify that on the 26th day of August, 19.80, I found established corner of the EC 1/16 corner of section 34 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


.....  
.....  
.....

FORM 985 H. C. MILLER CO., MILWAUKEE

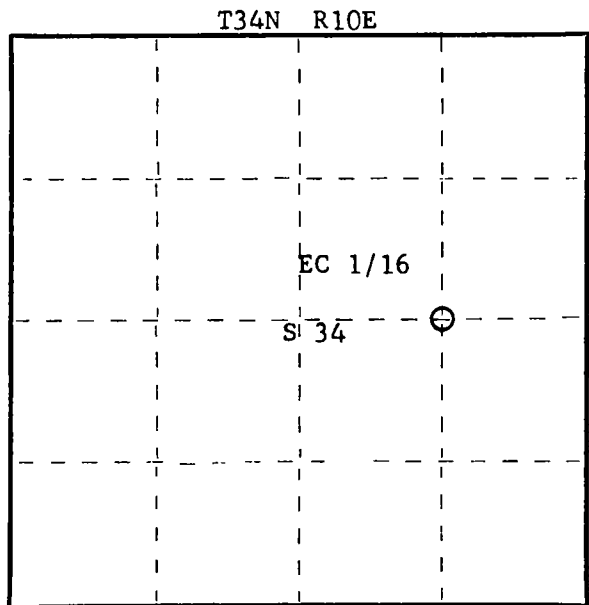

○ = Corner monument restored.

History of original corner establishment:  
No evidence of any previous corner.

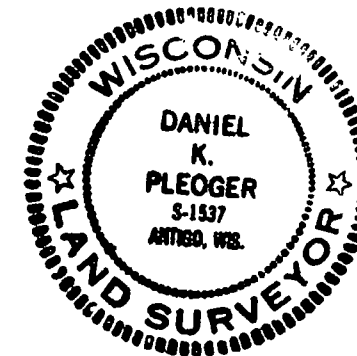

Description of corner evidence found:

Corner established by traverse and computation from C 1/4 corner section 34 to 1/4 corner between sections 34 and 35, total distance is 2325.959 feet at bearing S3-24-50E. Set EC 1/16 corner 1162.979 intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" x 18" iron pipe 30 feet north of centerline C.T.H. "T" for true corner.  
Set a 1-1/2" I.D. iron pipe with screw-on brass cap for witness corner - stamped:  
Monument projects 18" above ground.  
Marked N.B.T. -  
Maple 6" N52°E 76.20 feet - scribed 1/16 BT.  
B.O. power pole #3410-34R3  
S34W 95.68 - reference to true corner

T34N R10E  
EC 1/16 S + 34 W.C.  
S 40 ft. to Cor.  
S1537-1980

Dated at Rhinelander, Wis., this 26th day of November, 19.80.

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. S-1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of....., I hereby certify that the within instrument was filed in this office for record on the.....day of....., 19..... at..... o'clock..... M.

(Register of Deeds)

By.....Deputy