


CERTIFIED LAND CORNER RESTORATION

Index No. W-17


State of Wisconsin }  
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 7th day of November, 19 80, I ~~found~~ re-established ~~the~~ N. 1/16 corner of Sections 34 and 35 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

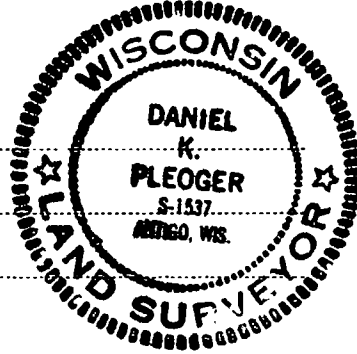

FORM 983 H. C. MILLER CO., MILWAUKEE

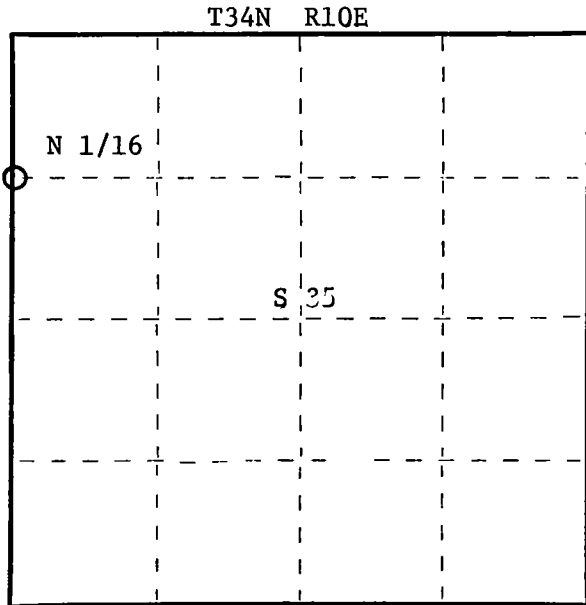

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor.  
No record of date.

Description of corner evidence found:

Ran traverse from section corner 26-27-34-35 to 1/4 corner between sections 34 and 35 for a distance of 2595.10 feet at bearing S 1-01-05 W. Set N 1/16 corner 1297.55 feet intermediate. H.C. Lawrence's post is .85 feet SE of our position.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap - stamped:  
Projecting 18" above ground.

Used H.C. Lawrence's BT's:

- Maple 7" S55°W 4.76 feet, scribed S34-B.T.
- Maple 10" S70°E 8.10 feet, scribed 1/16-B.T.
- Marked N.B.T. -
- Sugar 6" N19°W 25.88 feet, scribed 1/16 B.T.

T39N R10E  
N 1/16 34+35  
S1537-1980

Dated at Rhineland, Wis., this 25th day of February, 19 81

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy