


U S PUBLIC LAND SURVEY MONUMENT RECORD - ADDENDUM

NOTE: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a-f)

A-E 7.08(3)(a) Identity of corner
MEANDER CORNER - EAST LINE OF
GOVERNMENT LOT 7 SECTION 34
TOWNSHIP 34 NORTH
RANGE 11 EAST OF THE 4TH PM
TOWN OF ELCHO,
COUNTY OF LANGLADE

WISCONSIN - LANGLADE COUNTY
N: 430,935.474 USft (XXX.XXX.XX)
E: 635,950.596 USft (XXX.XXX.XX)
Datum: NAD83 (2011)
GNSS Method RTN - Direct
GNSS Control WISCORS VRS

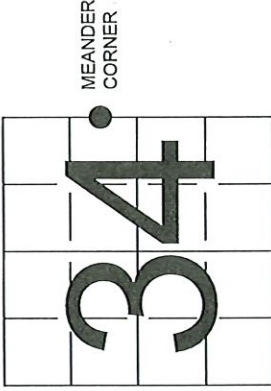

The coordinate value shown has been verified by the average of two or more GPS observations at a markedly different time. Values shown in parenthesis, are previously published measurements.

A-E 7.08(3)(b) Description of any record evidence, monument evidence, occupational evidence, testimonial evidence, or any other material evidence.

Original Surveyor: William E. Daugherty

Date of Original Survey Commenced: July 18, 1859
Completed: July 24, 1859

Original Accessories: 14 N 28° W 15
Birch 12 N 3° E 19
Aspen

See Previous Monument Record: Index No. W-17 - June 14, 1969 - Surveyor 685 - Raymond J. Hallisy - THENCE:

March, 1992 - Surveyor 1098 - William F. Kelly - indicates corner position as "meander corner monument, found in place" on: Record #30206, CSM - V.2 P.272, CSM - V.2 P.273 , and CSM - V.2 P.274.
December 12, 2000 - Surveyor 1795 - Devon J. Vanden Heuvel - indicates corner position as "Meander Cor." on CSM - V.9 P.151.
December 11, 2008 - Surveyor 1910 - Matthew E. Hoglund - indicates corner position as "Found 4" brass cap in concrete" on CSM - V.15 P.092


A-E 7.08(3)(f) Whether the corner was restored through acceptance of an obliterated location or a found perpetuated location.

August 24, 2021 - I found a 5" diameter concrete monument with a 4" diameter brass tablet affixed to the top & stamped to identify the corner.


I did not find any BT's recovered or established as noted on Certified Land Corner Restoration W-17.

I accept this monument as a FOUND PERPETUATED LOCATION OF THE CORNER and established 4 new witnesses as shown below.

A-E 7.08(3)(c)(d)(e)(h) Plan view of corner with references to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed. The directions and distances to other public land survey corners used as evidence or used for determining the corner location.

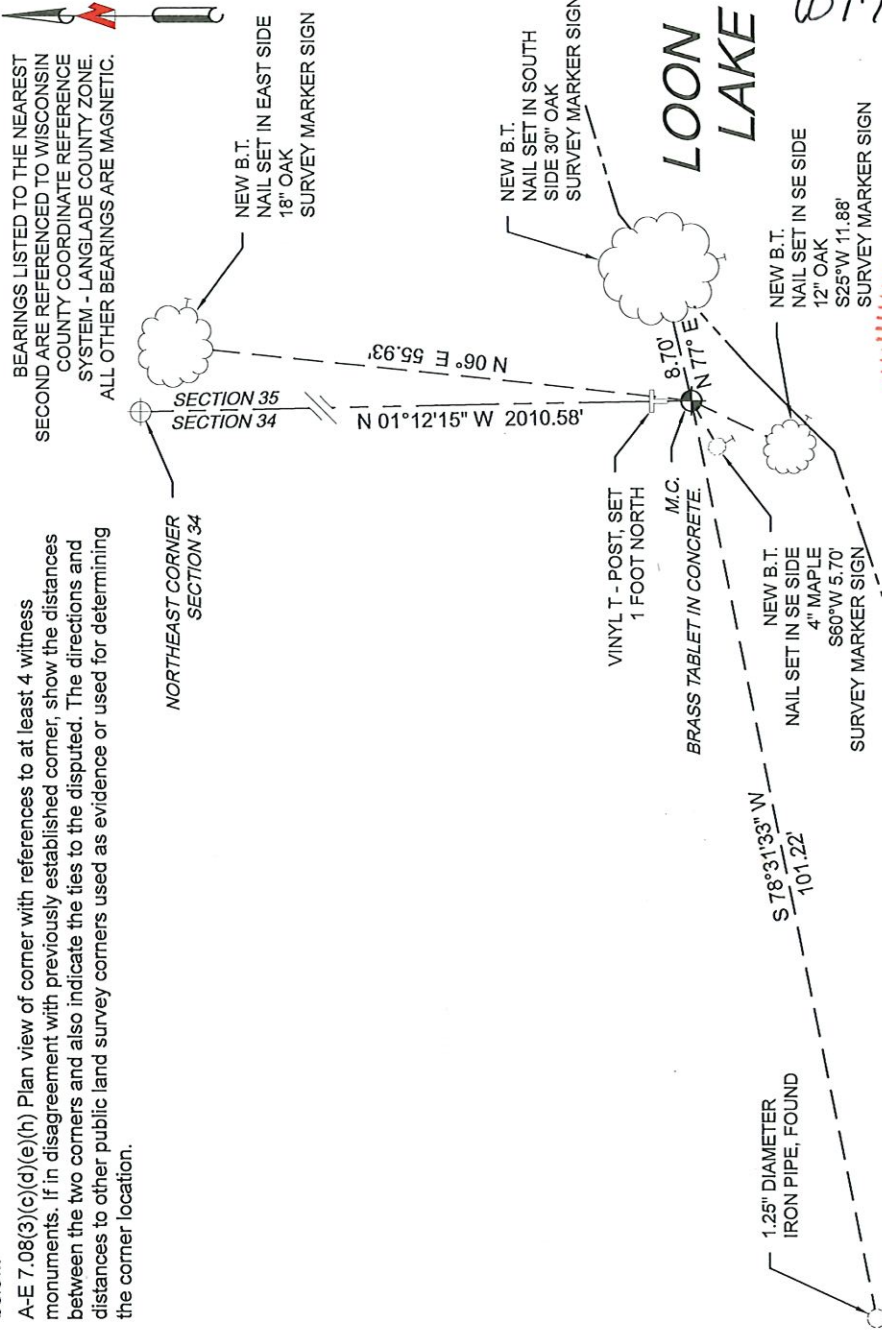

A-E 7.08(3)(i) I, Jeffrey L. DeMuth, Professional Land Surveyor No. S-2656, hereby certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge, and belief



Jeffrey L. DeMuth
Jeffrey L. DeMuth


SIGNATURE August 10, 2022 DATE

4341134 2900
43411342920

State of Wisconsin }
County of Langlade } ss.

I Raymond J. Hallisy do hereby
certify that on the 14th day
of June, 19 69, I found
evidence of the MC
corner of Bet. Sec. 34 & 35
Township 34, North, Range
11E, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

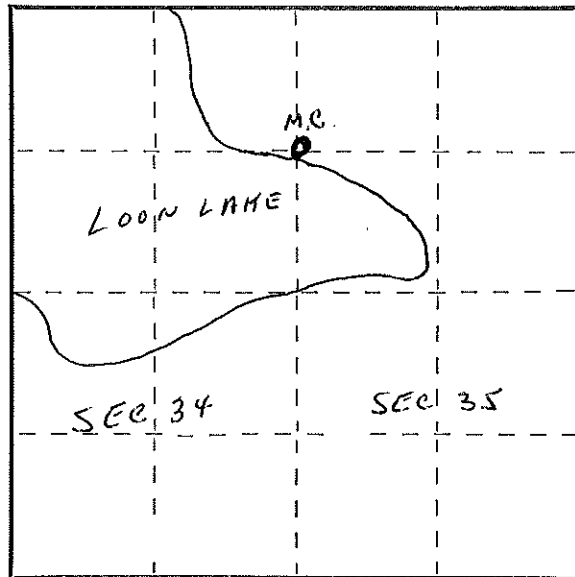

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

M. C. Set in 1952 by F. R. Vincentsen

Description of corner evidence found:

Found 5" squared wood post marked MC 34 35
1" pipe on north side
Oak ~~XXXX~~ 8" N57E 13.2 Lks
Oak Stump 6" N32W 21 Lks

Description of monument and accessories I established to perpetuate the original location of this corner.

Set ~~XX~~ 1½ inch pipe with 4" brass cap in cement
B.T.'s to M.C.
Red Maple 9" N33E 66 Ft. 5 inches
Basswood 12" N74E 38 Ft. 3 inches
B.T.'s faced at base and scribed BT



Dated at Antigo, Wis., this 14th day of June, 19 69.

Signature Raymond J. Hallisy Title Reg. Land Surveyor Registration No. S-685
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19 _____
at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy

34-11

Index No. W-17