

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:


This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
 O = Corner monument restored.

Quarter Corner to Sections 3 and 34,
 T.33-34 N., R.14E., Langlade County,
 and Forest County, WI.

State Plane Coordinates
 Wisconsin North Zone
 79738.99982-N
 2289683.33935-E

Geographic Coordinates
 45-22-42.27935-N
 088-45-00.48660-W

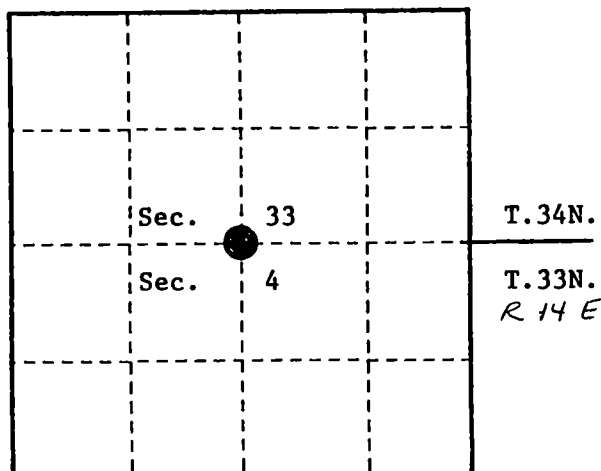

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.


Original survey in 1857 by Alfred Millard. Set wood post and the following bearing trees; Hemlock, 14", S.59°W., 10 links, Spruce, 18", N.40°E., 7 links, East, 2.80 chains stream 10 links wide runs SW.

On September 14 1983, Alan Harrison, R.L.S., found an old fence corner from which a Black Cherry stump bears East 2.0 feet as noted on Form #874. Also found the original creek call East to fit, and local testimony in agreement with this location. At the old fence corner, set a 2" x 36" aluminum monument with a tablet stamped to identify corner. Blazed and scribed new bearing trees; Aspen, 12", N.82°E., 27.24 feet, Sugar, 8", S.04°E., 47.39 feet, Black Cherry, 7", N.85°W., 13.18 feet, Steel Sign Post, South, 1.3 feet.

On October 21 1993, Alan Harrison, R.L.S., found monument and bearing trees as set in 1983. The N.E. and S.E. bearing trees are dead. Cut down Black Cherry for G.P.S. Observation. Blazed and scribed 3 new bearing trees; Black Cherry, 11", West, 40.27 feet, Aspen, 14", N.28°W., 24.30 feet, Black Cherry, 5", N.50°W., 28.62 feet.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

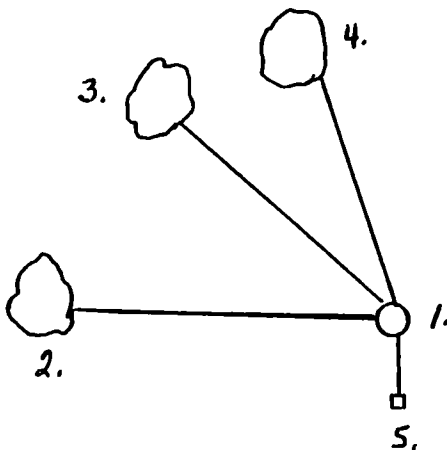

1. 2" x 36" aluminum monument with tablet stamped to identify corner.
2. Black Cherry, 11", West, 40.27 feet.
3. Black Cherry, 5", N.50°W., 28.62 feet.
4. Aspen, 14", N.28°W., 24.30 feet.
5. Steel Sign Post, South, 1.3 feet.

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location ?

(2)

(g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No

(1) I, Alan D. Harrison

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison

Signature


10/26/94

Date

CERTIFICATE READY FOR FILING:

See Vap

District Ranger

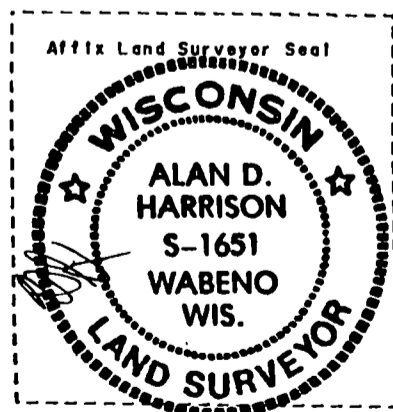


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).
 T.34N., R.14E.

- (a) Identify the corner by reference to the U.S. public land survey system.
 ○ = Corner monument restored.

Quarter corner to Sections 4 and 33,
 T.33-34N., R.14E.

*ORIGINAL SURVEY BY JAMES
 L NOWLIN IN APRIL, 1865*

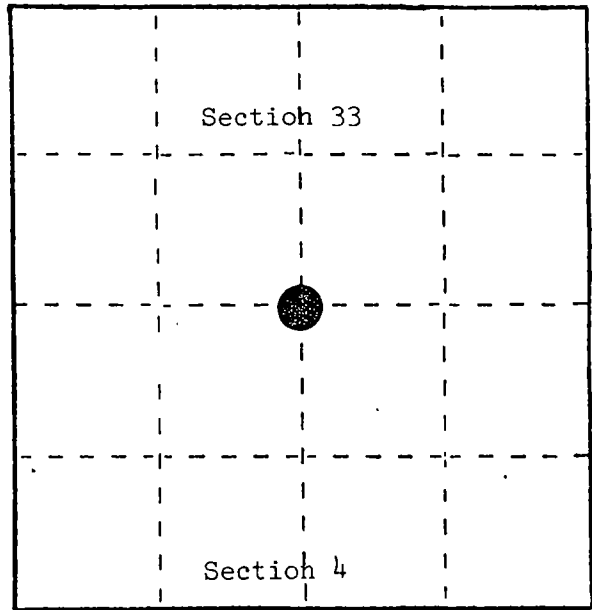

T.33N., R.14E

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.


Corner position recovered from witness tree of previous survey, old fence corner, and witness testimony. Placed a 2" x 36" aluminum monument.

*SEE OCT, 1982 PLAT OF SURVEY BY US
 FOREST SERVICE; SECT. 4, T33N, R14E*

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (Witness monuments shall be made of concrete, natural stone, iron or other equally durable material.) Describe witness monuments.

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. Aspen, 12", N82°E, 27.24'
2. Sugar, 8", S4°E, 47.39'
3. B. Cherry, 7", N85°W, 13.18'
4. Steel Sign Post, South, 1.3'

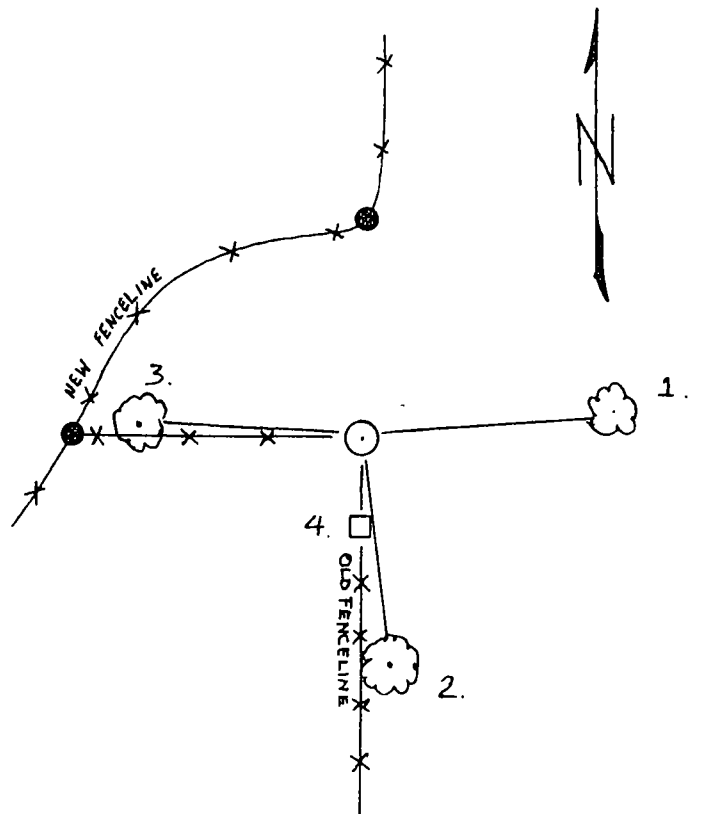

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d), above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

Perpetuated location.

(g&h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

CORNER POSITION VERIFIED
JAN. 1984

WILLIAM F KELLY, R.L.S. 1098
COUNTY SURVEYOR

William F. Kelly 1-27-84

(1) I, Alan D. Harrison
(Type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison
Signature

1/17/84
Date

