


4311024 0000 2024

U S PUBLIC LAND SURVEY MONUMENT RECORD - ADDENDUM

NOTE: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a-i)

A-E 7.08(3)(a) Identity of corner.
SOUTHWEST CORNER SECTION 24,
TOWNSHIP 31 NORTH,
RANGE 10 EAST OF THE 4TH PM,
CITY OF ANTIGO,
COUNTY OF LANGLADE

WISCONSIN - LANGLADE COUNTY
N: 342,814.499 USft (342,814.47)
E: 613,582.096 USft (613,582.09)
Datum: NAD83 (2011)
GNSS Method RTK
GNSS Control WISCONSIN VRS



The coordinate value shown has been verified by the average of two or more GPS observations at a markedly different time.
Coordinates shown in parenthesis are previously published values (Langlade County - Beacon).

A-E 7.08(3)(b)

Original Surveyor: Hiram C. Fellows
Date of Original Survey: June, 1859
Completed: June, 1859

Original Accessories:
White Pine 20 N 35° W 13 Links
White Pine 20 S 40° E 23 Links

See previous U.S. Public Land Survey Monument Record - R-1- December 17, 1996 - Surveyor 1390 - David E. Tlusty - THENCE:

November 20, 1996 - Surveyor 887 - Thomas R. Amott - indicates this position as "ip with 4" brass cap" on record #40206

October 20, 2003 - Surveyor 2488 - Dean Williams - indicates this position as "found 3.5" B.C. mon." on record #20258.

May 26, 2009 - Surveyor 2888 - Jason L. Cance - indicates this position as "brass cap mon" on record #20383 & #20384.

September 26, 2014 - Surveyor 2671 - Timothy J. Rusch - indicates this position as "brass capped monument" on record #10260.


June 25, 2019 - Surveyor 2671 - Timothy J. Rusch - indicates this position as "brass capped monument" on record #11056.

February 23, 2020 - Surveyor 3127 - James E. Anderson - indicates this position as "mag nail set from ties" on record #11009.

December 8, 2023 - I found a mag nail near the published coordinate position.
I also found all Tlusty's iron rod witnesses as shown on U.S. Public Land Survey Monument Record,
Index No. R-1, and shown below.

A-E 7.08(3)(c)(d) Plan view of corner with references to at least 4 witness monuments.

BEARINGS LISTED TO THE NEAREST
SECOND ARE REFERENCED TO WISCONSIN
COUNTY COORDINATE REFERENCE
SYSTEM - LANGLADE COUNTY ZONE.
ALL OTHER BEARINGS ARE MAGNETIC.

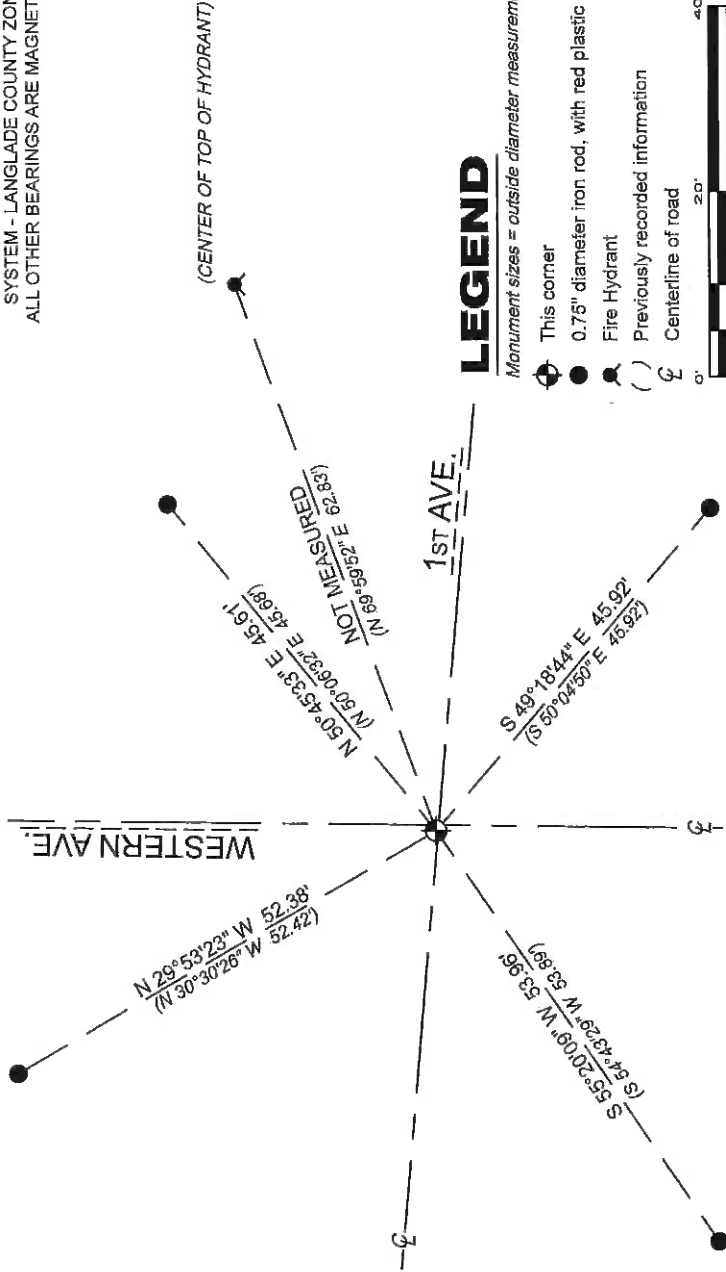

LEGEND

Monument sizes = outside diameter measurements.


- This corner
- 0.75" diameter iron rod, with red plastic cap, found
- Fire Hydrant
- () Previously recorded information
- Centerline of road



A-E 7.08(3)(e) 1996 Surveyor found a 1.25" X 30" iron pipe with a 4" brass cap (set previously), subsequent surveyors found the same. 2020 Surveyor set a mag nail from ties, I found the same in 2023.

A-E 7.08(3)(f) I accept this monument as a FOUND PERPETUATED LOCATION of the corner.
A-E 7.08(3)(g)(h) This corner was not determined through lost-corner-proportionate methods.

A-E 7.08(3)(i) I, Jeffrey L. DeMuth, Professional Land Surveyor No. S-2656, hereby certify that the corner location on this record was determined by me or under my direction and control, and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge, and belief.



Jeffrey L. DeMuth

January 3, 2024

DATE


SIGNATURE

FORM 985 H. C. MILLER CO., MILWAUKEE 431024.0000

State of Wisconsin }
County of LANGLADE } ss.

I WM F. KELLY, do hereby
certify that on the 8TH day
of JULY, 1974, I found
evidence of the SECTION
corner of SECS. 24-25 & 19-30
Township 31, North, Range
10 & 11 EAST, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.


Resident witnesses:

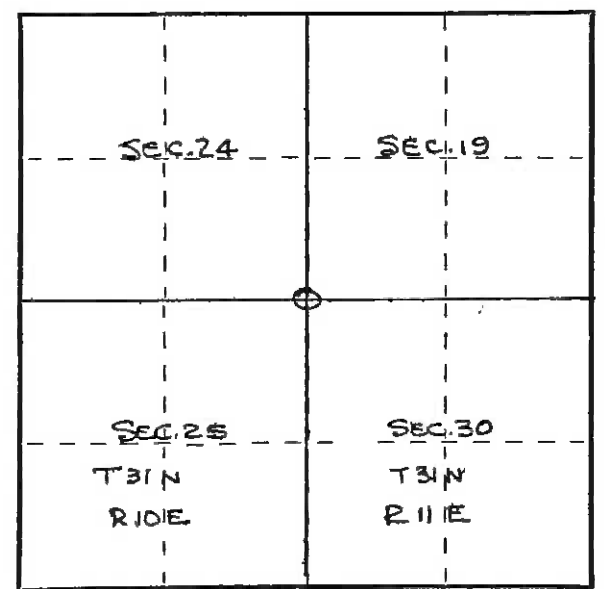

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

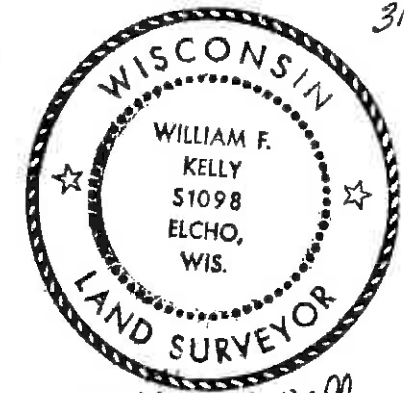


31-10
Index No. R-25


William F. Kelly 8 July 1974

Description of corner evidence found:
FOUND 2" IRON PIPE ATOP OF STONE MON. MKD W/X PIPE HAD BEEN CUT OFF BY ROAD MACHINERY.

Description of monument and accessories I established to perpetuate the original location of this corner.
SET 2" PIPE W/BRASS CAP MKD.

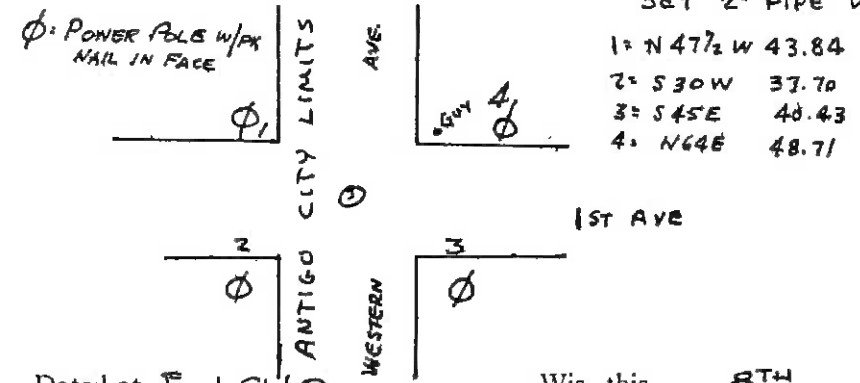

1: N 47 1/2 W 43.84
2: S 30 W 37.70
3: S 45 E 48.43
4: N 64 E 48.71



Dated at ELCHO, Wis., this 8TH day of JULY, 1974.

Signature William F. Kelly Title REG. LAND SURVEYOR Registration No. S-1098
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy