


U. S. PUBLIC LAND SURVEY MONUMENT RECORD

INSTRUCTIONS:

This record shall show the location of the corner and shall include all of the following nine elements (a through i).

- (a) Identify the corner by reference to the U.S. public land survey system.
 ○ = Corner monument restored.

Section Corner to Sections 20, 21, 28 and 29,
 T.35N, R.16E, Forest County, Wisconsin.

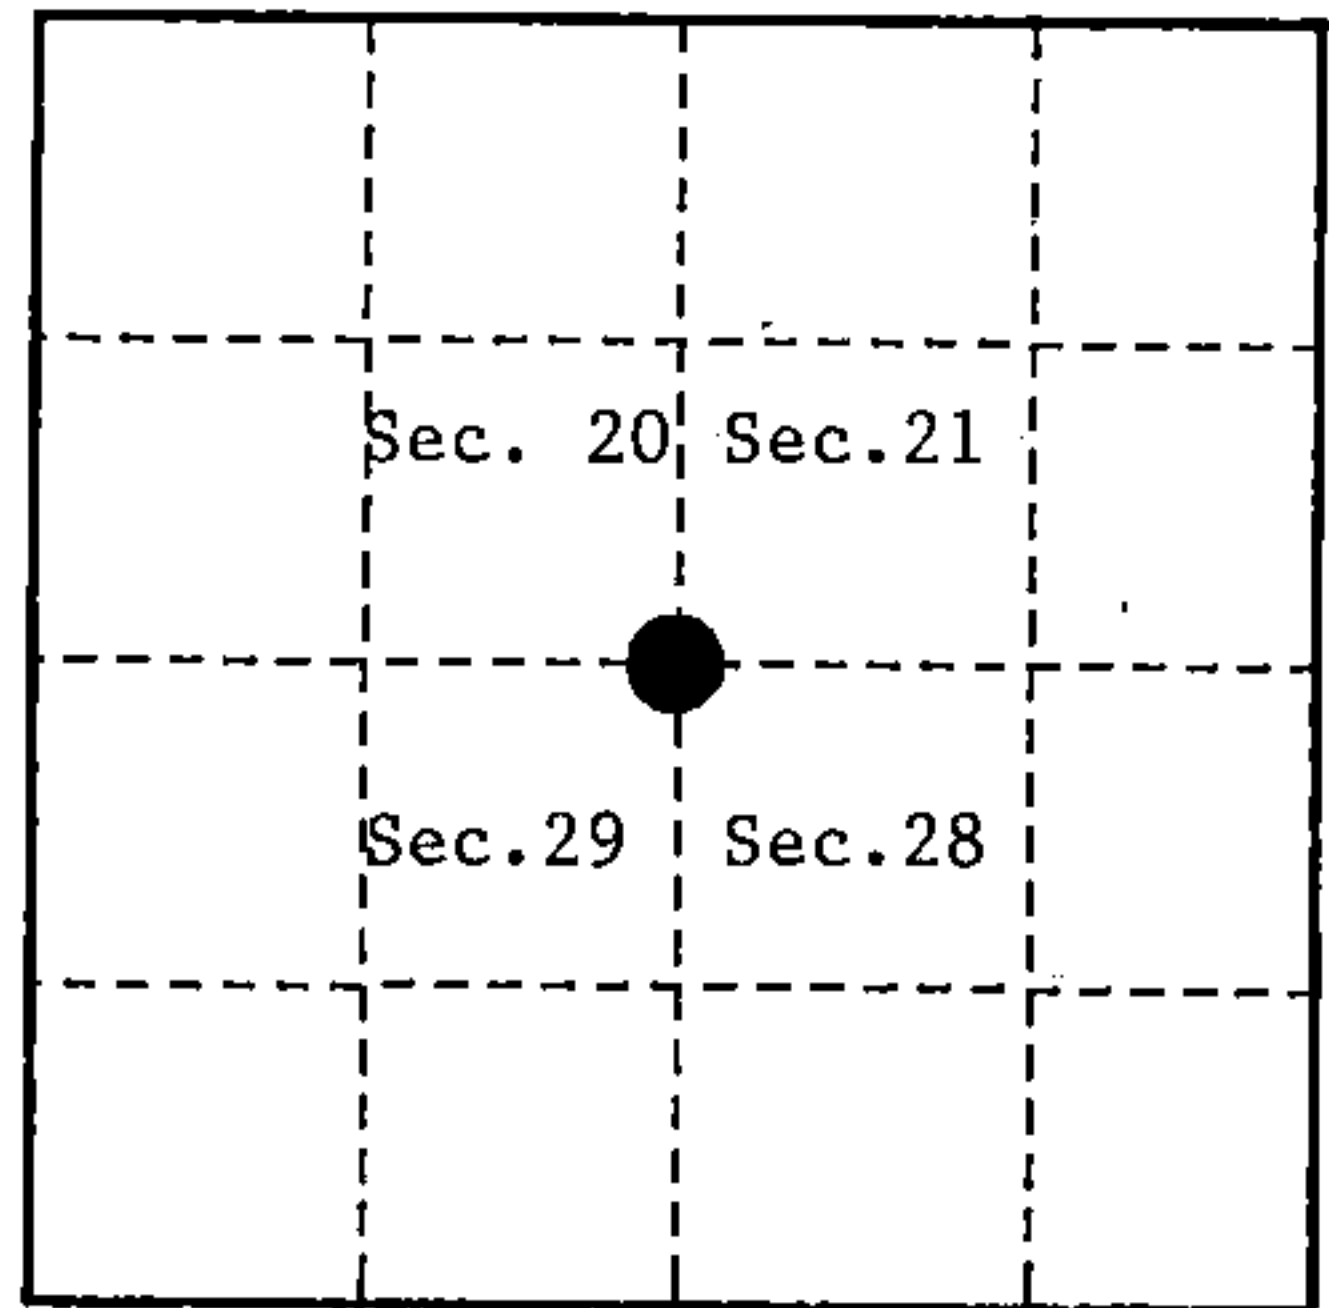

- (b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

Original survey in 1858 by James McBride, set wood post and made the following bearing trees; Basswood, 36", N.33°E., 30 links, Birch, 24", S.41°E., 45 Links, Ironwood, 10", S.85°W., 50 links, Hemlock, 36", N.19°W., 23 links.


In 1936 J.Hammes, a Junior Foreman with the Forest Service, found a wood stake with a metal location poster attached. Stake is on an old railroad right of way. Also found a 12" Elm bearing tree S.45°W., 20 feet from wood stake.

In 1995, Alan Harrison, RLS, found remains of a large Birch stump with 2 feet of heartwood standing. Pulled N.41°W., 29.70 feet to a point just West of railroad center. Pulled N.33°E., 19.80 feet to center of a very large Basswood stump which has 3 prodigies 8" to 14" in diameter, growing on edges. I accepted this bearing tree evidence as original and set a 2½" X 36" aluminum monument with an aluminum cap stamped to identify corner. Made new bearing trees as noted below.

- (c) In the plan view drawing below, provide reference ties to at least 4 witness monuments, or, if the location is within a municipality, to at least 2 witness monuments. (witness monuments shall be made of concrete, natural stone, iron or other equally durable material.)

- (d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner monument is disturbed. Indicate north.

1. 2½" X 36" aluminum monument with tablet stamped to identify corner.
2. Sugar, 7", N.48°E., 26.84 feet.
3. Sugar, 11", S.60°E., 53.59 feet.
4. Sugar, 10", S.11°W., 16.24 feet.
5. Sugar, 4", N.23°W., 30.36 feet.
6. Steel Sign Post, North, 1.18 feet.

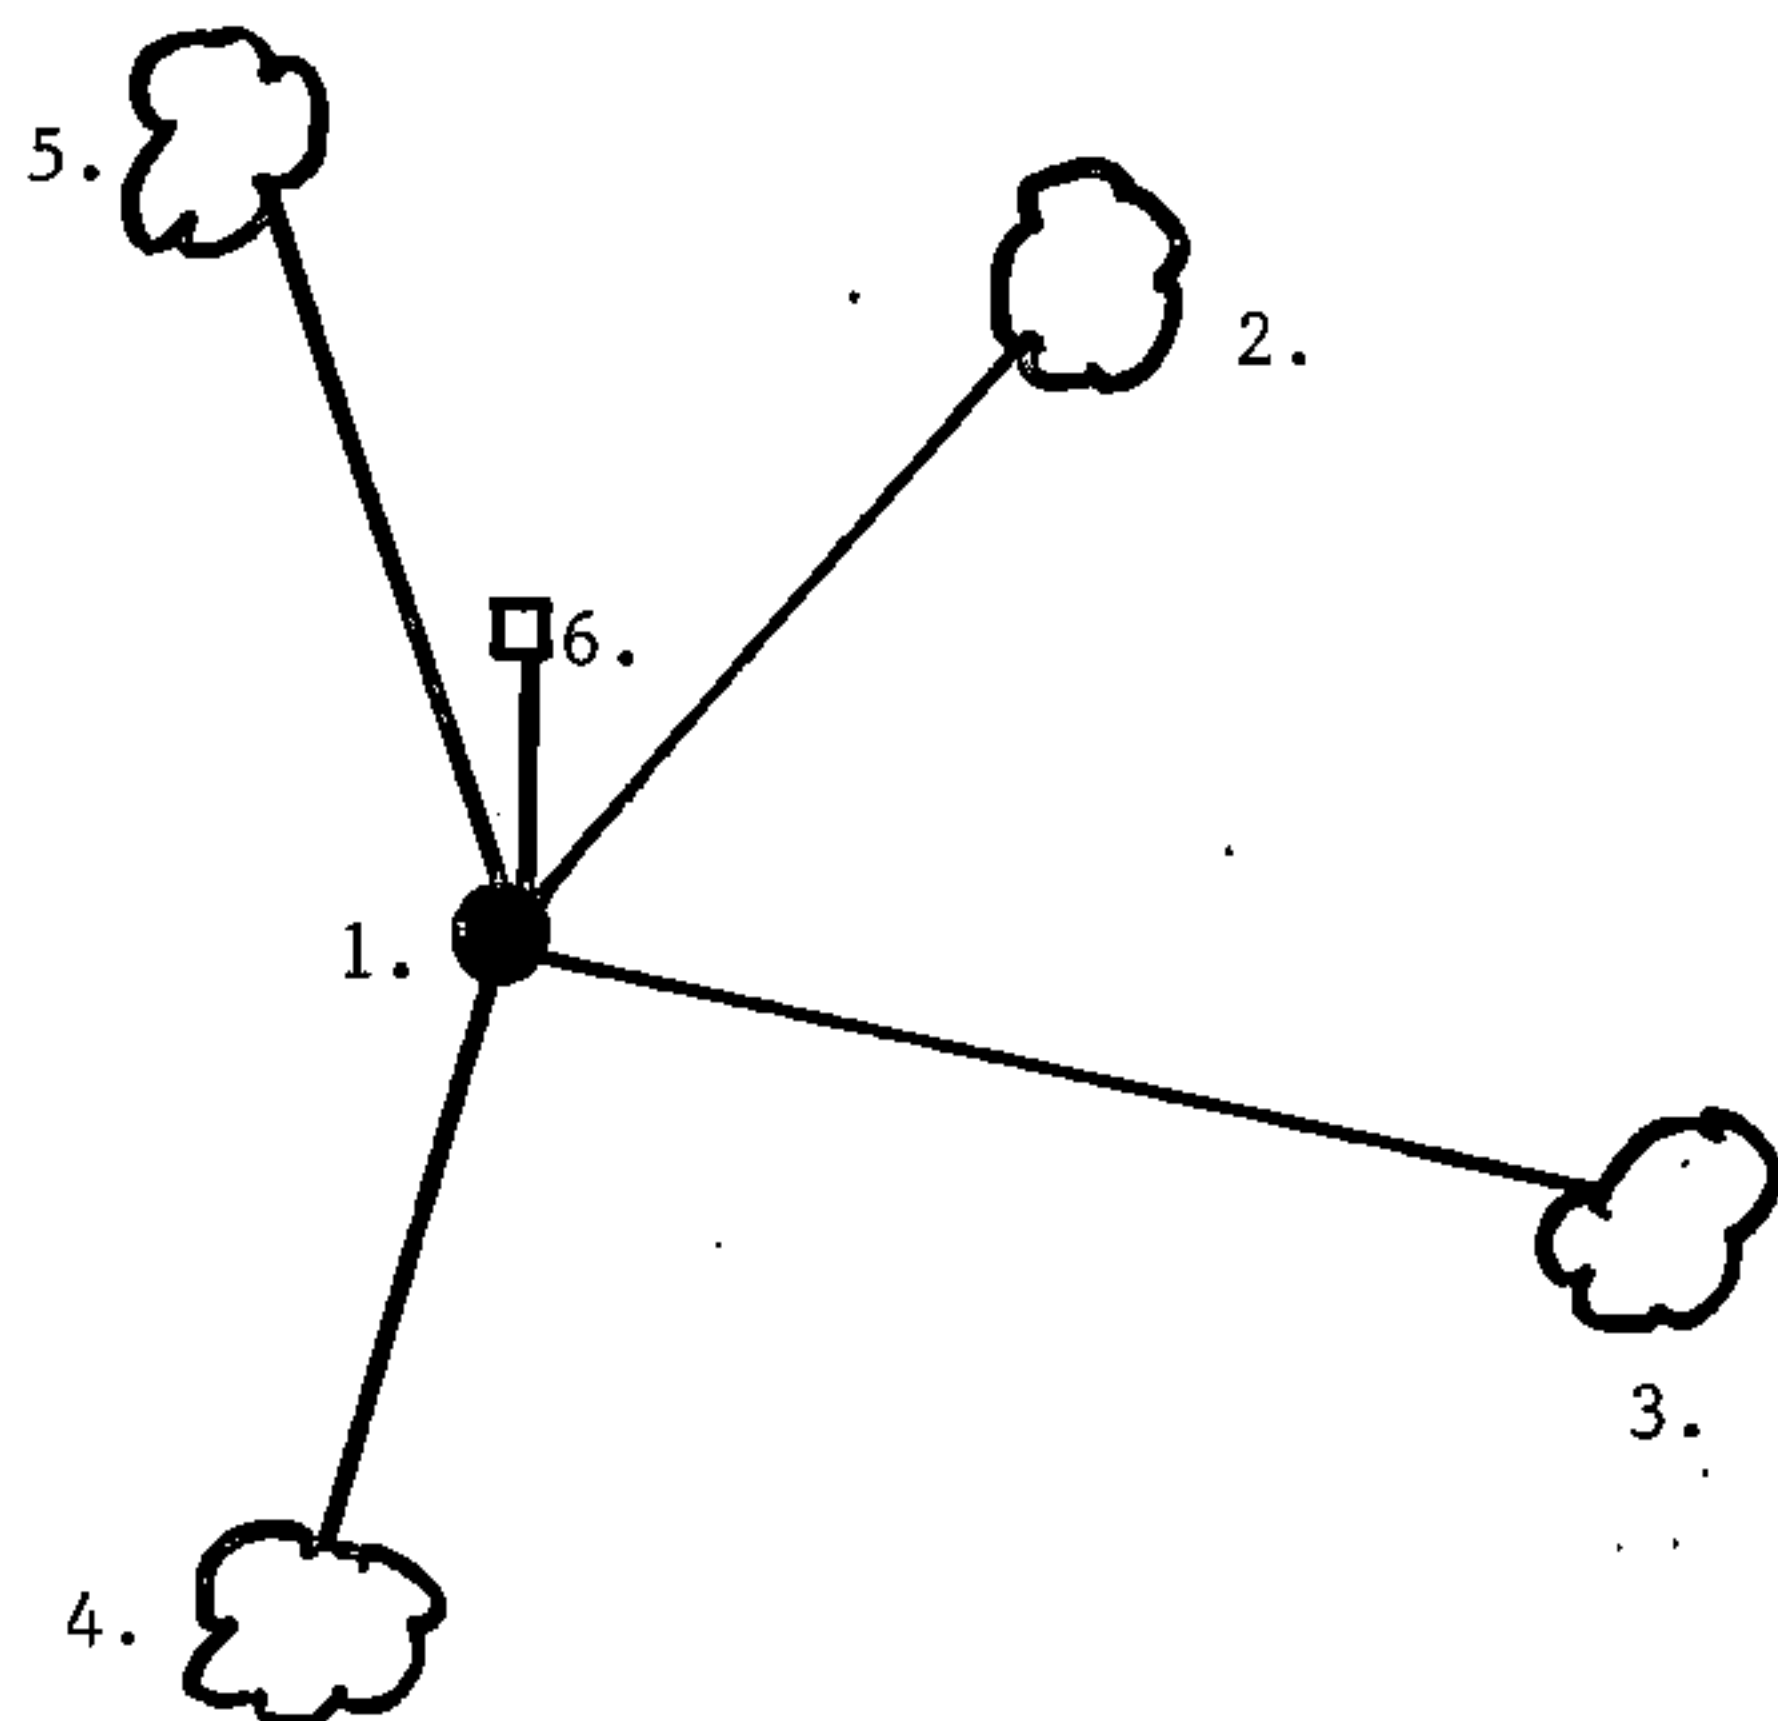

(e) Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan view drawing under (d). above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

None


(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

(1)

(g & h) Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or used for proportioning in determining the corner location?

No

REGISTER'S OFFICE
Forest County, Wis.
Received for record this 28th day
of July, A.D., 1995 at
4:00 o'clock P. M. and recorded
in Vol. Cover Restorations
page 35-16 R-9
Paul Chittie, Deputy
Register of Deeds

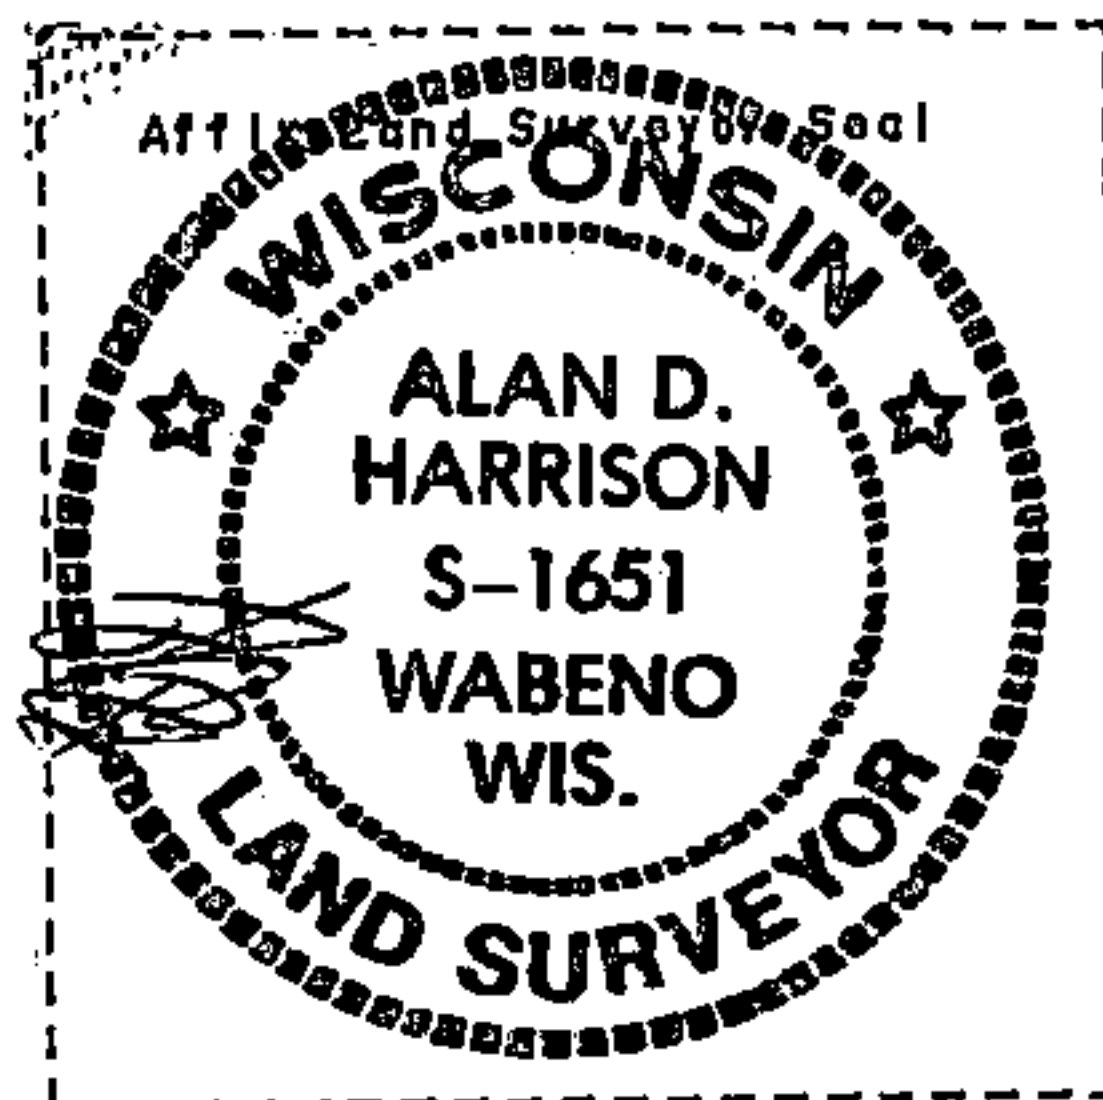

(1) I, Alan D. Harrison

(type or print name) certify that the corner location shown on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Alan D. Harrison 7/3/95
Signature Date

CERTIFICATE READY FOR FILING:

Tracy A. Hecker
District Ranger