

4310812 0000 2015
U.S. PUBLIC LAND SURVEY MONUMENT RECORD

NOTE: THIS FORM IS INTENDED AND DESIGNED TO FULFILL ALL REQUIREMENTS OF WISCONSIN ADMINISTRATIVE CODE, CHAPTER A-E 7.08, U.S. PUBLIC LAND SURVEY MONUMENT RECORD (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). ADDITIONAL SHEETS MAY BE NECESSARY TO CONFORM TO SAID REQUIREMENTS.


(a) CORNER LOCATION:

SOUTHEAST CORNER, SECTION 12
TOWNSHIP 31 NORTH
RANGE 8 EAST
TOWN OF PINE RIVER
LINCOLN COUNTY
WISCONSIN

(b) HISTORY OF ORIGINAL CORNER:

ORIGINAL SURVEYOR: James M. Marsh, Set post
COMMENCING DATE: July 8, 1851
COMPLETION DATE: July 28, 1851
ORIGINAL BEARING TREES:
8" Birch; S 50° E; 34 links
10" Sugar Maple; S 41° W; 67 links
11" Sugar Maple; N 17° E; 67 links
18" Birch; N 23° E; 37 links

T 31 N, R 8 E




(f)(g)(h) DESCRIPTION OF MONUMENT FOUND AT THIS CORNER AND IF IT WAS ACCEPTED. STATE ALL EVIDENCE (MATERIAL, TESTIMONIAL, OCCUPATIONAL, PLATS, RECORDS, OTHER MONUMENTS) USED AS A BASIS FOR ESTABLISHING LOCATION. IF RE-ESTABLISHING THROUGH LOST CORNER PROPORTIONATE METHODS, INDICATE ALL MONUMENTS, DISTANCES, AND DIRECTIONS USED TO ESTABLISH. INDICATE TYPE OF MONUMENTS FOUND OR SET.

02/06/1975 - W. Kelly, RLS-1098, found a 6" x 6" Granite Stone Monument lying on its side. The Stone had been knocked over by logging operation. Resident witness, E. Dittmar, identified the original location of corner and Kelly found a depression in the ground indicating original corner location. He set a Bernitsen Aluminum Monument flush with the ground as the corner monument and reset the Stone next to the Aluminum Monument as a witness corner. He made reference ties to perpetuate the corner location.

11/28/2012 - I, Anthony R. Dallman, PLS-2405, found the Bernitsen Aluminum Monument (broken) and the 6" x 6" Granite Stone Monument, both tipped. I reset the Granite Stone Monument plumb at the location of the Aluminum Monument base as set by Kelly, down 8" below ground surface with a Rebar along the north edge of the Stone. I set new reference ties to further perpetuate the corner location, as shown in the sketch below.

(c)(d)(e) PLAN VIEW OF THE CORNER WITH TIES TO AT LEAST FOUR WITNESSES. IF IN DISAGREEMENT WITH PREVIOUSLY ESTABLISHED CORNER, SHOW THE DISTANCES BETWEEN THE TWO CORNERS AND ALSO THE TIES TO THE DISPUTED CORNER.

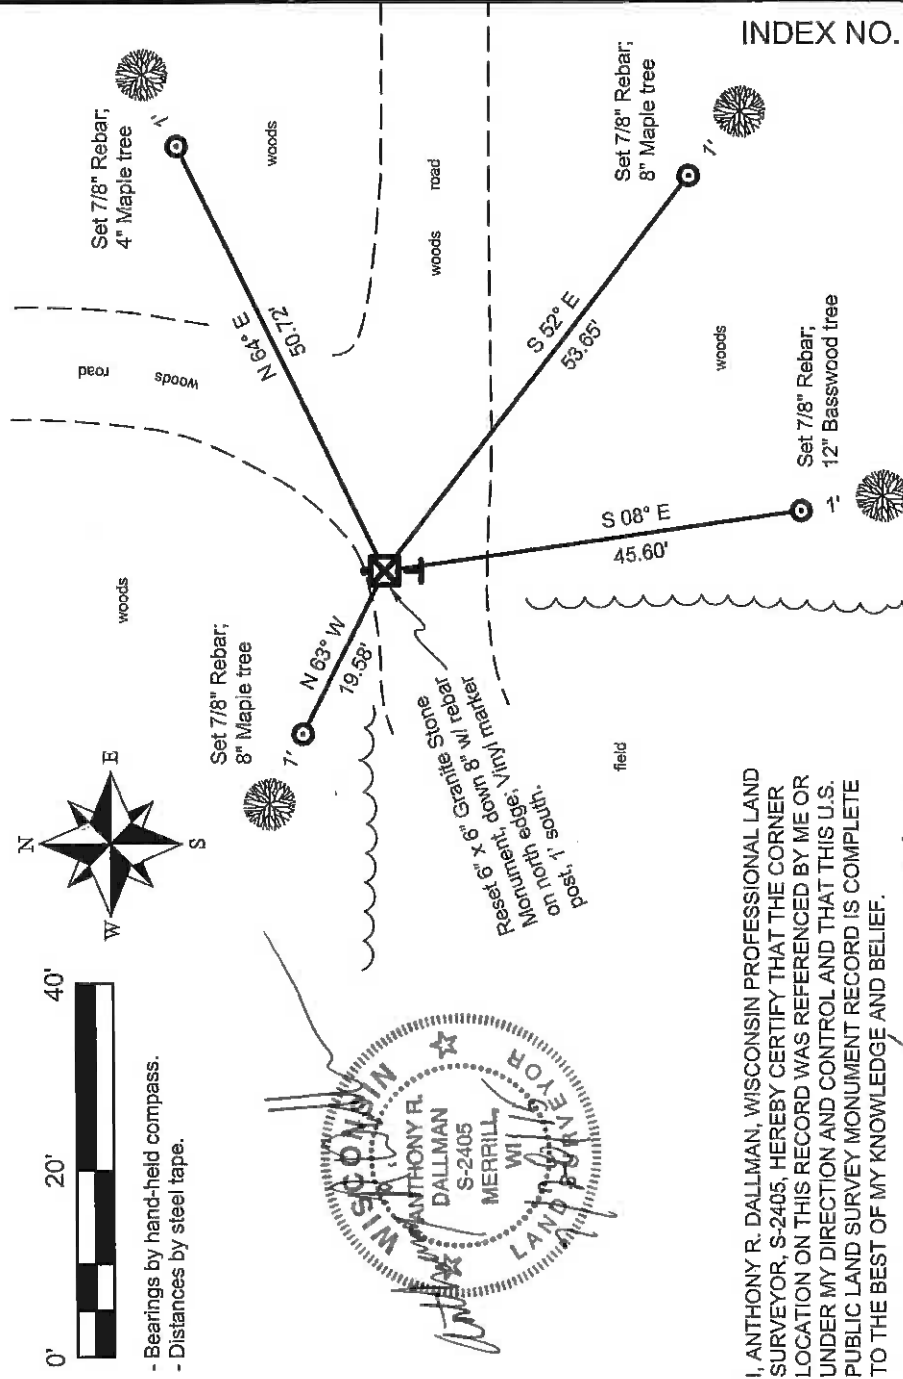

I, ANTHONY R. DALLMAN, WISCONSIN PROFESSIONAL LAND SURVEYOR, S-2405, HEREBY CERTIFY THAT THE CORNER LOCATION ON THIS RECORD WAS REFERENCED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U.S. PUBLIC LAND SURVEY MONUMENT RECORD IS COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Anthony R. Dallman
ANTHONY R. DALLMAN, PLS S-2405

INDEX NO. I-25

5-1 31-09


FORM 985 H. C. MILLER CO., MILWAUKEE

4310818016h

State of Wisconsin }
County of LANGLADE } ss.


I WILLIAM F. KELLY, do hereby
certify that on the 6th day
of FEBRUARY, 1975, I found
evidence of the SECTION
corner of SECTIONS 12, 7, 13, & 18
Township 31, North, Range
8 & 9 EAST, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:
E. DITTMAR

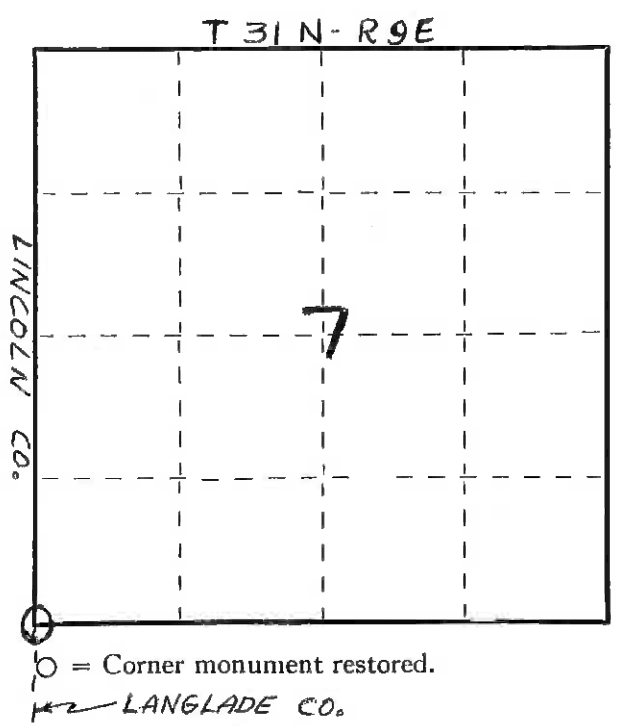

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:
GRANITE STONE MON.
SET IN THE 1920'S

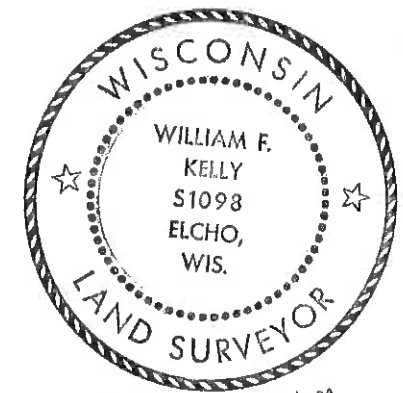


Index No. J-1
Filed


Description of corner evidence found:
LOCATED 6" x 6" GRANITE STONE LYING ON ITS SIDE. STONE HAD BEEN KNOCKED OVER BY
LOGGING OPERATION. RESIDENT WITNESS IDENTIFIED ORIGINAL LOCATION OF CORNER.
ALSO FOUND DEPRESSION IN GROUND INDICATING ORIGINAL CORNER LOCATION.

William F. Kelly

Description of monument and accessories I established to perpetuate the original location of this corner.

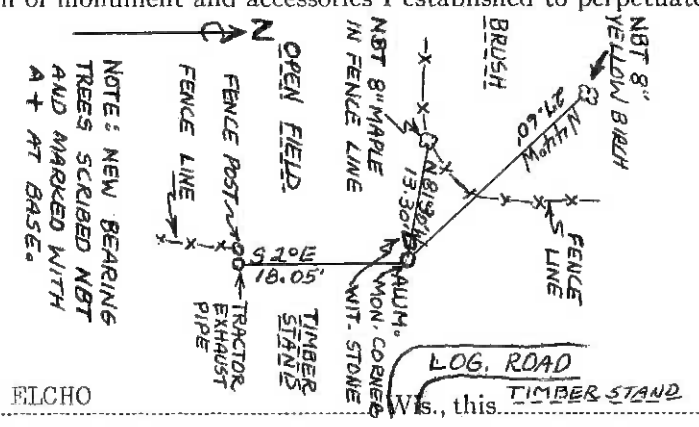

SET NEW ALUMINUM MONUMENT
FLUSH WITH GROUND AS
CORNER MONUMENT AND RESET
GRANITE STONE AS A WITNESS
CORNER. MONUMENT MARKED:



Dated at ELCHO Wis., this 6th day of FEBRUARY, 1975

Signature William F. Kelly Title REGISTERED LAND SURVEYOR Registration No. S. 1098
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy