


CERTIFIED LAND CORNER RESTORATION

Index No. X-18


State of Wisconsin }
County of Langlade } ss.

I Daniel K. Pleoger, do hereby certify that on the 30th day of October, 1980, I ~~found~~ established evidence of the W.C. 1/16 corner of Section 35 Township 34, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

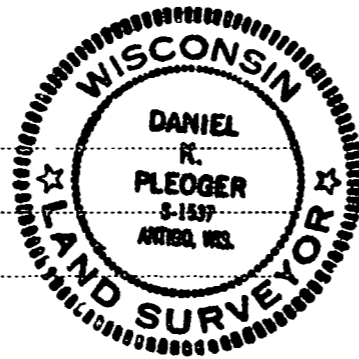

FORM 985 H. C. MILLER CO., MILWAUKEE

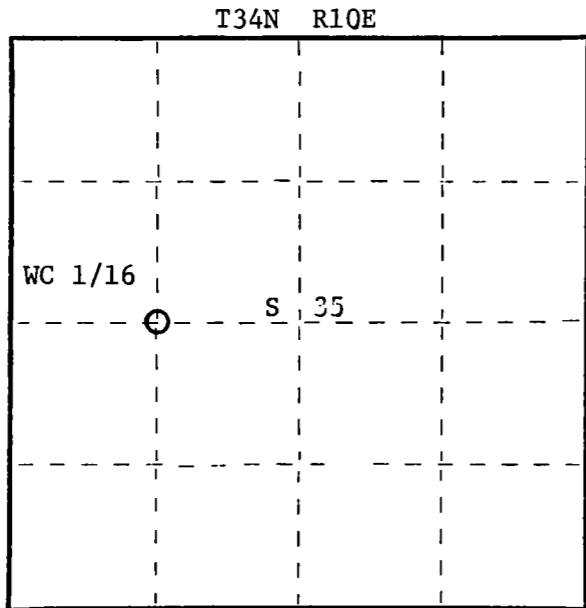

○ = Corner monument restored.

History of original corner establishment:

No record of any previous surveyor.

Description of corner evidence found:

No evidence of old corner or BT's
Corner established by running traverse from Dorr's C 1/4 corner to 1/4 corner between sections 34 and 35 for a distance of 2482.948 feet at bearing N86-04-13W. Set WC 1/16 1241.474 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" I.D. iron pipe with screw-on brass cap, stamped:
Projecting 12" above ground.
Marked NBT's:-

R.Pine 6" N14°E 9.13 feet
R.Pine 6" N89°W 5.41 feet - scribed 1/16 B.T.
R.Pine 7" S56°E 15.53 feet
T34N R10E
WC 1/16 S+35
S1537-1980

Dated at Rhinelander, Wis., this 25th day of February, 1981

Signature Daniel K. Pleoger Title Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By _____ Deputy