


4341114 0020 2022

U S PUBLIC LAND SURVEY MONUMENT RECORD - ADDENDUM

NOTE: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a-h)

A-E 7.08(3)(a) Identity of corner
SOUTH 1/4 CORNER OF SECTION 14
TOWNSHIP 34 NORTH
RANGE 11 EAST OF THE 4TH PM
TOWN OF ELCHO,
COUNTY OF LANGLADE

WISCORS - LANGLADE COUNTY
N: 443,439.994 USft (443,439.300)
E: 638,756.949 USft (638,756.700)
Datum: NAD83 (2011)
GNSS Method RTN - Direct
GNSS Control WISCORS VRS



The coordinate value shown has been verified by the average of two or more GPS observations at a markedly different time. Values shown in parenthesis, are previously published measurements.

A-E 7.08(3)(b) Description of any record evidence, monument evidence, occupational evidence, testimonial evidence, or any other material evidence.

Original Surveyor: William E. Daugherty

Date of Original Survey Commenced: July 18, 1859
Completed: July 24, 1859

Original Accessories: 8 S 13° W 54
Aspen White Pine 24 N 8° W 25

See Previous Monument Record: Index No. N-19 - April 26, 1969 - Surveyor 0001 - Robert J. Poss - THENCE:

June 22, 1976 - Surveyor 1098 - William F. Kelly - indicates this position as "4" brass cap set in concrete" on Map 40009.
March 09, 2016- Surveyor 2671 - Timothy J. Rusch - indicates this position as "fnd. brass capped mon." on Map 40506.
June 19, 2020- Surveyor 2671 - Timothy J. Rusch - indicates this position as "found brass capped monument" on Map 20510.
July 09, 2020- Surveyor 2671 - Timothy J. Rusch - indicates this position as "found brass capped monument" on Map 11040.
September 14, 2020- Surveyor 2671 - Timothy J. Rusch - indicates this position as "found brass capped monument" on Map 10207.
October 29, 2020- Surveyor 2671 - Timothy J. Rusch - indicates this position as "found brass capped monument" on Map 20514.

A-E 7.08(3)(f) Whether the corner was restored through acceptance of an obliterated location or a found perpetuated location.


March 8, 2022 - I found a 5" diameter concrete monument with a 3.5" brass tablet affixed to the top & stamped to identify the corner.

I also found 1 B.T. recovered or established as noted on Certified Land Corner Restoration N-19.

I accept this monument as a FOUND PERPETUATED LOCATION OF THE CORNER and established 3 new witnesses as shown below.

A-E 7.08(3)(c)(d)(e)(h) Plan view of corner with references to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed. The directions and distances to other public land survey corners used as evidence or used for determining the corner location.

BEARINGS LISTED TO THE NEAREST SECOND ARE REFERENCED TO WISCONSIN COUNTY COORDINATE REFERENCE SYSTEM - LANGLADE COUNTY ZONE. ALL OTHER BEARINGS ARE MAGNETIC.

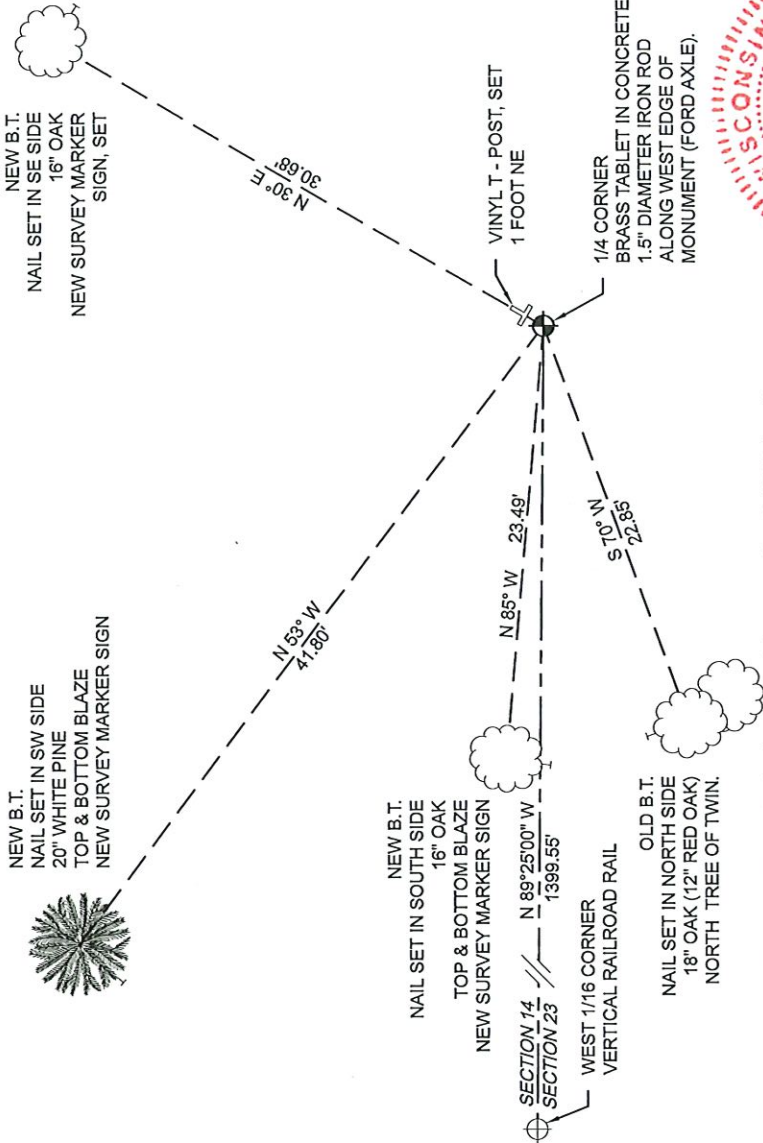

A-E 7.08(3)(i) I, Jeffrey L. DeMuth, Professional Land Surveyor No. S-2656, hereby certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge, and belief



Jeffrey L. DeMuth
SIGNATURE


August 16, 2022
DATE

FORM 985 R. C. MILLER CO., MILWAUKEE

State of Wisconsin }
County of LANGLADE } ss.

I ROBERT J. POSS, do hereby
certify that on the 26TH day
of APRIL, 1969, I found
evidence of the 1/4
corner BETWEEN SECS 14 & 23
Township 34, North, Range
11 EAST, Fourth, Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:
M. ROY BURTON

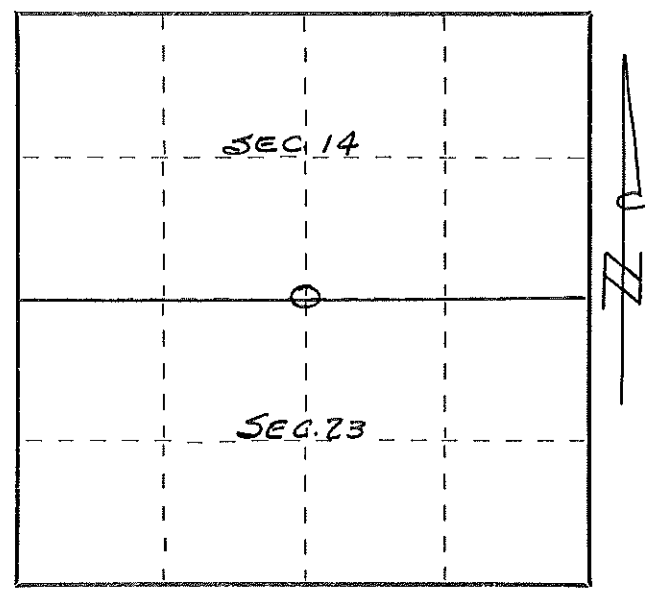


○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION


34-11
Index No. N-19

History of original corner establishment:
BELIEVED SET BY MALCOLM HUTCHINSON
CIRCA 1920.

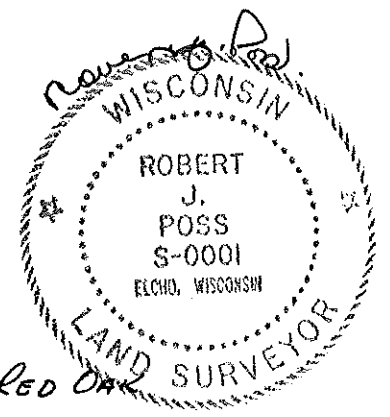

Description of corner evidence found:
MODEL "T" FORD AXLE 1 SCARRED RED OAK
NO INFORMATION ON WHO SET CORNER
NO OLD BT'S (ORIG.) SCAR ON OAK ONLY

Description of monument and accessories I established to perpetuate the original location of this corner.

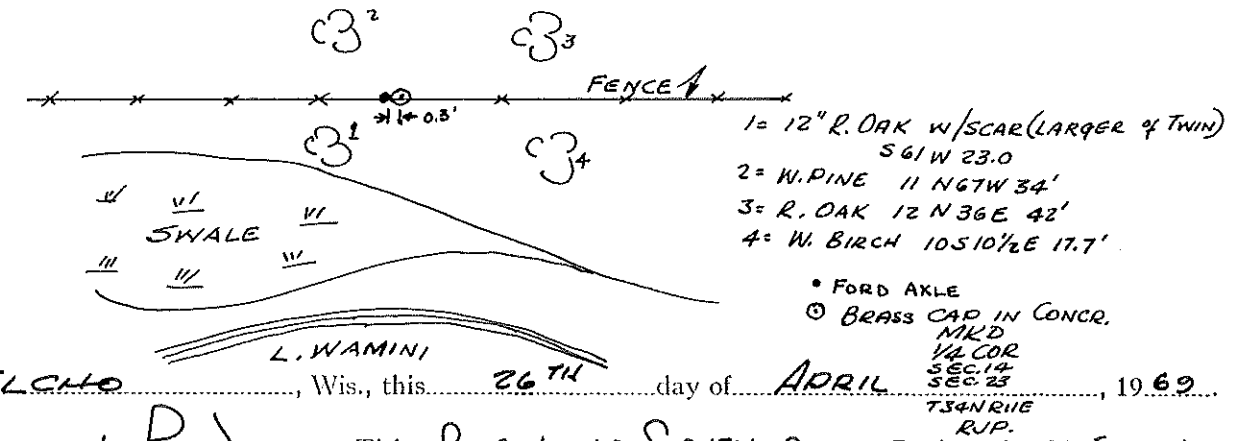

Dated at ELCHO, Wis., this 26TH day of APRIL, 1969.

Signature Robert J. Poss Title REG. LAND SURVEYOR Registration No. S-0001
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of _____, I hereby certify that the within
instrument was filed in this office for record on the _____ day of _____, 19____
at _____ o'clock _____ M.

(Register of Deeds)
By _____ Deputy

NOTE: TREES BLAZED &
SCRIBED NBT
BOTH BLAZES -
BASE OF TREE &
CHEST HIGH.