

**NORTH QUARTER CORNER, SECTION 5**  
Searched for corner and original BT's. Corner falls in backwaters of beaver pond. Established corner by single proportionate measure between the NE corner of Section 5 and the stump of an original line tree. Distances: section corner to 1/4 corner - 2640' original, 2631.23' prorated. 1/4 corner to line tree stump - 2131.80' original, 2124.72' prorated. Corner not monumented. Set witness corner/meander corner on the section line, 120.00' west of the 1/4 corner. I set the monument described in the map legend at this corner.

**NORTHWEST CORNER, SECTION 5**  
Established on an extension of a line from the NE corner of Section 5 through the recovered original line tree stump described above, and at a prorated distance from said line tree stump, using the same proportionate factor used in setting the N 1/4 corner Section 5. Distances: line tree stump to section corner - 508.20' original, 506.51' prorated. I set the monument described in the map legend at this corner.

**NORTH QUARTER CORNER, SECTION 6**  
This corner was established based on Malcolm Hutchinsons 1915 survey work in Section 6. To do this, I first computed a proportionate position for the C 1/4 corner of Section 6 based on Hutchinsons distances along the E-W quarter line. I then projected a line from the S 1/4 corner, northerly through the computed C 1/4, extended to a point of intersection with an old fence running west on the North line of the NW 1/4 of Section 6. The distance to this location agrees reasonably with Hutchinson distance to the C 1/4 of Section 6. I believe the fence mentioned was built when evidence of the 1/4 corner existed. I set the monument described in the map legend at this corner.

As part of this project, Land Corner Restoration Forms were prepared for the above 3 corners, and also for the NE corner and E 1/4 corner of Section 7.

I, David E. Tlusty, Langlade County Surveyor, do hereby certify that I have made a survey to re-establish corners on the North line of Sections 5 & 6, T33N, R14E, Langlade County, Wisconsin, as shown and described hereon.

As part of this survey and to assist in future parcel mapping, I have obtained coordinates in the Langlade County Coordinate System (LCCS) on numerous PLSS corners as shown hereon. Some corners have been directly observed with RTK GPS equipment, some coordinates have been taken from WDDOT right-of-way maps and Nicolet National Forest (NNF) maps and converted to LCCS values, and some coordinates have been computed. Although I believe that reasonable care, by myself, the WDDOT and NNF surveyors, has been used in the measuring techniques upon which these coordinates are based, caution and field checking of this data is advised before using these values for property surveys.

I further certify that this map is a true and correct representation of said survey, and that this survey is correct to the best of my knowledge and belief.


November 30, 2000  
David E. Tlusty, RLS1390  
Langlade Co. Surveyor

**LEGEND**

- 2" x 30" iron pipe with brass cap set (unless noted otherwise)
- 1 1/4" iron pipe found
- aluminum capped monument found
- iron pipe with brass cap found
- 3/4" x 30" rebar set

GPS observed with RTK GPS *NAD83(91)*  
WDDOT coordinate values taken from STH '55' plans, converted to LCCS, and shifted to match observed values at the S1/4x S18, the S1/4x S6, and the SE corner S18. Mon. described on plans.  
NNF lat/long values taken from a 1997 USFS map of the North & East lines of Sec. 33, and converted to LCCS values.  
NNF calc position computed from data shown on 1989 USFS map of Section 4, after GPS observation on the W 1/4 corner of Section 4, and using the converted USFS lat/long on the NE corner of Section 4.  
Hutch. Malcolm Hutchinson measurements 1915-1917±

Bearings shown are Langlade County Coordinate System grid bearings.

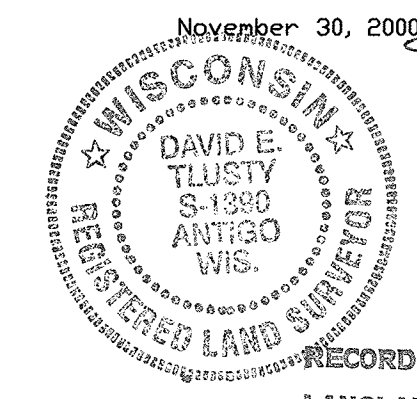

RECORD # 40336  
LANGLADE COUNTY SURVEYORS OFFICE  
DATE FILED: 11/5/00 BY: D. Tlusty

Scale: 1" = 1000'

**Langlade County Surveyor**  
Poor Farm Road area  
Sec. 33 in T33N, R14E & 32  
Sections 4, 5, 6, 18 & 16 in T33N, R14E,  
Langlade County, WI

Date: 11/29/00 Dwg: poorfarm\_rd\_area